

H 2780 BP 30 Inch Convection Oven in a perfectly combinable design with Self Clean.



- 7-segment display with knob – EasyControl
- Minimal cleaning effort – Self-cleaning
- Unlimited possibilities – volume of 4.59 cu. ft. on 6 levels
- Gentle door movement – SoftOpen & SoftClose
- Protects against burns – touch-cool fronts

EAN: 4002516487234 / Material number: 11805320 / Old Material Number: 22278045USA

Construction type and design	
Built-in wall oven	•
ContourLine	•
Appliance color	Clean Touch Steel
Convenience features	
Rapid PreHeat	•
Operating modes	
Broiling operating modes	•
Maxi Broil	•
Surround	•
Bake	•
Convection Roast	•
Control panel	
Individual settings	•
User convenience	
Control panel	EasyControl
SoftOpen	•
SoftClose	•
Timers	•
Time of day display	•
Minute minder	•
Programming end of cooking duration	•
Programmable cooking time	•
Cleaning convenience	
Clean Touch Steel surface	•
Self-cleaning	•
Catalyzer	•
CleanGlass door	•
Safety	
Appliance cooling system and cool touch front	•
System lock	•
Door lock during self cleaning	•
Technical data	
Cavity volume in cu.ft (l)	4.59 (130)
No. of rack levels	6
Number of shelf levels oven compartment 1	6
Number of shelf levels oven compartment 2	6
Labeling of rack levels	•
Oven interior lighting	2 halogen spots
TwinPower hot air fans	•
Temperatures in °F (°C)	85-575 (30-300)
Niche width min. in inches (mm)	28 5/8 (724)
Niche width max. in inches (mm)	28 5/8 (724)
Niche height min. in inches (mm)	28 3/8 (718)
Niche height max. in inches (mm)	28 3/8 (718)
Niche depth in in. (mm)	24 1/8 (610)
Appliance width in in. (mm)	29 7/8 (757)
Appliance height in in. (mm)	28 5/8 (727)
Appliance depth in in. (mm)	24 3/4 (626)
Weight in lbs. (kg)	178 (80.5)


H 2780 BP 30 Inch Convection Oven in a perfectly combinable design with Self Clean.




EAN: 4002516487234 / Material number: 11805320 / Old Material Number: 22278045USA

Weight in lbs. (kg)	177.47 (80.5)
Weight in lbs. (kg)	178 (80.5)
Total connected load in kW	6.50
Power Rating in V	120
Voltage in V	240/208
Frequency in Hz	60
Number of phases	1
Fuse rating in A	30
Connection wire with plug	•
Length of power cord in in. (m)	1.80
Accessories supplied	
PerfectClean universal baking tray	1
Baking and roasting rack	1
Removable side racks (pair)	1


H 2780 BP 30 Inch Convection Oven in a perfectly combinable design with Self Clean.

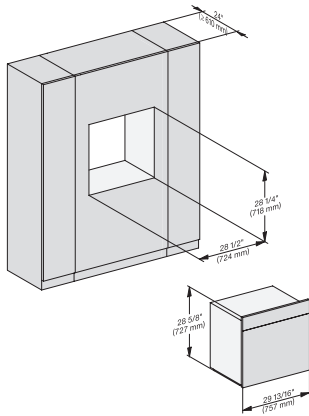


H6x8xBP, H6x80-2BP, H2x80BP, H7x8xBP(X), fitting wide front, installation drawing, Proud, NA
7/8" – 22" mm – Glas, 15/16" – 23.3** mm – Edelstahl

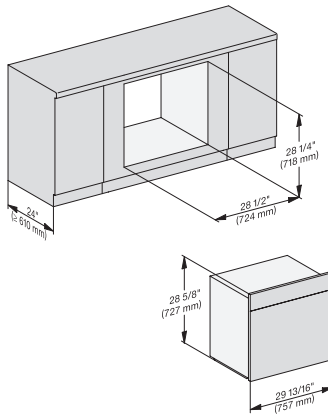


H 6x8x BP, H 6x80-2BP, H2x80BP, H7x8xBP(X), fitting wide front built-under, installation drawing, Proud, NA
7/8" – 22" mm – Glas, 15/16" – 23.3** mm – Edelstahl

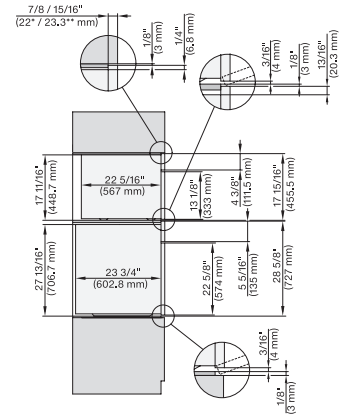


DGC 6x00-1 + EBA 6808, H 6x80 BP, H 6x80-2BP, DGC 7x4x, EBA7848, H2x80, H7xxx Combi, Install. drawing, Flush inset, NA
7/8" – 22" mm – Glas, 15/16" – 23.3** mm – Edelstahl

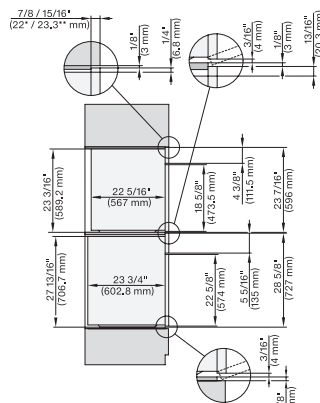


DGC 6x6x (AM), H 6x80 BP, H6x80-2BP, DGC786x, EBA7868, H7xxx, H2xxx Combi, Installation drawing, Flush inset, NA
7/8" – 22" mm – Glas, 15/16" – 23.3** mm – Edelstahl

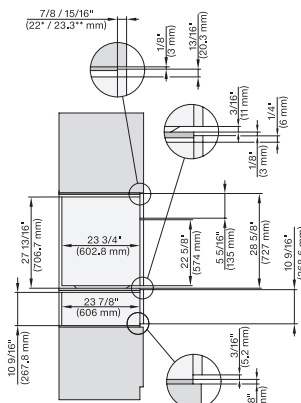


H 6x80 BP, ESW 6x80, H 6x80-2BP, H2x80, H7x80m ESW7x80 Combi, Installation drawing, Flush inset, NA
7/8" – 22" mm – Glas, 15/16" – 23.3** mm – Edelstahl

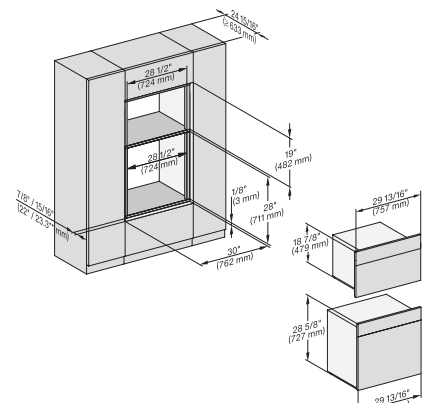


H 6x80 BP, H 6x70 BM, H 6x80-2BP, DGC7x7x, H7xxx Fitting Combi, Installation drawing, Flush inset, NA

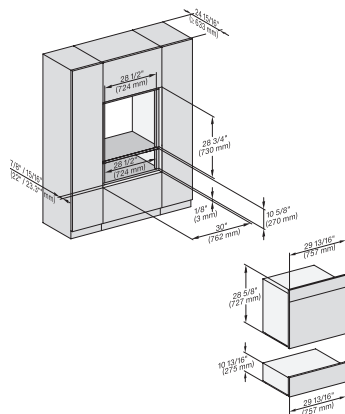

H 6x80 BP, ESW 6x80, H 6x80-2BP, DGC7x8x, H7x8x, ESW7x80, H 2x8x Fitting Combi, Installation drawing, Flush inset, NA

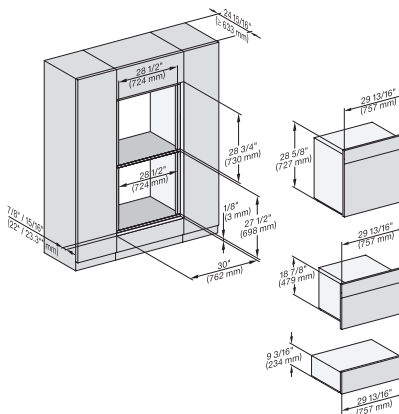


H 6x80 BP, H 6x70 BM, ESW 6x85, H 6x80-2BP, H7xxx BM/BX, H2x80BP, ESW7x70, EVS7670 Installation drawing, Flush inset, NA

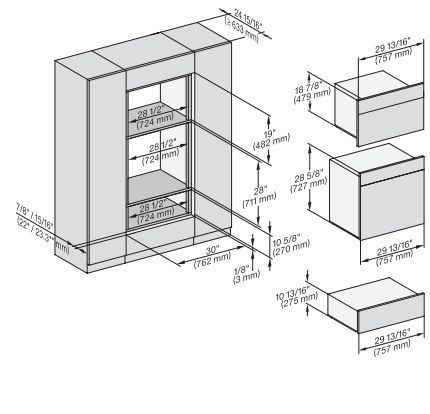


H 6x80 BP, H 6x70 BM, ESW 6x80, H 6x80-2BP, DGC7xxx, H7xxxBM/BMX/BP/BPX, H2x80BP, ESW7x80, Installation drawing, NA


H 2780 BP 30 Inch Convection Oven in a perfectly combinable design with Self Clean.

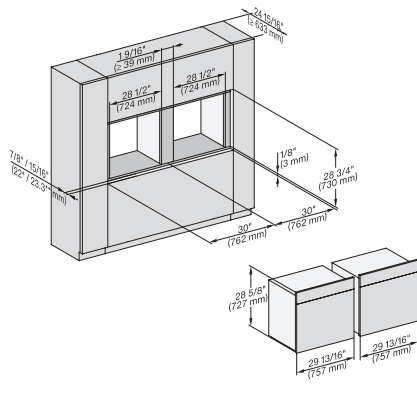


H 6x80 BP, H 6x80-2BP, H 2x80BP, H 7x80BP/PBX Fitting Combi side by side, Installation drawing, Flush inset, NA

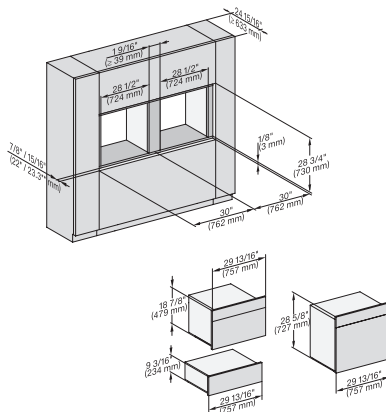


H 6x80BP, H 6x70 BM, ESW 6x85, H 6x80-2BP, H7xxx BM/BP/BPX, ESW7x70, EVS7670, Installation drawing, Flush inset, NA

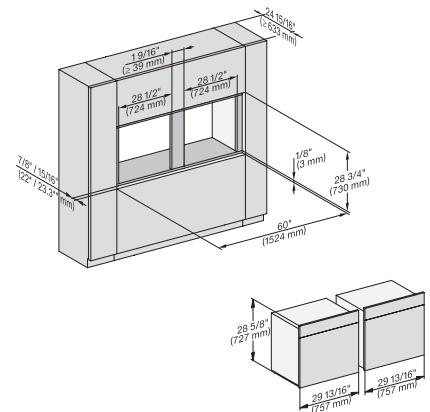


H 6x80 BP, H 6x80-2BP, H 2x80BP, H7x80BP/BPX, Installation drawing, Flush inset, NA

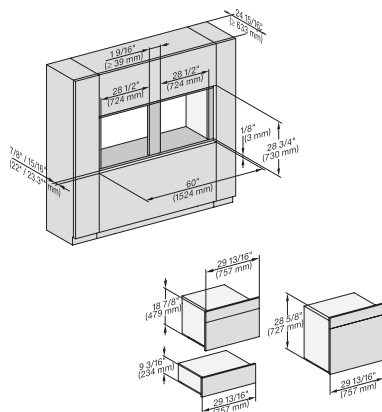


H 6x80 BP, H 6x70 BM, ESW 6x85, H 6x80-2BP, H 7xxx BP/BM/BPX/BMX, EXX 7x70 Fitting Combi side by side without wall, NA

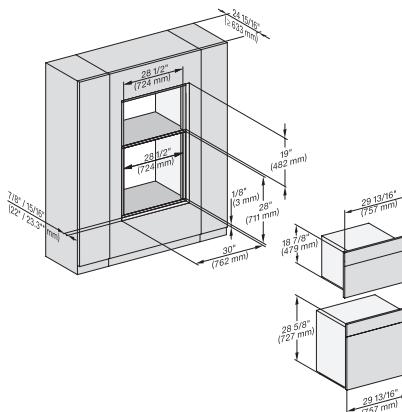


H 6x80 BP, H 6x70 BM, H 6x80-2BP, DGC 7x7x, H7xxx x BM/BP/BPX, H 2880 PB, Installation drawing, Flush inset, NA

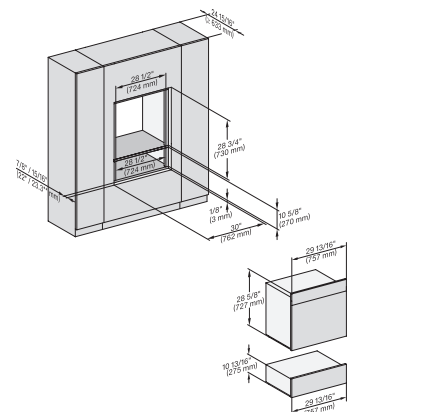


H 6x80 BP, ESW 6x80, H 6x80-2BP, DGC 7x8x, H 2x80BP, H 7x80 BP/BPX, ESW 7x80 Installation drawing, Flush inset, NA

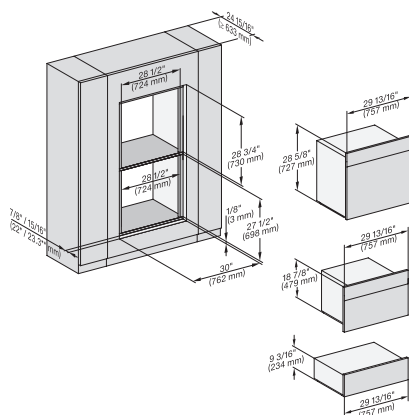

H 6x80 BP, H 6x70 BM, ESW 6x85, H 6x80-2BP, H2x80BP, H7xx0BP/BM/BPX, ESW7x70, EVS7670 Flush inset, NA

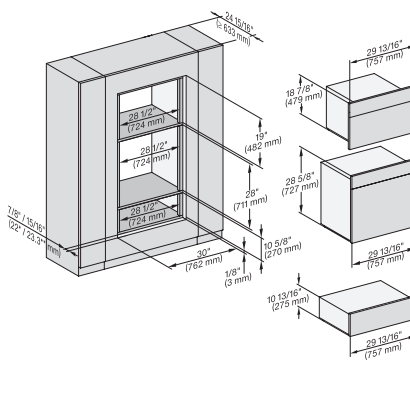


H 6x80 BP, H 6x70 BM, ESW 6x80, H 6x80-2BP, DGC7x7x, H7xxxBM/BMX/BP, H2xxxBP, ESW7xxx, NA

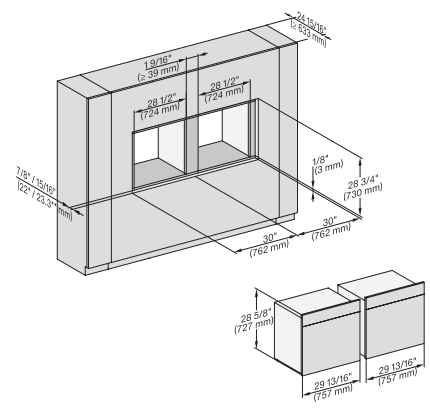

H 6x80 BP, H 6x80-2BP, H 2x80BP, H 7x80 BP/BPX Fitting Combi wide front side by side, Install. drawing, Flush inset, NA

in a perfectly combinable design with Self Clean.

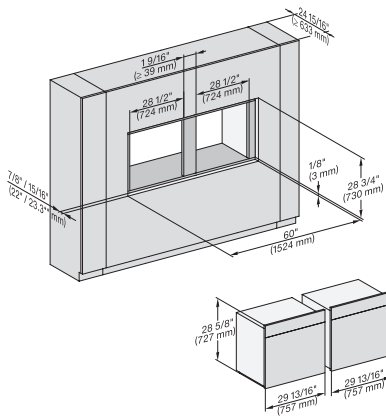

Technical drawings of the 1000 mm wide cabinet showing front, side, and top views with dimensions in inches and millimeters.

- Front View:** Shows a cabinet with a total width of 34 1/8" (869 mm) and a depth of 19 1/8" (488 mm). The top panel is 1 1/8" (29 mm) thick. The main body is 24 1/4" (613 mm) high. The bottom panel is 1 1/8" (29 mm) thick. The side panel is 1 1/8" (29 mm) thick. The door is 19 1/8" (488 mm) high and 17 1/8" (438 mm) wide. The door handle is 1 1/8" (29 mm) wide. The door is shown in an open position, revealing the interior shelves and drawers. The interior shelves are 19 1/8" (488 mm) high and 17 1/8" (438 mm) wide. The interior drawers are 19 1/8" (488 mm) high and 17 1/8" (438 mm) wide. The interior shelves and drawers are shown in a closed position.
- Side View:** Shows the cabinet's depth of 19 1/8" (488 mm) and the top panel thickness of 1 1/8" (29 mm). The side panel is 1 1/8" (29 mm) thick. The door is 19 1/8" (488 mm) high and 17 1/8" (438 mm) wide. The door handle is 1 1/8" (29 mm) wide. The door is shown in an open position, revealing the interior shelves and drawers. The interior shelves are 19 1/8" (488 mm) high and 17 1/8" (438 mm) wide. The interior drawers are 19 1/8" (488 mm) high and 17 1/8" (438 mm) wide. The interior shelves and drawers are shown in a closed position.
- Top View:** Shows the cabinet's width of 34 1/8" (869 mm) and depth of 19 1/8" (488 mm). The top panel is 1 1/8" (29 mm) thick. The main body is 24 1/4" (613 mm) high. The bottom panel is 1 1/8" (29 mm) thick. The side panel is 1 1/8" (29 mm) thick. The door is 19 1/8" (488 mm) high and 17 1/8" (438 mm) wide. The door handle is 1 1/8" (29 mm) wide. The door is shown in an open position, revealing the interior shelves and drawers. The interior shelves are 19 1/8" (488 mm) high and 17 1/8" (438 mm) wide. The interior drawers are 19 1/8" (488 mm) high and 17 1/8" (438 mm) wide. The interior shelves and drawers are shown in a closed position.

Technical drawing of a window frame assembly. The main view shows a 3D perspective of the frame with dimensions: 44 5/16" (1130 mm) for the total width and 6 1/2" (165 mm) for the depth. Two circular callouts with exclamation marks point to specific areas. Below the main view, there are two cross-sectional views labeled 'A' and 'A''. The 'A' view shows a cross-section of the frame with a width of 1 1/2" (38 mm) and a height of 1 1/2" (38 mm). The 'A'' view shows a cross-section of the frame with a width of 1 1/2" (38 mm) and a height of 1 1/2" (38 mm). The bottom view shows a top-down perspective of the frame with dimensions: 24 1/4" (610 mm) for the width, 28 7/16" (722 mm) for the depth, and 25 13/16" (655 mm) for the total width. The right side view shows a side profile of the frame with dimensions: 27 5/16" (700 mm) for the total height, 1 3/16" (26 mm) for the top flange, 1" (25 mm) for the main body, and 4 1/8" (105 mm) for the bottom flange. The bottom view also shows dimensions: 4 1/8" (105 mm) for the bottom flange, 28 3/4" (730 mm) for the depth, and 70 5/16" (1790 mm) for the total width. The bottom view also shows the labels '650' and 'ESW'.

Technical drawings of the ESW 1000 cabinet showing front, side, and top views with dimensions in inches and millimeters.

Front View:

- Overall width: 35.43" (900 mm)
- Overall height: 44.13" (1120 mm)
- Top panel height: 1.18" (30 mm)
- Side panel height: 1.18" (30 mm)
- Bottom panel height: 1.18" (30 mm)
- Internal height: 41.77" (1060 mm)
- Internal width: 33.00" (838 mm)
- Internal depth: 24.14" (613 mm)
- Internal width (excluding side panels): 29.51" (749 mm)
- Internal depth (excluding side panels): 20.70" (527 mm)
- Internal width (excluding side panels and top/bottom panels): 26.14" (664 mm)
- Internal depth (excluding side panels and top/bottom panels): 17.87" (453 mm)
- Internal width (excluding side panels and top/bottom panels): 14.17" (359 mm)
- Internal depth (excluding side panels and top/bottom panels): 11.30" (287 mm)
- Internal width (excluding side panels and top/bottom panels): 8.66" (220 mm)
- Internal depth (excluding side panels and top/bottom panels): 5.91" (150 mm)
- Internal width (excluding side panels and top/bottom panels): 3.15" (80 mm)
- Internal depth (excluding side panels and top/bottom panels): 1.18" (30 mm)

Side View:


- Overall width: 35.43" (900 mm)
- Overall height: 44.13" (1120 mm)
- Top panel height: 1.18" (30 mm)
- Side panel height: 1.18" (30 mm)
- Bottom panel height: 1.18" (30 mm)
- Internal height: 41.77" (1060 mm)
- Internal width: 33.00" (838 mm)
- Internal depth: 24.14" (613 mm)
- Internal width (excluding side panels): 29.51" (749 mm)
- Internal depth (excluding side panels): 20.70" (527 mm)
- Internal width (excluding side panels and top/bottom panels): 26.14" (664 mm)
- Internal depth (excluding side panels and top/bottom panels): 17.87" (453 mm)
- Internal width (excluding side panels and top/bottom panels): 14.17" (359 mm)
- Internal depth (excluding side panels and top/bottom panels): 11.30" (287 mm)
- Internal width (excluding side panels and top/bottom panels): 8.66" (220 mm)
- Internal depth (excluding side panels and top/bottom panels): 5.91" (150 mm)
- Internal width (excluding side panels and top/bottom panels): 3.15" (80 mm)
- Internal depth (excluding side panels and top/bottom panels): 1.18" (30 mm)

Top View:

- Overall width: 35.43" (900 mm)
- Overall height: 44.13" (1120 mm)
- Top panel height: 1.18" (30 mm)
- Side panel height: 1.18" (30 mm)
- Bottom panel height: 1.18" (30 mm)
- Internal height: 41.77" (1060 mm)
- Internal width: 33.00" (838 mm)
- Internal depth: 24.14" (613 mm)
- Internal width (excluding side panels): 29.51" (749 mm)
- Internal depth (excluding side panels): 20.70" (527 mm)
- Internal width (excluding side panels and top/bottom panels): 26.14" (664 mm)
- Internal depth (excluding side panels and top/bottom panels): 17.87" (453 mm)
- Internal width (excluding side panels and top/bottom panels): 14.17" (359 mm)
- Internal depth (excluding side panels and top/bottom panels): 11.30" (287 mm)
- Internal width (excluding side panels and top/bottom panels): 8.66" (220 mm)
- Internal depth (excluding side panels and top/bottom panels): 5.91" (150 mm)
- Internal width (excluding side panels and top/bottom panels): 3.15" (80 mm)
- Internal depth (excluding side panels and top/bottom panels): 1.18" (30 mm)


A – Cut-out (4" x 28" / 100 mm x 720 mm) in the bottom of the cabinet for power cord and ventilation., – Electrical and water supplies are recommended to be placed in adjacent cabinetry., Additional cabinet depth is required when placing the electrical and water supplies behind the appliance., E = Electric connection

H 2780 BP 30 Inch Convection Oven in a perfectly combinable design with Self Clean.

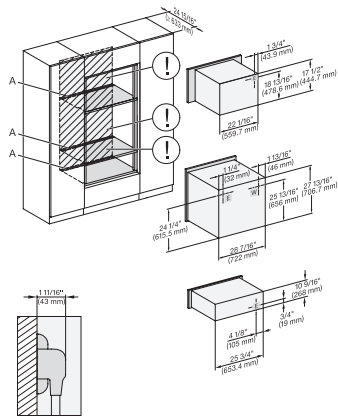


H 6x80BP, H 6x70 BM, ESW 6x80, H 6x80-2BP, H 2880BP, H 7xxxBP/BPX/BM/BMX, ESW 7x80 Installation drawing, Flush inset, NA

A – Cut-out (4" x 28" / 100 mm x 720 mm) in the bottom of the cabinet for power cord and ventilation, – Electrical and water supplies are recommended to be placed in adjacent cabinetry., Additional cabinet depth is required when placing the electrical and water supplies behind the appliance., E = Electric connection

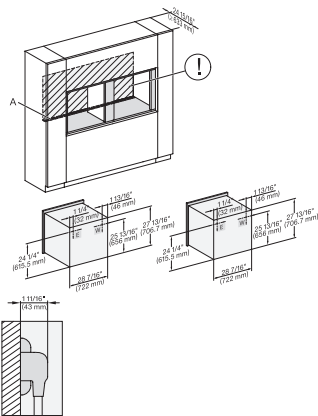


H 6x80 BP, H 6x80-2BP, H 2x80BP, H 7x80BP/BPX Combi, side by side, Installation drawing, Flush inset, NA

A – Cut-out (4" x 28" / 100 mm x 720 mm) in the bottom of the cabinet for power cord and ventilation, – Electrical and water supplies are recommended to be placed in adjacent cabinetry., Additional cabinet depth is required when placing the electrical and water supplies behind the appliance., E = Electric connection

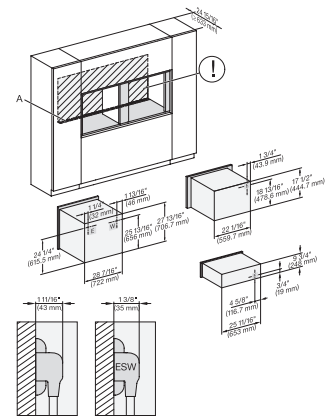


H 6x80BP, H 6x70BM, ESW 6x85, H 6x80-2BP, H 2x80BP, H 7x80BP/BPX, ESW 7x70, EVS7670, Install. drawing, Flush inset, NA

A – Cut-out (4" x 28" / 100 mm x 720 mm) in the bottom of the cabinet for power cord and ventilation, – Electrical and water supplies are recommended to be placed in adjacent cabinetry., Additional cabinet depth is required when placing the electrical and water supplies behind the appliance., E = Electric connection

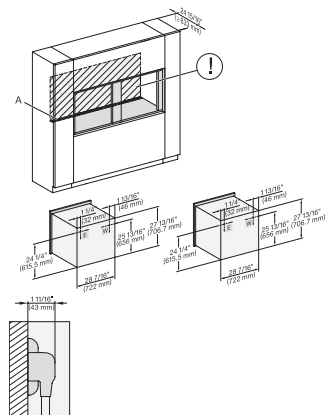


H 6x80 BP, H 6x80-2BP, H 2x80BP/BPX, H 7x80BP/BPX, Installation drawing, Flush inset, NA

A – Cut-out (4" x 28" / 100 mm x 720 mm) in the bottom of the cabinet for power cord and ventilation, – Electrical and water supplies are recommended to be placed in adjacent cabinetry., Additional cabinet depth is required when placing the electrical and water supplies behind the appliance., E = Electric connection

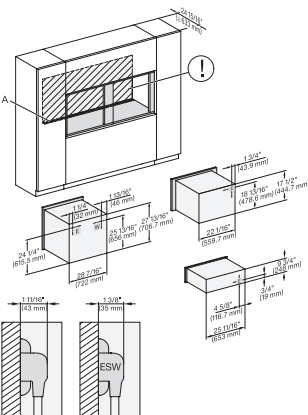

H 6x80 BP, H 6x70 BM, ESW 6x85, H 6x80-2BP, H 2x80BP, H 7x80BP/BPX, ESW 7x70, EVS 7670 , drawing, Flush inset, NA







A – Cut-out (4" x 28" / 100 mm x 720 mm) in the bottom of the cabinet for power cord and ventilation, – Electrical and water supplies are recommended to be placed in adjacent cabinetry., Additional cabinet depth is required when placing the electrical and water supplies behind the appliance., E = Electric connection

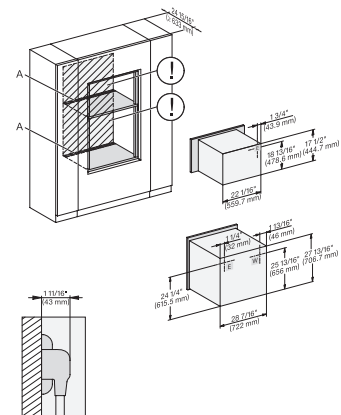


H 6x80 BP, H 6x70 BM, H 6x80-2BP, H 2x80BP, H 7x80BP/BPX Installation drawing, Flush inset, NA

A – Cut-out (4" x 28" / 100 mm x 720 mm) in the bottom of the cabinet for power cord and ventilation, – Electrical and water supplies are recommended to be placed in adjacent cabinetry., Additional cabinet depth is required when placing the electrical and water supplies behind the appliance., E = Electric connection

in a perfectly combinable design with Self Clean.




H 2780 BP 30 Inch Convection Oven in a perfectly combinable design with Self Clean.

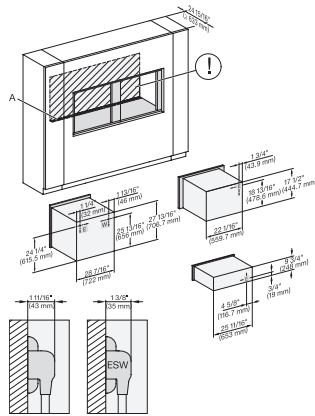


H6x80 BP, H6x70 BM, ESW6x85, H6x80-2BP, H2x80BP, H7x80 BP/BPX, ESW7x70, EVS 7670, Flush inset, NA

A – Cut-out (4" x 28" / 100 mm x 720 mm) in the bottom of the cabinet for power cord and ventilation. – Electrical and water supplies are recommended to be placed in adjacent cabinetry. Additional cabinet depth is required when placing the electrical and water supplies behind the appliance. E = Electric connection

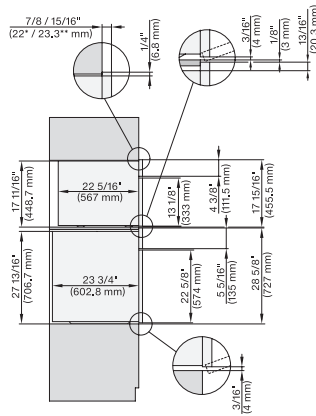


DGC 6x00-1 + EBA 6808, H 6x80BP, H6x80-2BP, DGC7x4x+EBA7848, H2x80BP, H7x80BP(X), Combi, Installation drawing, Proud, NA

7/8" – 22" mm – Glas, 15/16" – 23.3" mm – Edelstahl

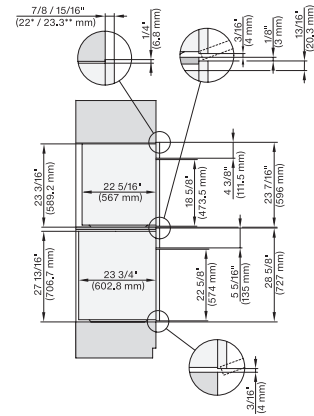


DGC 6x6x (AM), H 6x80 BP, H6x80-2BP, DGC786x+EBA7868, H2x80BP, H80BP(X), Combi, Installation drawing, Proud, NA

7/8" – 22" mm – Glas, 15/16" – 23.3" mm – Edelstahl

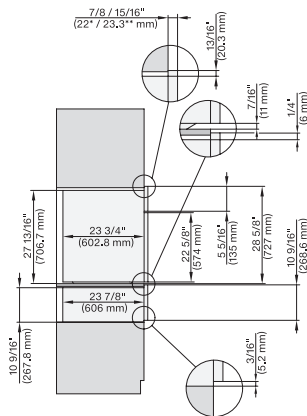


H 6x80 BP, ESW 6x80, H 6x80-2BP, H2x80BP, H7x80BP(X), ESW7x80, Combi, Installation drawing, Proud, NA

7/8" – 22" mm – Glas, 15/16" – 23.3" mm – Edelstahl

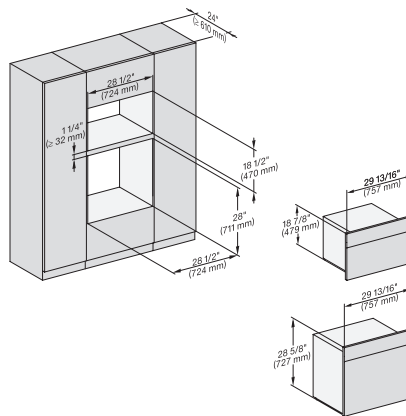


H6x80BP, H6x70BM, H6x80-2BP, DGC7x7x, H7x70BM, H2x80BP, H7x80BP(X), Fitting Combi, Installation drawing, Proud, NA

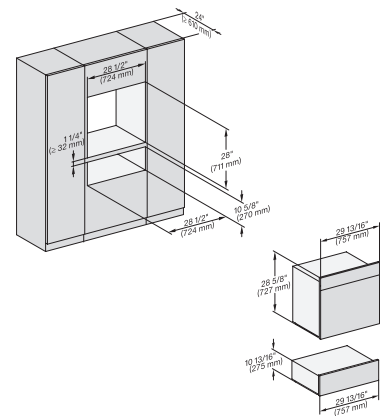


H6x80BP, ESW6x80, H6x80-2BP, DGC7xxx, H2x80BP, H7x80BPX, ESW7x80, Fitting Combi, Installation drawing, Proud, NA


H 2780 BP 30 Inch Convection Oven in a perfectly combinable design with Self Clean.

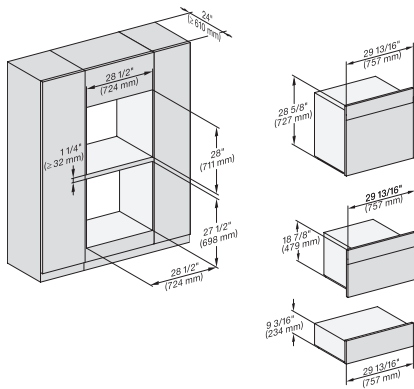


H6x80BP, H6x70BM, ESW 6x85, H 6x80-2BP, NA7000, Fitting Combi, Installation drawing, Proud, NA

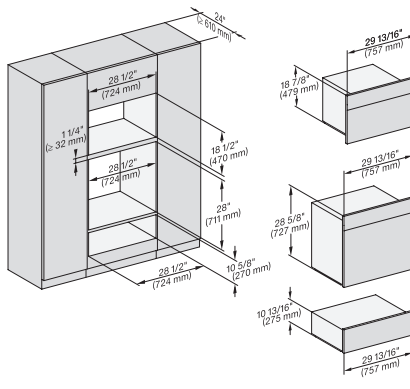


H 6x80 BP, H 6x70 BM, ESW 6x85, H 6x80-2BP, NA7000 Fitting Combi, Installation drawing, Proud, NA
<https://miele-mms.de/miele.net/mms/admin/forward.php#>

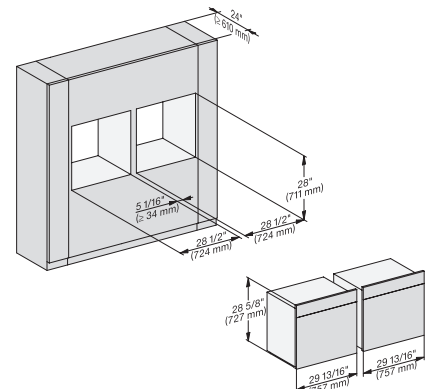


H 6x80 BP, H 6x80-2BP, NA7000, Fitting Combi side by side, Installation drawing, Proud, NA

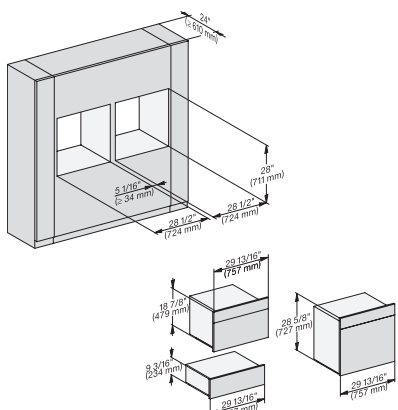


H 6x80 BP, H 6x70 BM, ESW 6x85, H 6x80-2BP, NA7000, Fitting Combi side by side, Installation drawing, Proud, NA

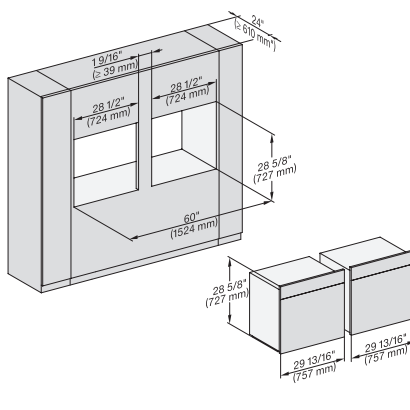


H 6x80 BP, H 6x80-2BP, NA7000 Fitting Combi side by side without wall, Installation drawing, Proud, NA

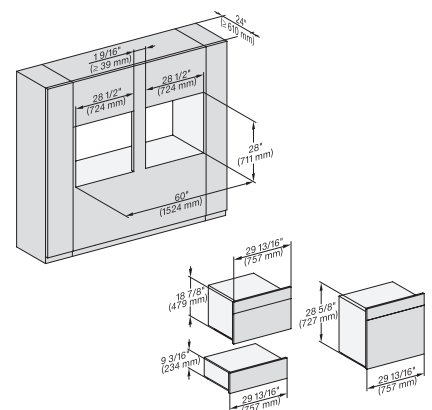


H6x80BP, H6x70BM, ESW6x85, H6x80-2BP, NA7000, Fitting Combi side by side without wall, Installation drawing, Proud, NA

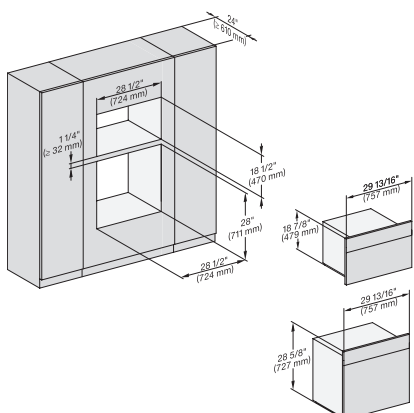

H6x80BP, H 6x70 BM, H 6x80-2BP, NA7000 Fitting Combi wide front, Installation drawing, Proud, NA

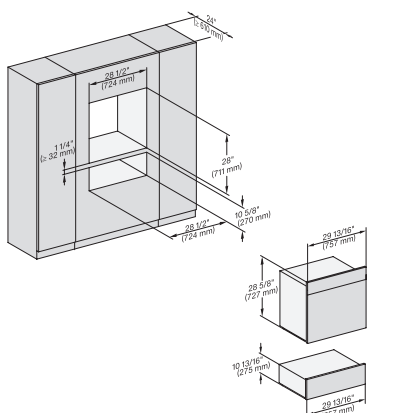


H 6x80 BP, ESW 6x85, H 6x80-2BP, NA7000 Fitting Combi wide front, Installation drawing, Proud, NA

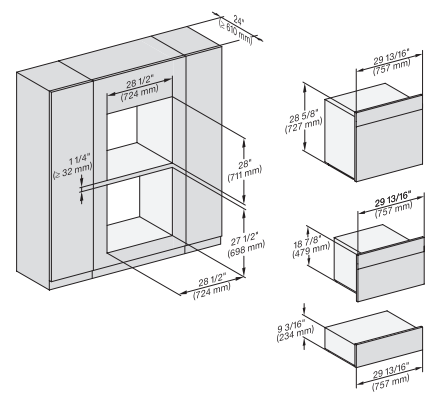


H 6x80 BP, H 6x70 BM, ESW 6x85, H 6x80-2BP, NA7000 Fitting Combi wide front, Installation drawing, Proud, NA


H 2780 BP 30 Inch Convection Oven in a perfectly combinable design with Self Clean.

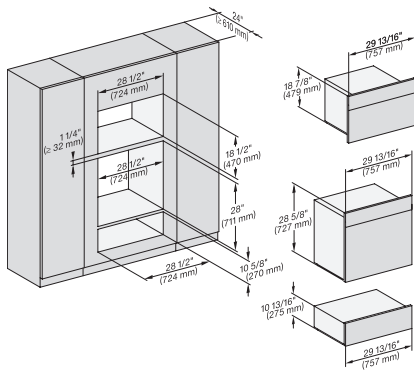


H 6x80 BP, H 6x70 BM, ESW 6x80, H 6x80-2BP, NA7000, Fitting Combi wide front, Installation drawing, Proud, NA

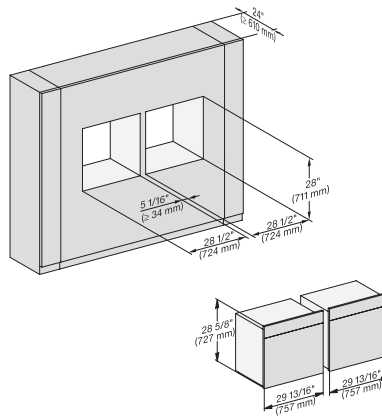


H 6x80 BP, H 6x80-2BP, H2x80BP, H7x80BP(X), Fitting Combi wide front side by side, Installation drawing, Proud, NA

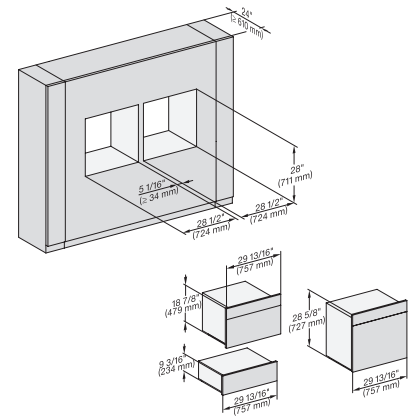


H 6x80 BP, H 6x70 BM, ESW 6x85, H 6x80-2BP, NA7000 Fitting Combi wide front side by side, Installation drawing, Proud

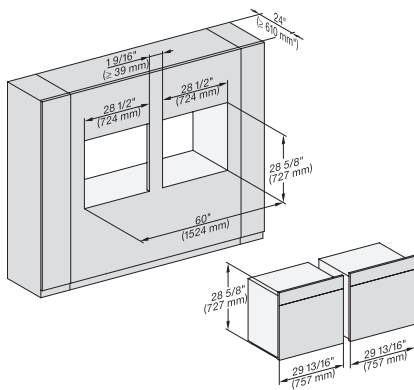

H 6x80 BP, H 6x80-2BP, NA7000 Fitting Combi wide front side by side without wall, Installation drawing, Proud, NA

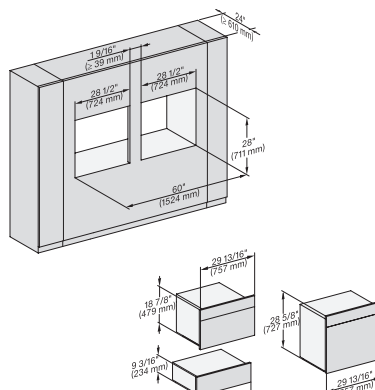


H 6x80 BP, H 6x70 BM, ESW 6x85, H 6x80-2BP, NA7000 Fitting Combi w. front side by side without wall, drawing, Proud, NA

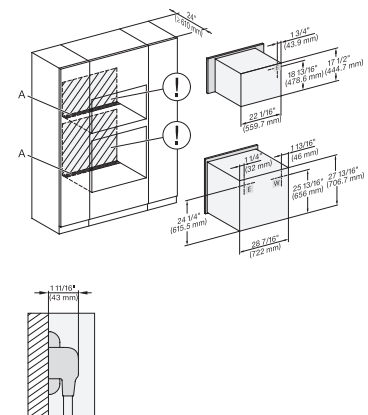

H 6x80 BP, H 6x70 BM, H 6x80-2BP, Hx70BM, H2x80BP(X), H7x80BP(X), Installation Combi, Installation drawing, Proud, NA


A – Cut-out (4" x 28" / 100 mm x 720 mm) in the bottom of the cabinet for power cord and ventilation, – Electrical and water supplies are recommended to be placed in adjacent cabinetry., Additional cabinet depth is required when placing the electrical and water supplies behind the appliance., E = Electric connection

H 2780 BP 30 Inch Convection Oven in a perfectly combinable design with Self Clean.

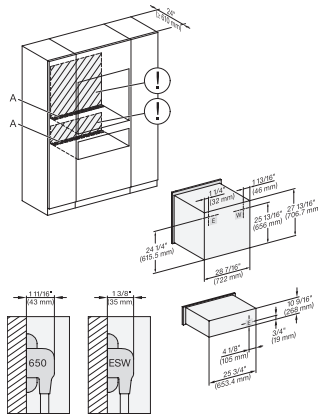


H 6x80 BP, ESW 6x80, H 6x80-2BP, H2x80BP, H7x80BP, ESW7x80, Installation Combi, Installation drawing, Proud, NA

A – Cut-out (4" x 28" / 100 mm x 720 mm) in the bottom of the cabinet for power cord and ventilation. – Electrical and water supplies are recommended to be placed in adjacent cabinetry. Additional cabinet depth is required when placing the electrical and water supplies behind the appliance. E = Electric connection

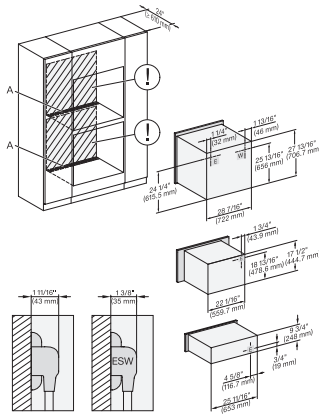


H 6x80 BP, H 6x70 BM, ESW 6x85, H 6x80-2BP, NA7000 Installation Combi, Installation drawing, Proud, NA

A – Cut-out (4" x 28" / 100 mm x 720 mm) in the bottom of the cabinet for power cord and ventilation. – Electrical and water supplies are recommended to be placed in adjacent cabinetry. Additional cabinet depth is required when placing the electrical and water supplies behind the appliance. E = Electric connection

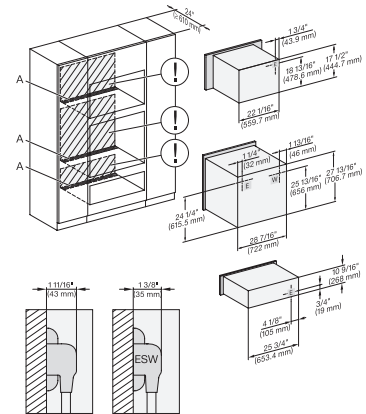


H 6x80 BP, H 6x70 BM, ESW 6x80, H 6x80-2BP, NA7000, Installation Combi, Installation drawing, Proud, NA

A – Cut-out (4" x 28" / 100 mm x 720 mm) in the bottom of the cabinet for power cord and ventilation. – Electrical and water supplies are recommended to be placed in adjacent cabinetry. Additional cabinet depth is required when placing the electrical and water supplies behind the appliance. E = Electric connection

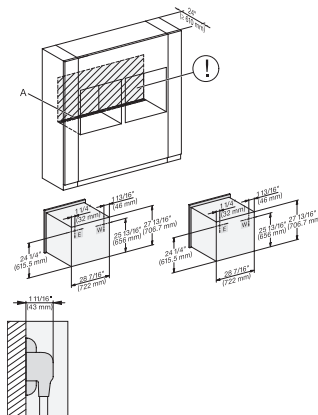


H 6x80 BP, H 6x80-2BP, H2x80BP, H7x80BP, Installation Combi, side by side, Installation drawing, Proud, NA

A – Cut-out (4" x 28" / 100 mm x 720 mm) in the bottom of the cabinet for power cord and ventilation. – Electrical and water supplies are recommended to be placed in adjacent cabinetry. Additional cabinet depth is required when placing the electrical and water supplies behind the appliance. E = Electric connection

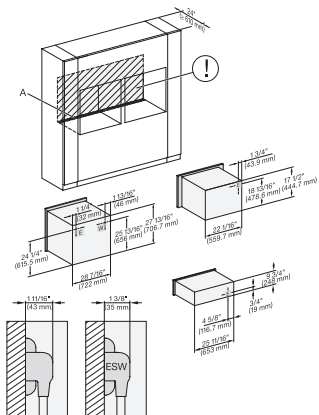

H6x80(-2)BP, H6x70BM, ESW6x85, H2x80BP, H7x80BP, ESW7x70, EVS7670, Installation Combi side by side, Installation drawing


A – Cut-out (4" x 28" / 100 mm x 720 mm) in the bottom of the cabinet for power cord and ventilation. – Electrical and water supplies are recommended to be placed in adjacent cabinetry. Additional cabinet depth is required when placing the electrical and water supplies behind the appliance. E = Electric connection

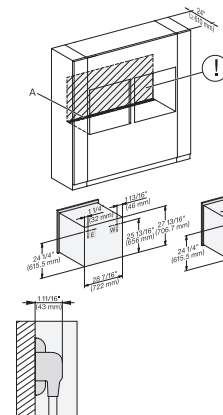

H 6x80 BP, H 6x80-2BP, H2x80BP, H7x80BP(X), Installation Combi side by side without wall, Installation drawing, Proud, NA


A – Cut-out (4" x 28" / 100 mm x 720 mm) in the bottom of the cabinet for power cord and ventilation. – Electrical and water supplies are recommended to be placed in adjacent cabinetry. Additional cabinet depth is required when placing the electrical and water supplies behind the appliance. E = Electric connection

H 2780 BP 30 Inch Convection Oven in a perfectly combinable design with Self Clean.

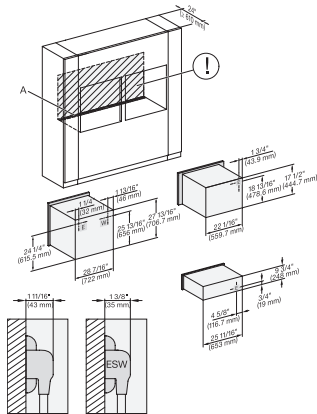


H 6x80 BP, H 6x70 BM, ESW 6x85, H 6x80-2BP, NA7000, Installation Combi side by side without wall, drawing, Proud, NA

A – Cut-out (4" x 28" / 100 mm x 720 mm) in the bottom of the cabinet for power cord and ventilation. – Electrical and water supplies are recommended to be placed in adjacent cabinetry. Additional cabinet depth is required when placing the electrical and water supplies behind the appliance. E = Electric connection

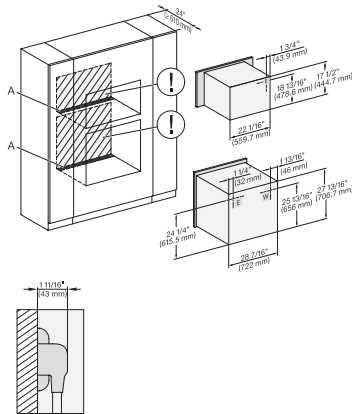


H 6x80 BP, H 6x70 BM, H 6x80-2BP, NA7000, Installation Combi wide front, Installation drawing, Proud, NA

A – Cut-out (4" x 28" / 100 mm x 720 mm) in the bottom of the cabinet for power cord and ventilation. – Electrical and water supplies are recommended to be placed in adjacent cabinetry. Additional cabinet depth is required when placing the electrical and water supplies behind the appliance. E = Electric connection

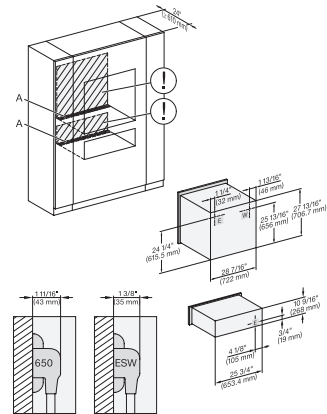


H 6x80 BP, ESW 6x80, H 6x80-2BP, NA7000, Installation Combi wide front, Installation drawing, Proud, NA

A – Cut-out (4" x 28" / 100 mm x 720 mm) in the bottom of the cabinet for power cord and ventilation. – Electrical and water supplies are recommended to be placed in adjacent cabinetry. Additional cabinet depth is required when placing the electrical and water supplies behind the appliance. E = Electric connection

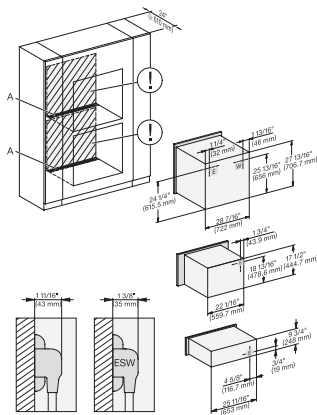


H 6x80 BP, H 6x70 BM, ESW 6x85, H 6x80-2BP, NA7000, Installation Combi wide front, Installation drawing, Proud, NA

A – Cut-out (4" x 28" / 100 mm x 720 mm) in the bottom of the cabinet for power cord and ventilation. – Electrical and water supplies are recommended to be placed in adjacent cabinetry. Additional cabinet depth is required when placing the electrical and water supplies behind the appliance. E = Electric connection

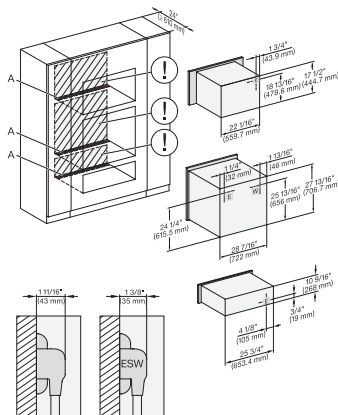

H 6x80 BP, H 6x70 BM, ESW 6x80, H 6x80-2BP, NA7000, Installation Combi wide front, Installation drawing, Proud, NA


A – Cut-out (4" x 28" / 100 mm x 720 mm) in the bottom of the cabinet for power cord and ventilation. – Electrical and water supplies are recommended to be placed in adjacent cabinetry. Additional cabinet depth is required when placing the electrical and water supplies behind the appliance. E = Electric connection

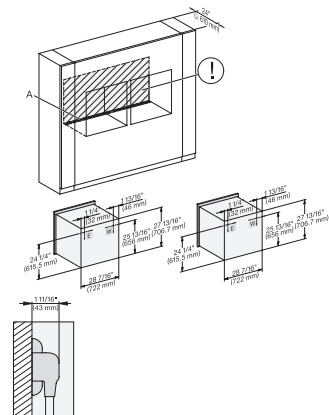

H 6x80 BP, H 6x80-2BP, H2x80BP, H7x80BP, Installation Combi wide front side by side, Installation drawing, Proud, NA


A – Cut-out (4" x 28" / 100 mm x 720 mm) in the bottom of the cabinet for power cord and ventilation. – Electrical and water supplies are recommended to be placed in adjacent cabinetry. Additional cabinet depth is required when placing the electrical and water supplies behind the appliance. E = Electric connection

H 2780 BP 30 Inch Convection Oven in a perfectly combinable design with Self Clean.

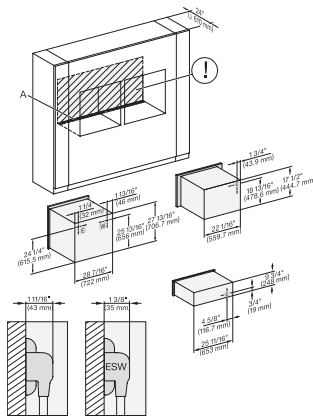


H6x80(2)BP, H6x70BM, ESW6x85, H2x80BP, H7x80BP, Installation Combi wide front side by side, Installation drawing, Proud

A – Cut-out (4" x 28" / 100 mm x 720 mm) in the bottom of the cabinet for power cord and ventilation, – Electrical and water supplies are recommended to be placed in adjacent cabinetry., Additional cabinet depth is required when placing the electrical and water supplies behind the appliance., E = Electric connection

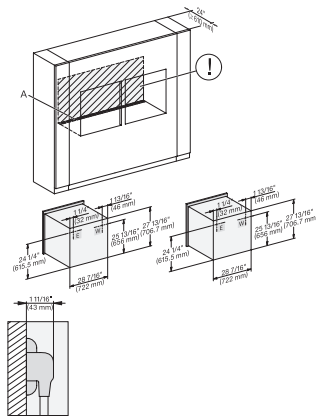


H6x80BP, H6x80-2BP, H2x80BP, H7x80BP, Installation Combi wide front side by side without wall, Installation drawing

A – Cut-out (4" x 28" / 100 mm x 720 mm) in the bottom of the cabinet for power cord and ventilation, – Electrical and water supplies are recommended to be placed in adjacent cabinetry., Additional cabinet depth is required when placing the electrical and water supplies behind the appliance., E = Electric connection

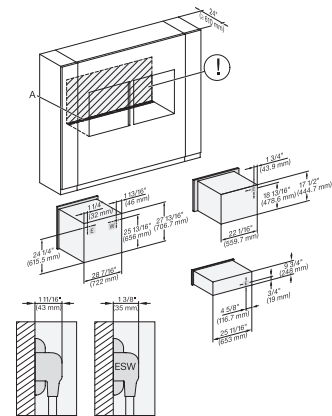


H6x80 BP, H6x70BM, ESW6x85, H6x80-2BP, NA7000, Installation Combi w. front side by side without wall, drawing, Proud, NA

A – Cut-out (4" x 28" / 100 mm x 720 mm) in the bottom of the cabinet for power cord and ventilation, – Electrical and water supplies are recommended to be placed in adjacent cabinetry., Additional cabinet depth is required when placing the electrical and water supplies behind the appliance., E = Electric connection

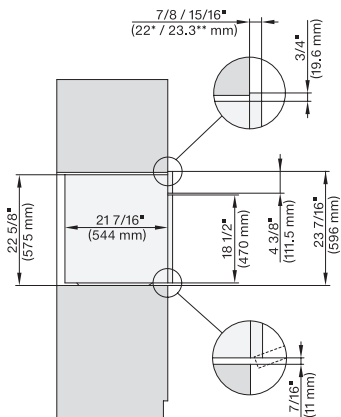


H2x80BP, side view, 30 Zoll, Proud, Discovery

7/8" – 22" mm – Glass, 15/16" – 23.3** mm – Stainless steel

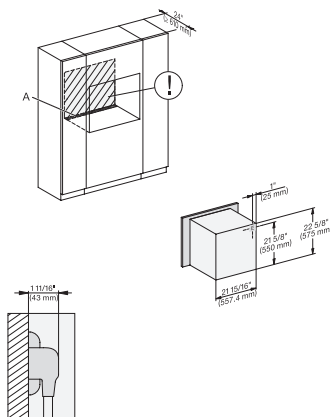

H2x80BP, Installation, 30 Zoll, Proud, Discovery


A – Cut-out (4" x 28" / 100 mm x 720 mm) in the bottom of the cabinet for power cord and ventilation, – Electrical and water supplies are recommended to be placed in adjacent cabinetry., Additional cabinet depth is required when placing the electrical and water supplies behind the appliance., E = Electric connection

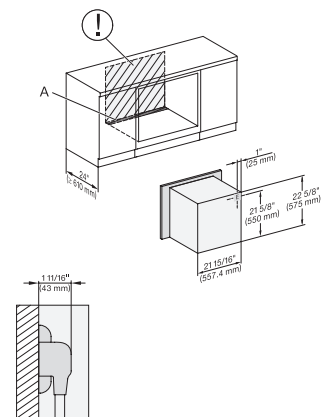

H2x80BP, Installation, 30 Zoll, Proud, built-under, Discovery


A – Cut-out (4" x 28" / 100 mm x 720 mm) in the bottom of the cabinet for power cord and ventilation, – Electrical and water supplies are recommended to be placed in adjacent cabinetry., Additional cabinet depth is required when placing the electrical and water supplies behind the appliance., E = Electric connection

H 2780 BP 30 Inch Convection Oven in a perfectly combinable design with Self Clean.

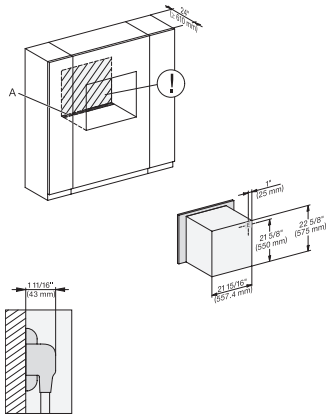


H2x80BP, Installation, 30 Zoll, Proud, wide front, Discovery

A – Cut-out (4" x 28" / 100 mm x 720 mm) in the bottom of the cabinet for power cord and ventilation. – Electrical and water supplies are recommended to be placed in adjacent cabinetry. Additional cabinet depth is required when placing the electrical and water supplies behind the appliance. E = Electric connection

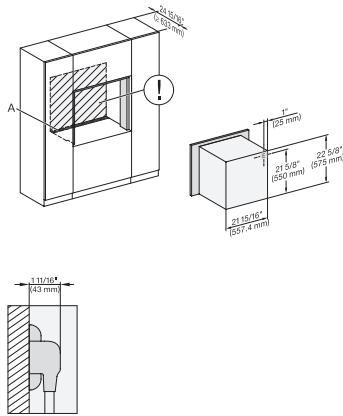


H2x80BP, Installation, 30 Zoll, Flush inset, Discovery

A – Cut-out (4" x 28" / 100 mm x 720 mm) in the bottom of the cabinet for power cord and ventilation. – Electrical and water supplies are recommended to be placed in adjacent cabinetry. Additional cabinet depth is required when placing the electrical and water supplies behind the appliance. E = Electric connection

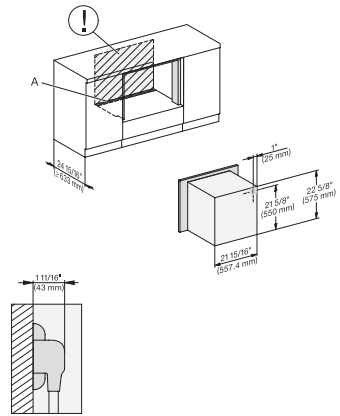


H2x80BP, Installation, 30 Zoll, Flush inset, built-under, Discovery

A – Cut-out (4" x 28" / 100 mm x 720 mm) in the bottom of the cabinet for power cord and ventilation. – Electrical and water supplies are recommended to be placed in adjacent cabinetry. Additional cabinet depth is required when placing the electrical and water supplies behind the appliance. E = Electric connection

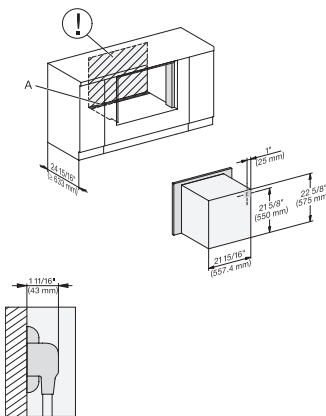


H2x80BP, Installation, 30 Zoll, Flush inset, built-under, wide front, Discovery

A – Cut-out (4" x 28" / 100 mm x 720 mm) in the bottom of the cabinet for power cord and ventilation. – Electrical and water supplies are recommended to be placed in adjacent cabinetry. Additional cabinet depth is required when placing the electrical and water supplies behind the appliance. E = Electric connection

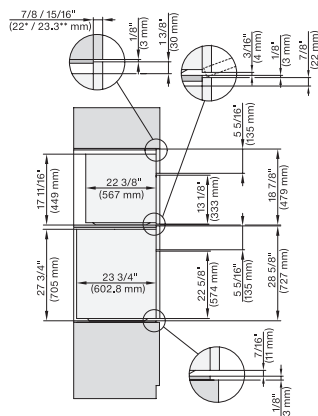

DGC7x7(X), H7x8(X)BP, side view, 30 Zoll, Flush inset, combi, XL, 650


7/8" – 22" mm – Glass, 15/16" – 23.3" mm – Stainless steel

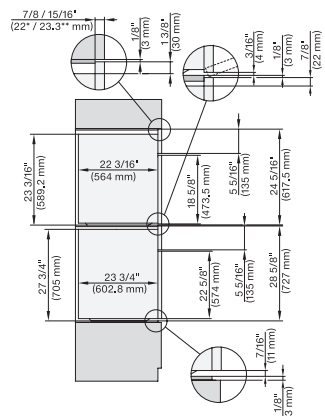

DGC7x8x, H2x80BP, H7x8(X)BP(X), side view, 30 Zoll, Flush inset, combi, XXL 650


7/8" – 22" mm – Glass, 15/16" – 23.3" mm – Stainless steel

H 2780 BP 30 Inch Convection Oven in a perfectly combinable design with Self Clean.

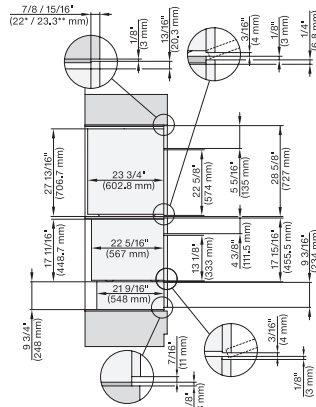


DGC7x4x+EBA7848, H2x80BP, H7x8xBP(X), ESW7x70, EVS7670, side view, 30 Zoll, Flush inset, combi, XL, 650

7/8" – 22" mm – Glass, 15/16" – 23.3" mm – Stainless steel

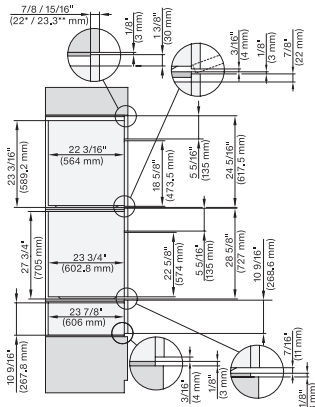


DGC7x8x(X), H2x80BP, H7x8xBP, ESW7x80, side view, 30 Zoll, Flush inset, combi, XXL, 650, ESW30

7/8" – 22" mm – Glass, 15/16" – 23.3" mm – Stainless steel

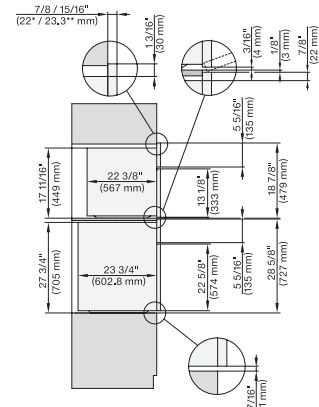


DGC7xxx, H2x80BP, H7x8xBP(X), side view, 30 Zoll, Proud, combi, XL, 650

7/8" – 22" mm – Glass, 15/16" – 23.3" mm – Stainless steel

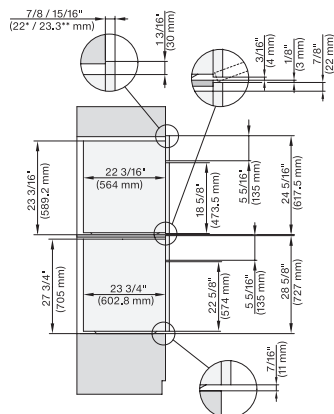


DGC7x8x, H2x80BP, H7x8xBP(X), side view, 30 Zoll, Proud, combi, XXL 650

7/8" – 22" mm – Glass, 15/16" – 23.3" mm – Stainless steel

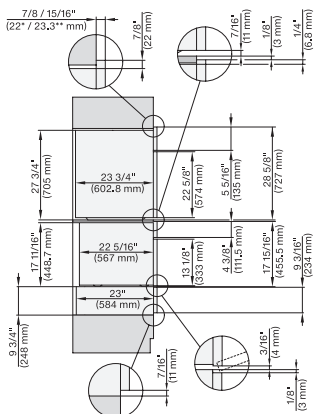

DGC7x4x+EBA7848, H7x80BP, H7x8xBP(X), ESW7x70, EVS7670, side view, 30 Zoll, Proud, combi, XL, 650


7/8" – 22" mm – Glass, 15/16" – 23.3" mm – Stainless steel

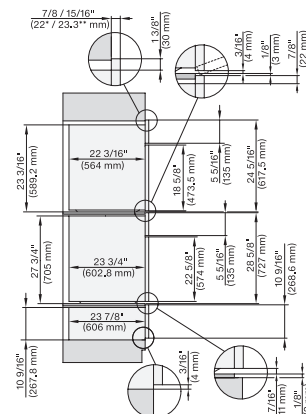

DGC7x8x(X), H2x80BP, H7x8xBP(X), ESW7x80, side view, 30 Zoll, Proud, combi, XXL, 650


7/8" – 22" mm – Glass, 15/16" – 23.3" mm – Stainless steel

H 2780 BP
30 Inch Convection Oven
in a perfectly combinable design with Self Clean.

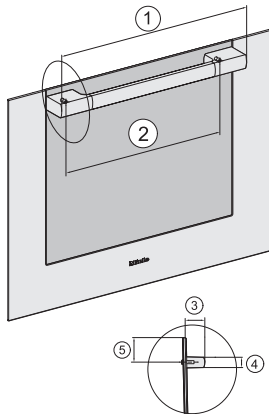

Handle 30" DGC73xx, DGC75xx, DGC77xx, H71xx, H75xx, H77xx, ContourLine – NA7000 - Installation drawing

21 1/8" / 536 mm, 17 1/2" / 444 mm, 2 1/2" / 64 mm, 1 3/8" / 35 mm, 1 7/16" / 37 mm

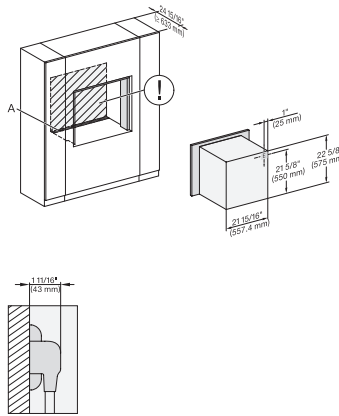

H2780BP, H2880BP, inset, 30 Zoll, Flush – NA

A – Cut-out (4" x 28" / 100 mm x 720 mm) in the bottom of the cabinet for power cord and ventilation, ! – Electrical and water supplies are recommended to be placed in adjacent cabinetry., Additional cabinet depth is required when placing the electrical and water supplies behind the appliance., E = Electric connection