DWHD660EPR SAPPHIRE® DISHWASHER

CUSTOM PANEL













Home Connect

Also Available:

DWHD660EFP – Flat Stainless Steel Panel with Professional Collection Handle

DWHD660EFM – Flat Stainless Steel Panel with Masterpiece® Collection Handle

FEATURES & BENEFITS

- ★ StarDry™ No one dries better. Star Dry with Zeolite: the
 ultra-powerful program that dries dishes better so place
 settings, glassware, and even sturdy plastics and containers
 with hard-to-reach crevices are ready for use immediately
 after each cycle
- ★ Sapphire Glow® light illuminates with the sparkling blue light when the dishwasher is open
 - The Zone Control™ Spray Arm amplifies the exceptional PowerWash™ performance by letting you customize the cleaning power to deep clean even the most challenging dishes, in the lower rack.
 - The Blue PowerBeam® projects a blue light onto the floor to indicate when the dishwasher is in use.
 - Adjustable Chef's Tool Drawer® delivers added loading capacity as well as flexibility to accommodate larger or smaller items, wider ends and utensil handles
 - Flexible folding tines fold down to accommodate larger pots, pans, and dishes and add flexibility to hold items twice as wide as previous models and significantly wider than competitor
 - Smooth-glide ball bearing wheels on lower, upper, and third racks
 - Exceptionally Quiet 44 dBA for a peaceful kitchen experience
 - Use the exclusive Home Connect® app to refine your cleanup routine with remote control and receive timely notifications that keep track of every dish tab so you never run out.
 - Push to Open† uses Auto Door Opening technology to open the door with a push, adding a luxurious touch and the option for a sleek, handle-less design

| GENERAL PROPERTIES | | |
|---|--|--|
| | / /A to Nicos 1 0 : 1 | |
| Number of Wash Cycles | 6 (Auto, Normal, Quick, Hand Wash, Pots & Pans, Favorite) | |
| Additional Wash Cycles in Home Connect® | 3 (Machine Care, Rinse, Glass) | |
| Number of Options | 4 (Remote Start, Sanitize, StarDry™, ZoneControl™) | |
| Additional Options in Home Connect® | 1 (Save Time) | |
| NSF®-Certified* Sanitize Option | Yes | |
| dBA | 44 dBA | |
| Third Rack | Adjustable Chef's Tool Drawer® | |
| Rack Adjustability | Rackmatic 3-Stage | |
| Tub Material | Stainless Steel | |
| Concealed Water Heating Element | Yes | |
| Leak Protection System | 24/7 AquaStop® | |
| Water Softener | No | |
| Five-Level Wash | Yes | |
| Childlock | No | |
| Home Connect® (Wi-Fi Enabled) | Yes | |
| EFFICIENCY | | |
| Water Usage Per Cycle | 3.2 g | |
| CEE Energy Efficiency Class | Tier 1 | |
| ENERGY STAR® Certified | Yes | |
| Total Annual Energy Consumption | 240 kWh | |
| Total Annual Water Consumption | 623.5 g | |
| CAPACITY | | |
| Number of Place Settings | 16 | |
| TECHNICAL DETAILS | | |
| Watts | 1,440 W | |
| | ',' | |
| Current | 12 A | |
| Volts Volts | · | |
| | 12 A | |
| Volts | 12 A 120 V | |
| Volts Frequency | 12 A 120 V 60 Hz | |
| Volts Frequency Power Cord Length Power Cord Install Length from Corner of | 12 A 120 V 60 Hz 67" Left - 45" | |
| Volts Frequency Power Cord Length Power Cord Install Length from Corner of Unit when Facing the Door | 12 A 120 V 60 Hz 67" Left - 45" Right - 56" | |
| Volts Frequency Power Cord Length Power Cord Install Length from Corner of Unit when Facing the Door Minimum Water Pressure | 12 A 120 V 60 Hz 67 " Left - 45 " Right - 56" 14 (lb/sin) | |
| Volts Frequency Power Cord Length Power Cord Install Length from Corner of Unit when Facing the Door Minimum Water Pressure Max. Temperature for Water Intake | 12 A 120 V 60 Hz 67" Left - 45" Right - 56" 14 (lb/sin) 140° F | |
| Volts Frequency Power Cord Length Power Cord Install Length from Corner of Unit when Facing the Door Minimum Water Pressure Max. Temperature for Water Intake Length Inlet Hose | 12 A 120 V 60 Hz 67 " Left - 45 " Right - 56 " 14 (lb/sin) 140° F N/A | |
| Volts Frequency Power Cord Length Power Cord Install Length from Corner of Unit when Facing the Door Minimum Water Pressure Max. Temperature for Water Intake Length Inlet Hose Length Outlet Hose | 12 A 120 V 60 Hz 67 " Left - 45 " Right - 56 " 14 (lb/sin) 140° F N/A | |
| Volts Frequency Power Cord Length Power Cord Install Length from Corner of Unit when Facing the Door Minimum Water Pressure Max. Temperature for Water Intake Length Inlet Hose Length Outlet Hose DIMENSIONS & WEIGHT | 12 A 120 V 60 Hz 67 " Left - 45 " Right - 56 " 14 (lb/sin) 140° F N/A 90.5 " 33 7/8" × 23 9/16" × 23 3/4" | |
| Volts Frequency Power Cord Length Power Cord Install Length from Corner of Unit when Facing the Door Minimum Water Pressure Max. Temperature for Water Intake Length Inlet Hose Length Outlet Hose DIMENSIONS & WEIGHT Overall Appliance Dimensions (HxWxD) | 12 A 120 V 60 Hz 67 " Left - 45 " Right - 56 " 14 (lb/sin) 140° F N/A 90.5 " | |

^{*}Certification to NSF/ANSI Standard 184 for residential dishwashers

DWHD660EPR SAPPHIRE® DISHWASHER


CUSTOM PANEL



| WARRANTY | |
|---|-----------------|
| Limited Warranty, Entire Appliance, Parts and Labor | 2 Year |
| Limited Warranty for Microprocessor or Printed Circuit Board; Parts Only | 3rd to 5th Year |
| Limited Warranty for Racks (Does Not Include Rack Components); Parts Only | 3rd to 5th Year |
| Limited Warranty for Rust-through On Inner Tub Liner; Parts Only | Lifetime |

| ACCESSORIES (OPTIONAL) | | |
|---|------------|--|
| Dishwasher Installation Kit (Junction Box, 90° Elbow and Water Supply Hose) | SMZ3IN1UC | |
| Dishwasher Supply and Drainage Hose Extension 76 3/4" | SGZ1010UC | |
| Junction Box | SMZPCJB1UC | |
| Cabinet Protector with Power Cord Clip | SMZEPCC1UC | |
| Water Supply Hose | SMZSH1ABUC | |

DISHWASHER & CUTOUT DIMENSIONS

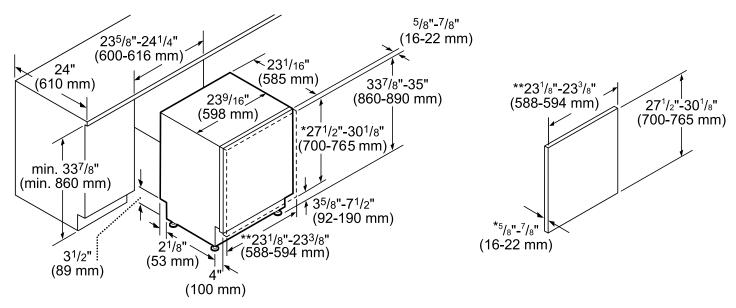

- * measured from the bottom edge of the countertop panel thickness recommended 3/4" (20 mm) panel weight 11–18 lb. (5–8 kg)
- ** 24" (610 mm) wide panel may be used depending on cabinet design

measurements in inches and mm

These warranties give you specific legal rights and you may have other rights that vary from state to state. Limited warranty from date of delivery. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.

1800 735 4328 | USA THERMADOR.COM | CANADA THERMADOR.CA | ©2025 BSH HOME APPLIANCES CORPORATION. ALL RIGHTS RESERVED.

Page 2 of 2 10 / 25