


DATA SHEET

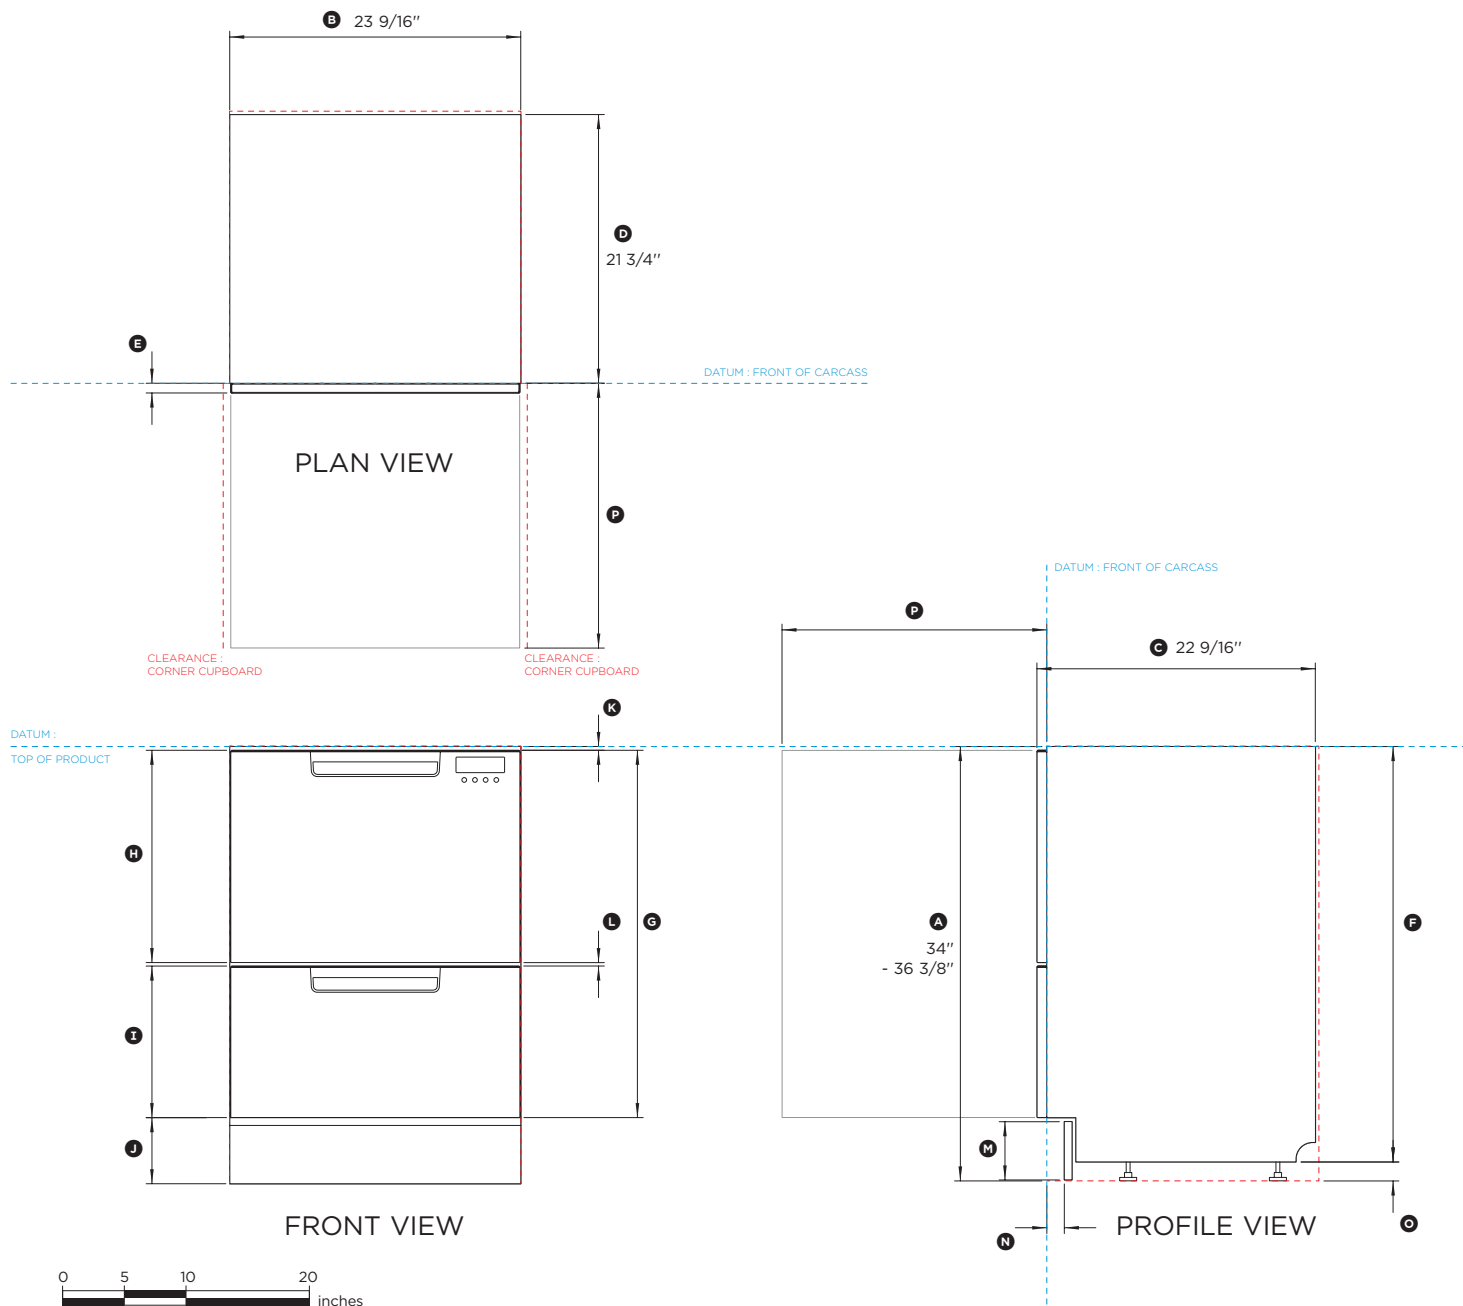

24" DOUBLE DISHDRAWER™ TALL

Model no:

DD24DCTX9, DD24DCTX9

(refer page 2 for metric measurements)

Dimensions	in
Ⓐ Overall height* of DishDrawer™	34" - 36 3/8"
Ⓑ Overall width of DishDrawer™	23 9/16"
Ⓒ Overall depth of DishDrawer™	22 9/16"
Ⓓ Depth of chassis	21 3/4"
Ⓔ Depth of front panel	13/16"
Ⓕ Height of chassis	33 11/16"
Ⓖ Height of drawer fronts	29 3/4"
Ⓗ Height of upper front panel	17 3/16"
Ⓘ Height of lower front panel	12 1/4"
Ⓢ Height from floor to bottom of lower front panel	3 15/16" - 6 5/16"
Ⓣ Height from top of front panel to top of chassis	5/16"
Ⓤ Ventilation gaps between panels	1/4"
Ⓦ Height of toe kick panel	2 13/16" - 5"
Ⓧ Depth of toe kick recess	1 1/2" - 4"
Ⓨ Height of adjustable levelling feet	3/8" - 2 11/16"
Ⓩ Maximum extension of drawer from front datum	21 9/16"

* includes mounted feet

Minimum Clearances	in
Height of cavity	min 34"
Width of cavity	23 5/8"
Depth of cavity	min 22 1/16"
Minimum clearance from a corner cupboard	1/2"

Note: Service outlet at rear extends both sides, hoses and cords can be routed to either or both.


INDICATES CABINETRY / PRODUCT DATUM -----
INDICATES CABINETRY CLEARANCES -----

DATE: **07.09.2016**

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit www.fisherpaykel.com

Fisher & Paykel

DATA SHEET

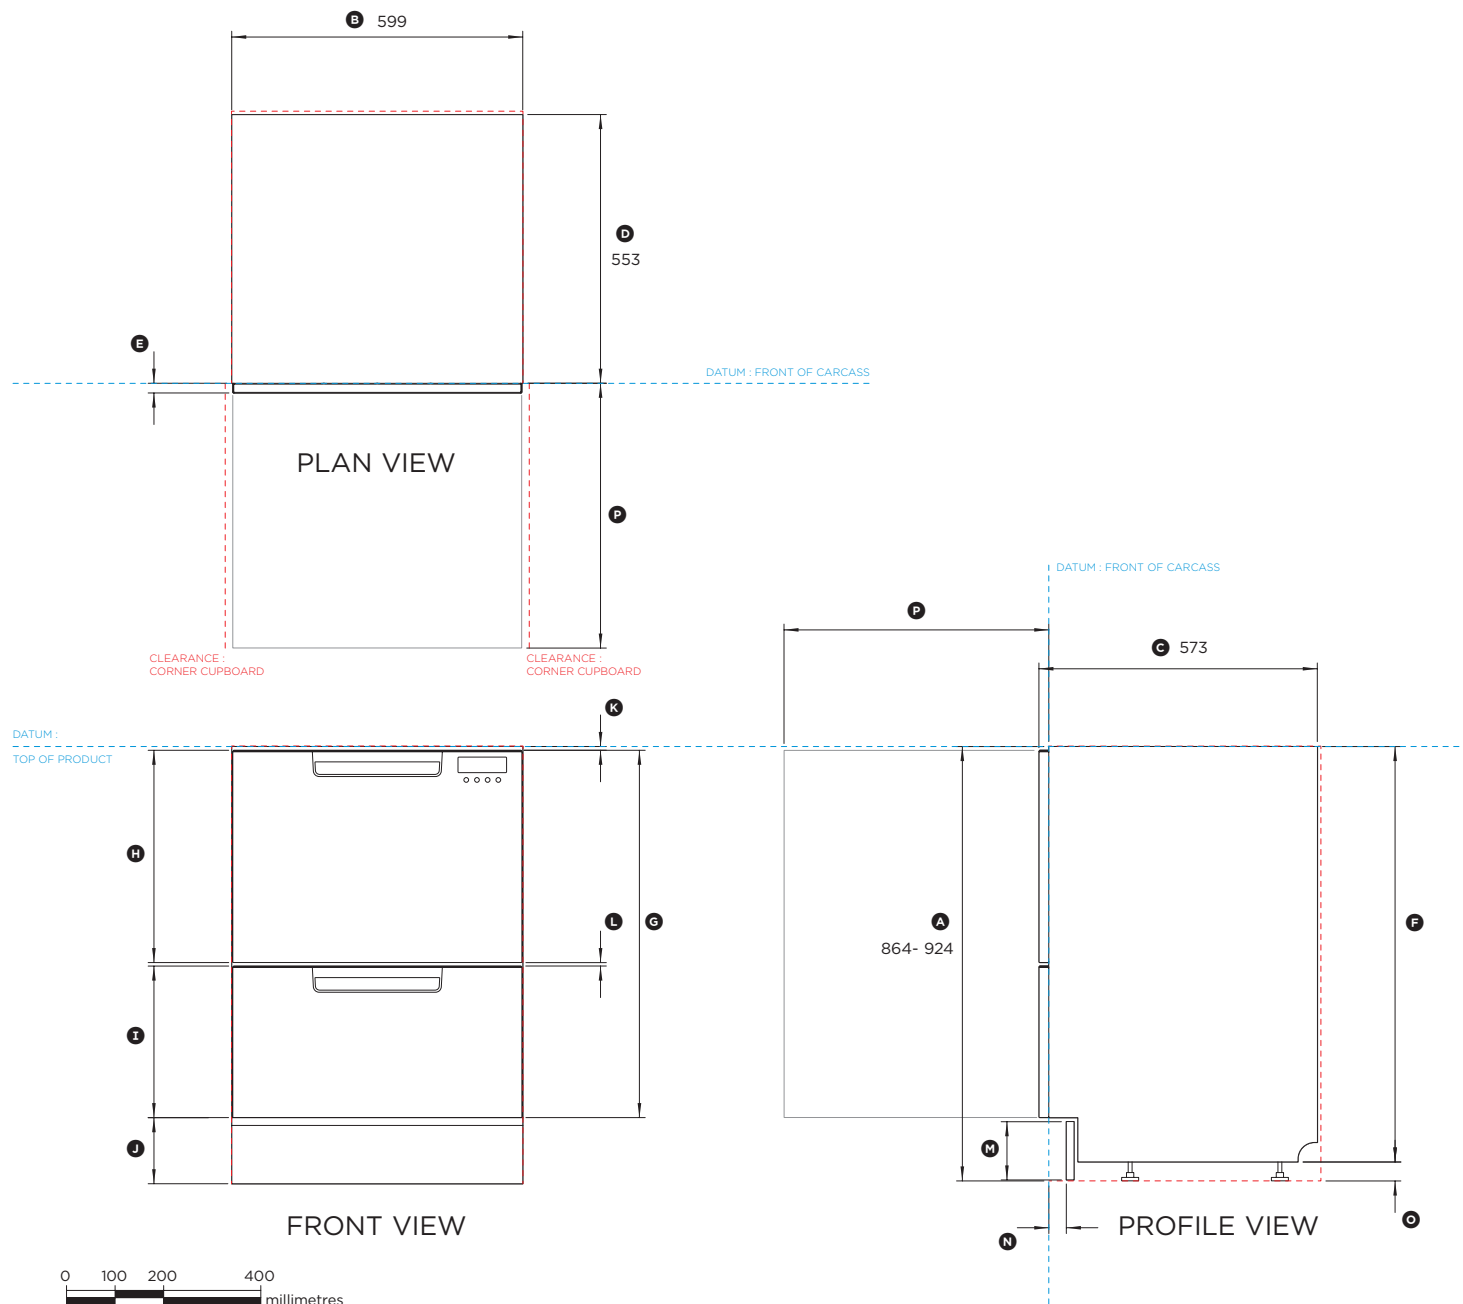

24" DOUBLE DISHDRAWER™ TALL

Model no:

DD24DCTX9, DD24DCTHX9

(refer page 1 for imperial measurements)

Dimensions	mm
(A) Overall height* of DishDrawer™	864 - 924
(B) Overall width of DishDrawer™	599
(C) Overall depth of DishDrawer™	573
(D) Depth of chassis	553
(E) Depth of front panel	20
(F) Height of chassis	855
(G) Height of drawer fronts	756
(H) Height of upper front panel	437
(I) Height of lower front panel	312
(J) Height from floor to bottom of lower front panel	100 - 160
(K) Height from top of front panel to top of chassis	8
(L) Ventilation gaps between panels	7
(M) Height of toekick panel	72 - 127
(N) Depth of toekick recess	38 - 102
(O) Height of adjustable levelling feet	9 - 69
(P) Maximum extension of drawer from front datum	547

* includes mounted feet

Minimum Clearances	mm
Height of cavity	min 864
Width of cavity	600
Depth of cavity	min 560
Minimum clearance from a corner cupboard	13

Note: Service outlet at rear extends both sides, hoses and cords can be routed to either or both.

INDICATES CABINETRY / PRODUCT DATUM -----

DATE: 07.09.2016

IMPORTANT NOTE: Throughout this guide, dimensions may vary by $\pm 2\text{mm}$ (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit www.fisherpayne.com

Fisher & Paykel