


ABOD6LHD

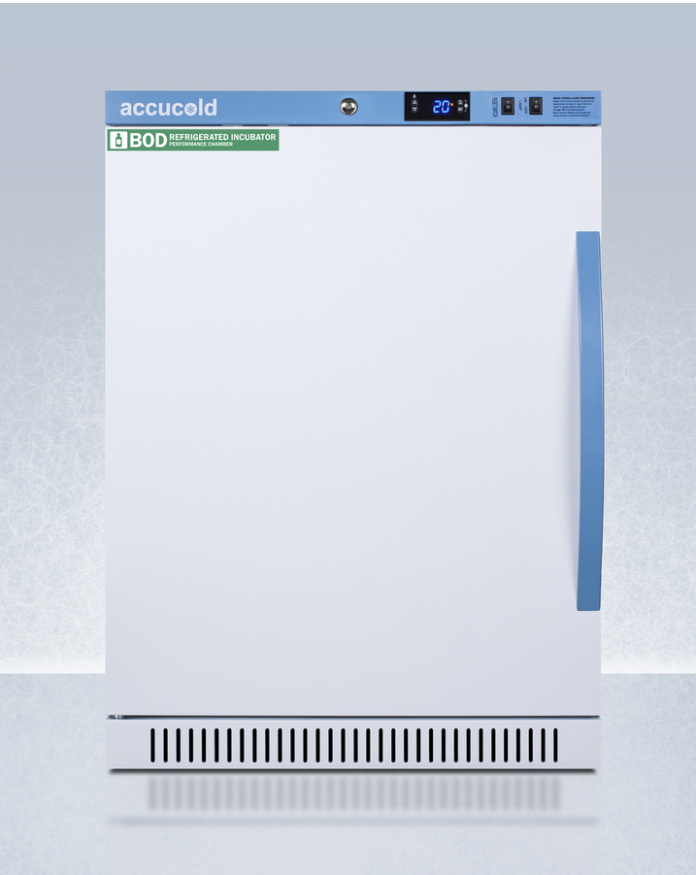

32.5" x 23.38" x 24.38" (H x W x D)

Performance Series BOD refrigerated incubator with 6 cu.ft. capacity

Highlights:

BOD refrigerated/heated incubator for water treatment storage

Intelligent microprocessor digital temperature controller

Improved temperature accuracy with a separate temperature probe for continuous product readout to simulate stored product temperature

Product Features:

| | |
|--|--|
| BOD Refrigerated/Heated Incubator | Designed to store water samples under reliable temperature conditions for optimum research results |
| Purpose-built design | Constructed and featured for the storage of water samples |
| Pre-set to 20°C | Ideal temperature for bottle incubation |
| +/-1°C Variation | The published temperature variation is derived from the maximum deviation of an NTC sensor in a 1 oz. vial located nearest the chamber geometric center during a 24 hour test period |
| Large capacity | 6 cu.ft. interior can hold up to 90 300ml incubator glass bottles (note: bottle capacity varies by exact bottle design and size) |
| Antimicrobial silver ion-coated handle | Powder-coated handle with naturally occurring silver ions to help reduce the spread of germs |
| Adjustable temperature | Intuitive controls let you adjust the interior temperature between +4 to +60°C |
| Temperature alarm | Visual and audible alarms alert if the interior temperature rises or falls out of set range |
| Remote alarm contacts | Electronic controller is equipped with a volt-free contact for alarm forwarding to an external remote system (contacts located in the external rear of the unit) |

ABOD6LHD Specifications:

| Overview | |
|----------------------------|---------------------------|
| Nominal Height | 33.0" (84 cm) |
| Height of Cabinet | 32.5" (83 cm) |
| Nominal Width | 24.0" (61 cm) |
| Width | 23.38" (59 cm) |
| Width with Door Open | 23.88" (61 cm) |
| Nominal Depth | 25.0" (64 cm) |
| Depth | 24.38" (62 cm) |
| Depth with Handle | 26.13" (66 cm) |
| Depth with door at 90° | 46.5" (118 cm) |
| Capacity | 6.0 cu.ft. (170 L) |
| Defrost Type | Automatic |
| Door | White |
| Cabinet | White |
| US Electrical Safety | ETL |
| Canadian Electrical Safety | ETL-C |
| Amps | 0.75 |
| Voltage/Frequency | 115 V AC/60 Hz |
| Weight | 115.0 lbs. (52 kg) |
| Parts & Labor Warranty | 2 Years |
| Compressor Warranty | 5 Years |
| UPC | 761101155142 |
| Refrigerator Features | |
| Door Swing | LHD |
| Reversible | No |
| Shelf Type | Wire |
| Shelf Qty | 4 |
| Adjustable Shelves | Yes |
| Thermostat Type | Digital |
| Fan Type | Interior |
| Refrigerant Type | R600a |
| Refrigerant Amount | 1.66oz. |
| Interior Light | Yes |
| Temperature Range | 4 to 60°C (39.2 to 140°F) |
| Sound Level | 40.7 dB |

| Dimensions | |
|------------------------|---------------|
| Interior Height | 24.5" (62 cm) |
| Interior Width | 20.0" (51 cm) |
| Interior Depth | 17.0" (43 cm) |
| Compressor Step Height | 6.5" (17 cm) |
| Compressor Step Width | 20.0" (51 cm) |
| Compressor Step Depth | 5.0" (13 cm) |

