6.9 cu. ft. Gas **Double Oven Range**

- ProBake Convection® with Air Fry
- Air Sous Vide
- InstaView® Window
- Double Oven
- EasyClean® + Self Clean
- 20,000 BTU UltraHeat Burner
- SmoothTouch® Glass Controls
- 6.9 cu. ft. Large Capacity
- ENERGY STAR® Certified
- SmartDiagnosis™
- LG ThinQ® Technology (Wi-Fi)







COI	LOR AVAIL	ABILLIA
	1 DC1 6024	C +=:=1

Automatic Safety Shut-Off

COOKTOP FEATURES

Cooktop Type

Number of Burners

LDGL6924S – Stainless Steel			
CAPACITY			
Oven Capacity	6.9		
Upper Oven Capacity	2.6		
Lower Oven Capacity	4.3		
OVEN FEATURES			
Convection System	ProBake® Convection (Lower Oven Only)		
Oven Cooking Modes	Upper: Bake, Broil, Warm, Keep Warm, Pizza, EasyClean®, Self Clean, Remote Start, Delayed Timed Cook, Timed Cook Lower: Bake, Convection Bake, Convection Roast, Proof, Warm, Keep Warm, Frozen meal, Air Sous-vide, Air Fry, EasyClean®, Self Clean, Delayed Timed Cook, Timed Cook		
Air Sous Vide	Yes		
Built-in Air Fry	Yes		
Temperature Probe	No		
Oven Racks	2 Standard, 1 Offset		
Number of Rack Positions	Upper: 2; Lower: 4		
Broil Element (BTU, NG / LP)	Upper: 14,500 / 12,500		
Convection (BTU, NG / LP)	Lower: 14,000 / 12,000		
Bake Element (BTU, NG / LP)	Upper: 14,500 / 12,500		
Convection Conversion	Yes (Lower Oven Only)		
EasyClean®	Yes		
Self Clean	Yes		
GoCook Smart Oven Light	Yes (2)		
Door Lock	Yes		

After 12 Hours

Sealed Gas Burners

Burner BTU (NG / LP)		
Left Front	17,000 / 12,000 (SuperBoil)	
Left Rear	9,100 / 7,500	
Center	10,000 / 10,000 (Oval)	
Right Front	20,000 / 12,500 (UltraHeat)	
Right Rear	5,000 / 4,000	
Cooktop Burner Grate Material	Cast Iron	
Continuous Grates	Yes	
CONTROLS		
Cooktop Control Type	Front Tilt-Control Knobs (Weighted)	
Oven Control Type	SmoothTouch® Glass Controls	
Display	LED Display	
Language	English	
Kitchen Timer	Yes	
Timed Cook	Yes	
Clock	12 Hr or 24 Hr (Option)	
Temperature Unit of Measure	°F or °C	
Cooking Complete Reminder Volume	High, Low, Off	
Oven Control Lock	Yes	
CONVENIENCE		
ADA Compliant	No	
Sabbath Mode	No	
SMART FEATURES		
Wi-Fi Enabled	Yes	
ThinQ® Technology	Yes	
ThinQ UP™	Yes	
ThinQ Care [™]	Yes	
Remote Monitoring	Yes	
Voice Control	Amazon Alexa, Google Assistant	
SmartDiagnosis™	Yes	
3rd Party Recipe App	Yes (SideChef)	
Scan to Cook (LG ThinQ)	Yes	
Hood / OTR / Cooktop Sync	Yes	

FINISHES AND APPEARANCE		
Fingerprint & Smudge Resistant Exterior	No	
Cooktop Finish	Black Porcelain Enamel	
Handle / Knobs	Stainless Steel Appearance	
Oven Door Feature	InstaView [®] Window (WideView [™])	
TECHNICAL SPECS		
Fuel Type	NG / LP	
Required Power Supply	120V, 60Hz	
Minimum Circuit Rating	15 Amp	
Power Cord Type	3-Prong, Attached to Unit	
Power Outlet Location	See Installation Diagram	
Gas Supply Location	See Installation Diagram	

INCLUDED ACCESSORIES		
1 Offset Rack, 2 Standard Racks, LP Conversion Kit		
OPTIONAL ACCESSORIES		
Air Fry Tray	LRAL303S	
DIMENSIONS / CLEARANCES / WEIGHTS		
Product Dimensions (W x H x D w/Handle)	29 15 / _{16} " x 46 15 / _{32} " x 29 1 / _{4} "	
Product Height to Cooking Surface	36"	
Cutout Dimensions (W x H x D)	30" x 36" x 25"	
Carton Dimensions (W x H x D)	32 1 / 2 " x 51" x 30 1 / 2 "	
Approx. Weight (Product / Carton)	198.9 lbs. / 245.2 lbs.	
LIMITED WARRANTY		
Parts and Labor	1 Year	

DIMENSIONS / CLEARANCES

Provide proper clearance between the range and adjacent combustible surfaces. These dimensions must be met for safe use of your range. The location of the electrical outlet and pipe opening may be adjusted to meet specific requirements. The range may be placed with 0"clearance (flush) at the back wall.


GAS PIPE AND ELECTRICAL OUTLET LOCATIONS

30" (76.2 cm)


ፍ


7 14/16"

(20 cm)

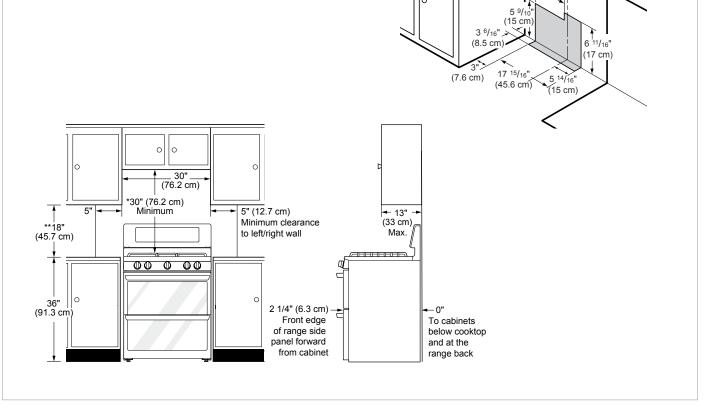

DIMENSIONS / CLEARANCES





DIMENSIONS / CLEARANCES			
Α	Width	29 15 / 16 " (760.8 mm)	
В	Height	46 15 / 32 " (1180.1 mm)	
С	Depth (Includes Door Handle)	29 1/₄ " (743.1 mm)	
D	Height to cooking surface (Excludes Vent Trim)	36" (914 mm)	
Е	Depth (Includes only the product body that is loaded into the cabinet. Excludes door, drawer, and handles)	24 3 / 4 " (628.5 mm)	
F	Depth (Excludes Door Handle)	26 27 / 32 " (682.0 mm)	
G	Depth when upper door is fully opened	38 5 / 8 " (981.2 mm)	
Н	Depth when lower door is fully opened	42 3 / _{16} " (1072.2 mm)	