FRIGIDAIRE

GALLERY



30" Electric Range with Stone-Baked Pizza

Electric Range

Available Products: GCFE3070BF

Available Colors: Stainless Steel

Version: 11/25

Product Specifications

Cooking Controls		Cooking Controls Function	
Air Fry	Yes	Change between Continuous Bake Setting or 12-Ho	ur Yes
Air Sous Vide	Yes	Energy Saving Feature	
Bake	Yes	Delayed Bake	Yes
Bake Time	Yes	Program Fahrenheit or Celsius	Yes
Bread Proof	Yes	Silent Control Panel	Yes
Broil	Yes		
Clock	Yes	Cooktop	
Convection Bake	Yes	Cooking Surface Type	Smooth
Convection Convert	Yes	Element On Indicator Light	Yes
Convection Roast	Yes	Hot-Surface Indicator Light	Yes
Cook Time	Yes		
Cooktop Lockout	Yes	Drawer	
Dehydrate	Yes	Drawer Handle Style	Integrated
Delay Clean	Yes	Drawer Type	Storage
Delay Start	Yes		0.01490
Door Lock	Yes	Controls	
Hot Surface	Yes	Control Lock	Yes
Keep Warm	Yes	Sabbath Mode	Yes
Kitchen Timer	Yes	Sabbatii Mode	165
Light	Yes	Dimensions and Volume	
Lockout	Yes		25.2/01
Multi-Rack Cooking	Yes	Minimum Height	35 3/8"
My Favorite	Yes	Maximum Height	36 3/8"
No Preheat	Yes	Width	30" 26"
Off	Yes	Depth	
On / Off (for each element)	Yes	Depth With Door 90° Open	47 5/16"
Oven Indicator Light	Yes	Depth With Handle	28 1/2"
Oven Light	Yes	Oven Interior Height	21 1/4"
Oven Lock	Yes	Oven Interior Width	25 3/16"
Preheat	Yes	Oven Interior Depth	19 7/8"
Probe	Yes	Oven Capacity	6.2 Cu. Ft.
Self Clean	Yes		
Set Clock	Yes	Installation	
Slow Cook	Yes	Adjustable Leveling Legs	Yes
Start	Yes		
Start Time	Yes	Certifications and Approvals	
Steam Bake	Yes	ADA Compliant	Yes
Steam Clean	Yes	Star-K Certification	Yes
Steam Roast	Yes		
Stone-Baked Pizza	Yes		
Temperature Display	Yes		
The Control of the Co	7.7		

Yes

Timer On / Off

User Preferences

5486

Available Products: GCFE3070BF

Available Colors: Stainless Steel

Version: 11/25

Oven

Bake Element	2500 Watts
Bake Element Pass	8
Bake Element Type	Hidden
Broil Element	4000 Watts
Broil Element Pass	6
Cleaning System	Yes
Convection	Yes
Convection Element	3800 Watts
Convection Type	Total
Number of Convection Fans	1
Number of Rack Positions	8
Oven Interior Color	Midnight Black
Oven Light Quantity	2
Oven Light Type	Halogen
Oven Light Watts	40 Watts
Rack Position Type	Embossed
Rack Type 1	Flat
Rack Type 1 Quantity	2

Cooktop Performance

Right Front Element Burner Size	9"
Right Rear Element Burner Size	6"
Left Front Element Burner Size (Small)	6"
Left Front Element Burner Size (Large)	9"
Left Rear Element Burner Size	6"
Right Front Element Burner	3200 Watts
Right Rear Element Burner	1200 Watts
Left Front Element Burner	3000 Watts
Left Rear Element Burner	1200 Watts
Center Rear Element Burner	100 Watts
Keep Warm Burner Location	Center Rear

Included Pizza Accessories

Pizza Stone	Yes
Pizza Shield	Yes
Peel	Yes

Display

Control Location	Front	
Display Interface Color	White	
Display Type	Capacitive Touch	

Electrical Specifications

Connected Load @ 240V	13 kW
Minimum Circuit Required	40 Amps
Voltage Rating	240 V

General Specifications

Frigidaire Fit Promise	Yes
Prop 65 Label	Yes
Warranty - Labor	1 Year
Warranty - Parts	1 Year

Safety Certifications and Approvals


RoHS	Yes
UL Listed	Yes

Available Colors: Stainless Steel

Available Products: GCFE3070BF

Version: 11/25

Installation Diagram

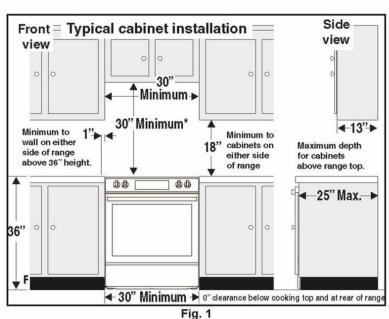




Fig. 2

*30" (762 mm) MINIMUM CLEARANCE BETWEEN THE TOP OF THE COOKING SURFACE AND THE BOTTOM OF AN UNPROTECTED WOOD OR METAL CABINET; OR 24" (610 mm) MINIMUM WHEN BOTTOM OF WOOD OR METAL CABINET IS PROTECTED BY NOT LESS THAN 1/4" (6 mm) FLAME RETARDANT MILLBOARD COVERED WITH NOT LESS THAN NO. 28 MSG SHEET STEEL, 0.015" (0.4 mm) STAINLESS STEEL, 0.024" (0.6 mm) ALUMINUM OR 0.020" (0.5 mm) COPPER. 0" (0 mm) CLEARANCE IS THE MINIMUM FOR THE REAR OF THE RANGE. FOLLOW ALL DIMENSION REQUIREMENTS PROVIDED ABOVE TO PREVENT PROPERTY DAMAGE, POTENTIAL FIRE HAZARD, AND

TO ELIMINATE THE RISK OF BURNS OR FIRE BY REACHING OVER HEATED SURFACE UNITS, CABINET STORAGE SPACE LOCATED ABOVE THE SURFACE UNITS SHOULD BE AVOIDED. IF CABINET STORAGE IS TO BE PROVIDED, THE RISK CAN BE REDUCED BY INSTALLING A RANGE HOOD THAT PROJECTS HORIZONTALLY A MINIMUM OF 5" (127 mm) BEYOND THE BOTTOM OF THE CABINETS.

INCORRECT COUNTERTOP AND CABINET CUTS.




Fig. 3