

# 30" (76.2 cm) and 36" (91.4 cm) Range Hood

## PRODUCT MODEL NUMBERS


WVU37UC0F

WVU37UC6F

## ELECTRICAL REQUIREMENTS


- A 120-volt, 60 Hz., AC-only, 15-amp, fused electrical circuit is required.

## PRODUCT DIMENSIONS

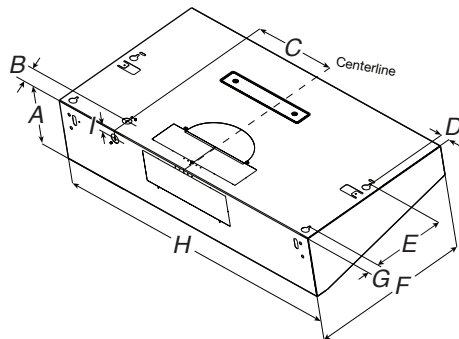

- A.  $6\frac{19}{64}$ " (16 cm)
- B. 2" (5 cm)
- C.  $8\frac{25}{64}$ " (21.3 cm)
- D. 1" (2.54 cm)
- E.  $8\frac{32}{32}$ " (22.8 cm)
- F.  $19\frac{11}{16}$ " (50 cm)
- G.  $1\frac{1}{2}$ " (3.8 cm)
- H. 36" (91.4 cm) for 36" (91.4 cm) models  
30" (76.2 cm) for 30" (76.2 cm) models
- I.  $5\frac{5}{64}$ " (2.2 cm)

## INSTALLATION CLEARANCES

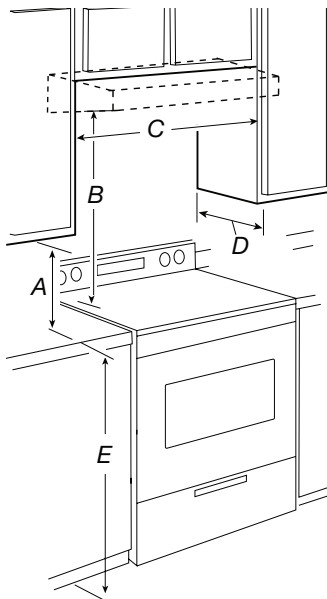

- A. 18" (45.7 cm) min. clearance - upper cabinet to countertop
- B. 24" (61.0 cm) minimum - bottom of range hood to cooking surface
- C. 30" (76.2 cm) min. cabinet opening width for 30" (76.2 cm) models  
36" (91.4 cm) min. cabinet opening width for 36" (91.4 cm) models
- D. 12" (30.5 cm) minimum cabinet depth
- E. 36" (91.4 cm) base cabinet height

## VENTING REQUIREMENTS

- This range hood is factory set to exhaust the air to the outside through the wall or the roof. A non-vented (recirculating) installation will require a Charcoal Filter Kit. See the "Accessories" section for ordering information.
- Vent system must terminate to the outdoors, except for nonvented (recirculating) installations.
- Do not terminate the vent system in an attic or other enclosed area.
- Do not use a 4" (10.2 cm) laundry-type wall cap.
- Use a 7" (17.8 cm) round metal vent or a  $3\frac{1}{4}$ " x 10" (8.3 cm x 25.4 cm) rectangular metal vent, depending on your installation requirements. Rigid metal vent is recommended. Plastic or metal foil vent is not recommended.
- The length of vent system and number of elbows should be kept to a minimum to provide efficient performance.


### For the most efficient and quiet operation:

- Use no more than three 90° elbows.
- Make sure there is a minimum of 24" (61 cm) of straight vent between the elbows if more than 1 elbow is used.
- Do not install 2 elbows together.
- Use clamps or duct tape to seal all joints in the vent system.
- The vent system must have a damper. If roof or wall cap has a damper, do not use damper supplied with the range hood.
- Use caulking to seal exterior wall or roof opening around the cap.

## VENTING METHODS

Vent system can terminate either through the roof or wall. Use  $3\frac{1}{4}$ " x 10" (8.3 cm x 25.4 cm) rectangular with a maximum vent length of 35 ft (10.7 m) or 7" (17.8 cm) or larger round vent with a maximum length of 50 ft (15.2 m) for vent system.

**NOTE:** Flexible vent is not recommended. Flexible vent creates both back pressure and air turbulence that greatly reduce performance.


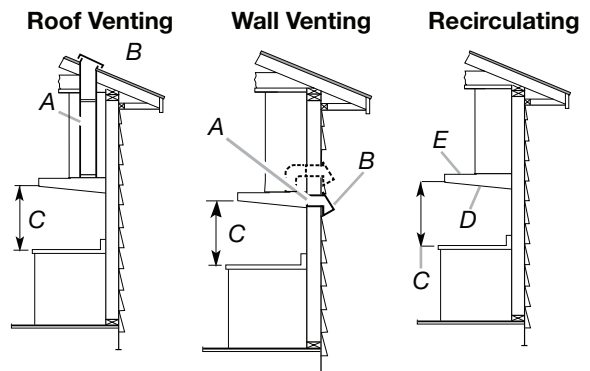


- A. 7" (17.8 cm) round vent through roof or  $3\frac{1}{4}$ " x 10" (8.3 cm x 25.4 cm) rectangular vent through the roof or wall (purchased separately)
- B. Roof/Wall cap with damper (purchased separately)
- C. 24" (61.0 cm) min. above the cooking surface
- D. Charcoal Filter Kit (purchased separately)
- E. Recirculating grid


## CALCULATING VENT SYSTEM LENGTH

To calculate the length of the system you need, add the equivalent feet (meters) for each vent piece used in the system.

### 7" (17.8 cm) Round Vent System

| Vent Piece                                                | Round             |                                                                                   |
|-----------------------------------------------------------|-------------------|-----------------------------------------------------------------------------------|
| 45° elbow                                                 | 2.5 ft<br>(0.8 m) |  |
| 90° elbow                                                 | 5.0 ft<br>(1.5 m) |  |
| 7" (17.8 cm) wall cap                                     | 0.0 ft<br>(0.0 m) |  |
| 3 1/4" x 10" (8.3 cm x 25.4 cm) to 7" (17.8 cm)           | 4.5 ft<br>(1.4 m) |  |
| 3 1/4" x 10" (8.3 cm x 25.4 cm) to 7" (17.8 cm) 90° elbow | 5.0 ft<br>(1.5 m) |  |



### Example vent system

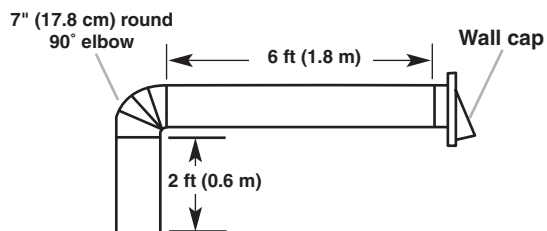


### Maximum Recommended Length = 50 ft (15.2 m)

|                               |                   |
|-------------------------------|-------------------|
| 1 - 90° elbow                 | = 5.0 ft (1.5 m)  |
| 1 - wall cap                  | = 0.0 ft (0.0 m)  |
| 8 ft (2.4 m) straight         | = 8.0 ft (2.4 m)  |
| Length of 7" (17.8 cm) system | = 13.0 ft (3.9 m) |

### 3 1/4" x 10" (8.3 cm x 25.4 cm) Vent System

| Vent Piece                                 |                    |                                                                                     |
|--------------------------------------------|--------------------|-------------------------------------------------------------------------------------|
| 3 1/4" x 10" (8.3 cm x 25.4 cm) 90° elbow  | 5.0 ft<br>(1.5 m)  |  |
| 3 1/4" x 10" (8.3 cm x 25.4 cm) flat elbow | 12.0 ft<br>(3.7 m) |  |
| 3 1/4" x 10" (8.3 cm x 25.4 cm) wall cap   | 0.0 ft<br>(0.0 m)  |  |

### Example vent system

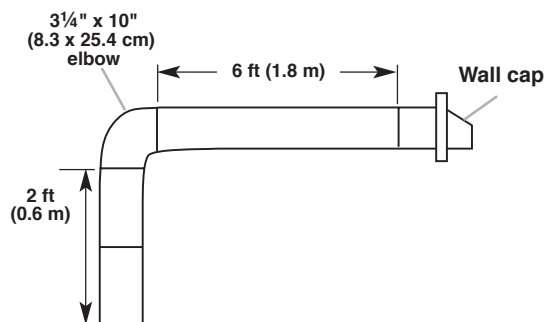

### Maximum Recommended Length = 35 ft (10.7 m)

|                                                  |                   |
|--------------------------------------------------|-------------------|
| 1 - 90° elbow                                    | = 5.0 ft (1.5 m)  |
| 8 ft (2.4 m) straight                            | = 8.0 ft (2.4 m)  |
| 1 - wall cap                                     | = 0.0 ft (0.0 m)  |
| Length of 3 1/4" x 10" (8.3 cm x 25.4 cm) system | = 13.0 ft (3.9 m) |