

**MONOGRAM 36" PROFESSIONAL  
GAS RANGETOP WITH 6 BURNERS**  
ZGU366NTSS (NATURAL GAS)



**BURNER PERFORMANCE**

|                             |            |
|-----------------------------|------------|
| Front Left Burner Element   | 23,000-BTU |
| Back Left Burner Element    | 18,000-BTU |
| Front Middle Burner Element | 15,000-BTU |
| Back Middle Burner Element  | 15,000-BTU |
| Front Right Burner Element  | 23,000-BTU |
| Back Right Burner Element   | 18,000-BTU |

**VERSATILE GAS BURNER CONFIGURATION**

Delivering exceptional cooking flexibility, the two 23,000-BTU multi-ring brass burners and dual-stack burners offer a range of heat settings, from gentle simmer to intense flame

**3-PIECE GRATES WITH REVERSIBLE WOK FEATURE**

Designed to adapt to different cooking styles, these reversible grates are flat on one side and uniquely contoured on the other to perfectly fit round-bottom woks

**RING-LIT KNOBS**

Delivering a modern approach to accent lighting, the rings illuminate to indicate when a burner is in use

**SOLID BRASS BLADES ON PRECISION  
MACHINED KNOBS**

With an unmatched attention to detail, all knobs on the new Monogram Pro ranges and rangetops come with solid brass accents

**SEAMLESS STAINLESS TOP FRAME**

Meticulously crafted from one piece of stainless steel that covers the cooktop and control panel, this seamless and stylish surface is easy to clean and beautiful to look at

**LP CONVERSION KIT INCLUDED**

Designed to deliver a seamless conversion experience, this self-contained kit includes everything needed to convert a rangetop to liquid propane



### SPECIFICATIONS



|                         |                   |
|-------------------------|-------------------|
| Overall Width           | 35 7/8" (91.1 cm) |
| Overall Depth           | 27 1/2" (69.8 cm) |
| Overall Height          | 8 1/2" (21.6 cm)  |
| Volts/Hertz/Amps        | 120v; 60Hz; 15A   |
| Net Weight              | 135 lbs (61.2 kg) |
| Approx. Shipping Weight | 163 lbs (74 kg)   |

### ATTENTION ELECTRICIAN:

Rangetops must be supplied with 120V, 60Hz, and connected to an individual, properly grounded branch circuit protected by a 15 amp circuit breaker or time-delay fuse.

For more details refer to the installation instructions for this product.


### OVERALL DIMENSIONS

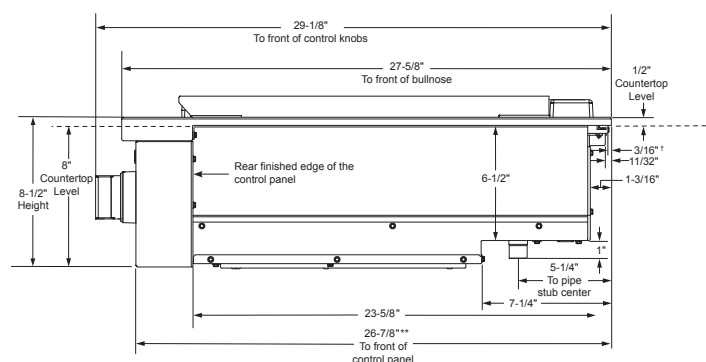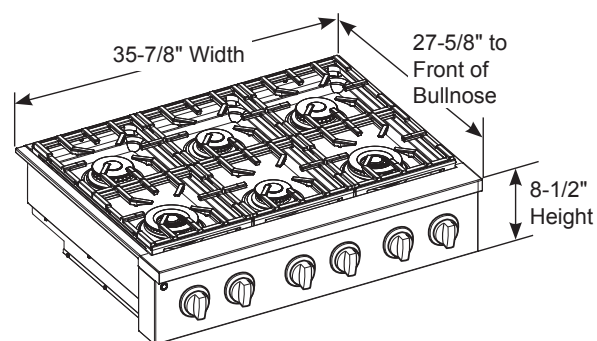


<sup>†</sup> Include the overhang of the rear trim when countertop continues behind the product. The overhang is decorative only. The weight of the rangetop is fully supported by the side trims.  
<sup>\*\*</sup> Maximum countertop cutout depth from the back of the rear trim to the back edge of chamfer at the sides of the control panel - typically, the maximum countertop cutout depth (front to back). Minimum countertop cutout depth is 25-1/4"

Dimensions in parentheses are in centimeters unless otherwise noted.  
 Actual product dimensions may vary due to manufacturing tolerances.

## DIMENSIONS AND INSTALLATION INFORMATION (IN INCHES)

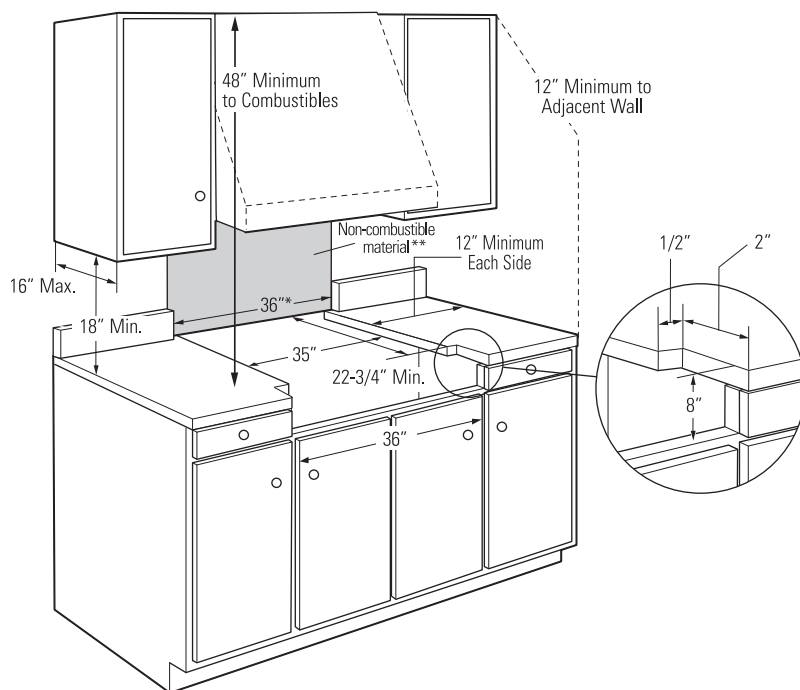

## UTILITY LOCATIONS

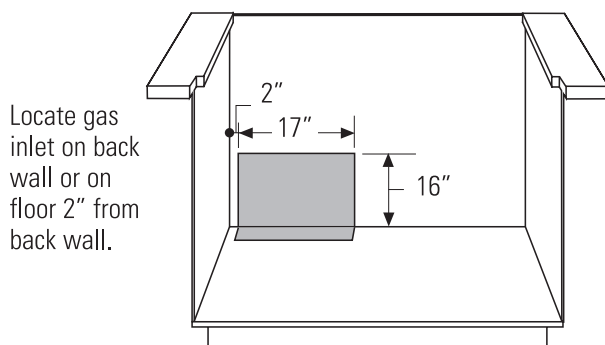

Locate gas inlet on back wall or on floor 2\"/>

## HELPFUL TIPS

### PRODUCT DIMENSIONS AND CLEARANCE

A 36\"/>

Clearances between rangetop and side wall must be at least 12\"/>

Allow 8\"/>

\*The opening between a 4\"/>

\*\*As defined in the National Fuel Gas Code (ANSI Z223.1/CSA B149.1, Current Edition). Clearances from non-combustible materials are not part of the ANSI Z21.1/CSA 1.1 scope and are not certified by CSA. Clearances less than 12\"/>

### GAS PRESSURE REGULATOR

You must use the gas pressure regulator supplied with this rangetop. For proper operations the inlet pressure to the regulator should be as follows:

Natural Gas:

Minimum pressure: 6\"/>

Maximum pressure: 13\"/>

Propane (LP) Gas:

Minimum pressure: 11\"/>



Maximum pressure: 13\"/>

See installation instructions for more details.


### WARNING

Installations without a hood require 48\"/>

## DIMENSIONS AND INSTALLATION INFORMATION (IN INCHES)

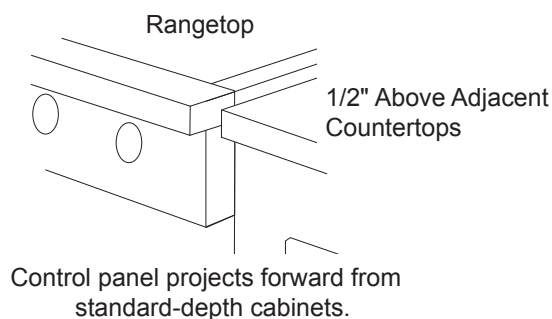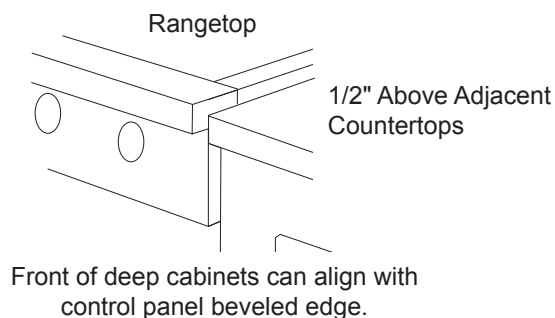

## SIDE VIEW WITH A BACKSPLASH

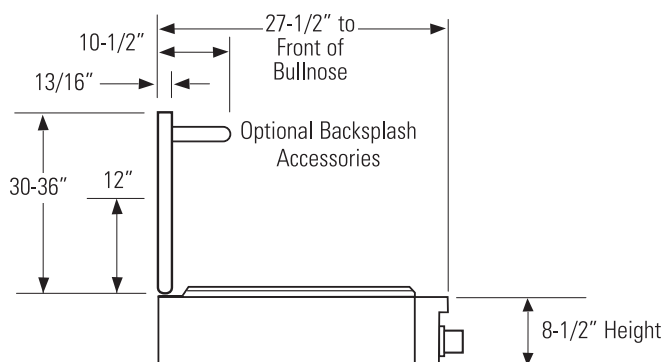

## HELPFUL TIPS

### OPTIONAL BACKSPLASH ACCESSORIES

- The rangetop requires a 12" minimum clearance to a vertical combustible surface at the rear. A backsplash is required for installations with less than 12" clearance. The following backsplash accessories are available, or a custom, non-combustible backsplash can be used.
- Order one with a 36"-wide range backsplash:
  - UX12BS36PSS – 12" height backsplash
  - UXADBS36PSS – 30-36" adjustable-height backsplash with warming shelf