

DLEX5800_ / DLGX5801_



7.4 cu. ft. Ultra Large Capacity Smart Front Load Dryer with AI Sensor Dry & TurboSteam®

- 7.4 cu. ft. Ultra Large Capacity
- Built-In Intelligence: AI Sensor Dry™ / Smart Pairing™
- SteamFresh™ Cycle with TurboSteam™ Technology
- Pet Care Cycle
- FlowSense® Duct Clogging & Lint Filter Indicators

KEY FEATURES

AVAILABLE COLORS

- GRAPHITE STEEL
- ALPINE WHITE



Enjoy new ways to control your home with LG smart appliances

- Use the ThinQ® app to start the laundry while you're out
- Get alerts when the cycle is finished
- With Smart Pairing™, the washer can tell the dryer to select a compatible drying cycle




SMART APPLIANCE



PRODUCT FEATURES

SUMMARY		APPEARANCE		MATERIALS	
Type	Front Load Dryer	Control & Display	Electronic Control Panel with LED Display	Aluminized Alloy Steel Drum	Yes
Vent Type	Vented	Dial-A-Cycle®	Yes	NeveRust® Stainless Steel Drum	No
Dryer Type	Elec: DLEX5800V / DLEX5800A Gas: DLGX5501A/ DLGX5501A	Touch Buttons	Yes	Cabinet	Painted Steel
Capacity	7.4 cu. ft.	FABRIC CARE FEATURES		Door	Tempered Glass Door
Matching Washer	WM5800HVA, WM5800HAA	AI Sensor Dry	Yes	All Available Colors	Graphite Steel (V) Alpine White (A)
Sensor Dry	Yes	Sensor Dry	Yes	POWER SOURCE	
Steam	Yes	Precise Temperature Control with Variable Heater	Yes	Ratings	CSA Listed
Available Color	Graphite Steel (V) Alpine White (A)	Steam	TurboSteam®	Electrical Requirements	Elec: 120/240V, 60Hz, 26A (120/208V, 60Hz, 23A) Gas: 120V, 60Hz, 11.5A
DRYER PROGRAMS		CONVENIENCE FEATURES		Type	Electric, Gas
No. of Programs	26	3 Minute Installation Check	Yes	Plug	Elec: Not Included Gas: Included
	Normal, AI Dry, Bedding, Delicates, Quick Dry, Timed Dry, Perm. Press, SteamFresh™, Heavy Duty, Towels, Air Dry, Pet Care, SteamSanitary™, Power Dry Low Temp Dry, Super Dry Activewear, Jeans, Blanket Refresh, Easy Ironing, Small Load, Large Load, XL Load, Wrinkle Prevention, Overnight Dry, Rack Dry	End of Cycle Signal	Yes	Plug Type	Elec: 4-Wire or 3-Wire (Home Built after 1996 require 4-wire) Gas: 3 Prong
		Drum Light (Door Open)	Yes	OPTIONS	
		Reversible Door	Yes	Side Venting Kit	383EEL9001B
		FlowSense® Duct Clogging Indicator	Yes	Drying Rack	3750EL1001A
		Wrinkle Care Option	Yes	Pedestal	WDP6V, WDP6A
		Control Lock	Yes	Pedestal (WxHxD)	27" x 13 5/8" x 28" (43 7/8" D with door open)
		Venting Option	Elec: 4 Way Venting Gas: 3 Way Venting	LIMITED WARRANTY	
No. of Options	11	4 Adjustable Legs	Yes	Parts & Labor	1 Year
	Energy Saver, Remote Start, Wrinkle Care, Steam, Low Static, Damp Signal Drum Light, Wi-Fi, Signal, "More Cycles" Edit, Smart Diagnosis,	Remaining Time Display / Status Indicator(s)	Yes	Drum	3 Years
		SMART FEATURES (ThinQ® TECHNOLOGY)		UPC CODES	
Temperature Setting	High, Med High, Medium, Med Low, Low	Smart Diagnosis (v3.0)	Yes	DLEX5800V	048231349802
Drying Levels	Very Dry, More Dry, Normal Dry, Less Dry, Damp Dry	WiFi	Yes	DLEX5800A	195174126370
Dry Mode	No	NFC Tag On Technology	No	DLGX5801V	048231349819
Manual Dry Times	10min - 100min (5 min Incremental)	ThinQ Care	Yes	DLGX5801A	195174129708
		Remote Start/Cycle Monitor	Yes		
		Energy Monitoring	Yes		
		ENERGY			
		ENERGY STAR® Certified	Yes		
		CEF	3.94		

DIMENSION / CLEARANCES

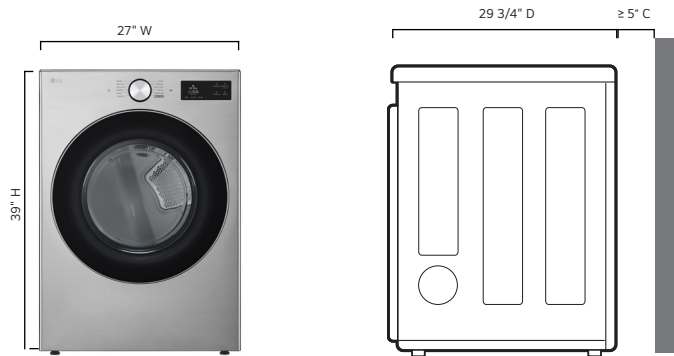

DIMENSIONS	
Product (WxHxD)	27" x 39" x 29 3/4"
Depth with Door Open	51 3/8" D
Carton Dimensions (WxHxD)	29" x 43 1/4" x 31 1/8"
Product Weight (lbs.)	Electric: 120.5/ Gas: 125.1
Carton Weight (lbs.)	Electric: 127.1 / Gas: 133.1

DIMENSION / CLEARANCES


CLOSET VENTILATION REQUIREMENTS

Closets with doors must have both an upper and lower vent to prevent heat and moisture buildup in the closet. One upper vent opening with a minimum opening of 48 sq. in. (310 cm2) must be installed no lower than 6 feet above the floor. One lower vent opening with a minimum opening of 24 sq. in. (155 cm2) must be installed no more than one foot above the floor. Install vent grilles in the door or cut down the door at the top and bottom to form openings. Louvered doors with equivalent ventilation openings are also acceptable.

DIMENSION / CLEARANCES

INSTALLATION SPACING FOR CABINET AND CLEARANCES WITH OPTIONAL PEDESTAL BASE

For cabinet installation with a door, minimum ventilation openings in the top of the cabinet are required.

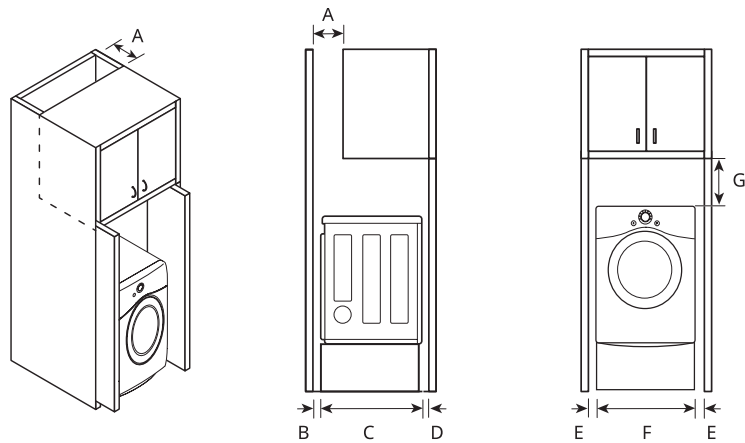


DIMENSIONS	
A Depth of Ventilation Opening	≥ 7" (178mm)
B Back Clearance	≥ 5" (127mm)
C Depth	29 3/4" (756mm)
D Front Clearance	≥ 1" (25 mm)
E Side Clearance	≥ 1" (25 mm)
F Width	27" (686 mm)
G Clearance to Top of Cabinet	≥ 9" (229 mm)

DIMENSION / CLEARANCES

Installation Spacing for Recessed Area or Closet Installation

These clearance are recommended for this dryer.

- Additional clearance should be considered for ease of installation and servicing.
- Additional clearance should be considered on all sides of the dryer to reduce noise transfer.

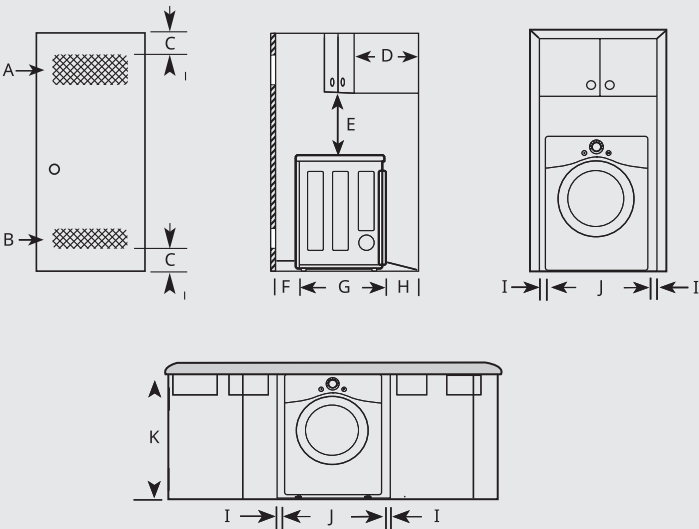

DIMENSIONS	
A Upper Ventilation Opening	≥ 48 sq. in. (310 cm2)
B Lower Ventilation Opening	≥ 24 sq. in. (155 cm2)
C Distance to Ventilation Opening	≥ 3" (76 mm)
D Overhead Cabinet Depth	≤ 14" (356 mm)
E Distance to the Overhead Cabinet / Shelf	≥ 18" (457 mm)
F Front Clearance	1" (25 mm)
G Depth	29 3/4" (756 mm)
H Back Clearance	≥ 5" (127 mm)
I Side Clearance	≥ 1" (25 mm)
J Width	27" (686 mm)
K Height of Cabinet Opening	39" (989 mm)

LEVELING THE APPLIANCE

CHECKING THE LEVEL

Position the appliance in the final location and place a level across the top of the appliance.

- 1 Level
- 2 Level Feet

