



GE APPLIANCES
a Haier company

AIR&WATER
SOLUTIONS

RealMAX Standard Electric Water Heaters

KEY FEATURES

REAL CAPACITY

Get the most from the only water heater that holds a true capacity of hot water compared to electric steel tank water heaters per DOE rated gallon capacity on tall and short models.

MAXIMUM PERFORMANCE

Live comfortably with this best in class water heater that delivers up to 76 gallons of hot water in the first hour of use measured through DOE First Hour Rating.

ANODE ROD

Durable magnesium design offers long-lasting protection against corrosion to extend the life of your water heater tank.

QUICK RECOVERY

Two 5500W heating elements quickly increase hot water.

DRAIN VALVE

Rust-proof brass or glass filled nylon construction can be counted on to provide long-lasting service.

EASY INSTALLATION

Replace your old water heater quickly and easily using standard water and electric connections. Quick electronic connectors are provided with full instructions. T&P relief valve factory installed.

LEADING WARRANTY

RealMAX water heaters carry an 8-year or 10-year tank and parts limited warranty.



Scan here to learn
more about the
full line of water
heater solutions

Visit geappliancesairandwater.com for more details.



SPECIFICATION DETAILS

Model Number	Nominal Capacity (Gallons)	Rated Storage	First Hour Rating (Gallons)	Uniform Energy Factor Min	Recovery @ 90°F Gallon per Hour	Element Wattage	Dimensions in Inches Approx.					Product Weight (lbs) est.	Shipping Weight (lbs) est.
							A	B	C	D	E		
Short Models													
GE30S08BAM*	30	30	53	0.92	25	5,500	40-3/8	31-7/8	22	8	41-7/8	101	111
GE40S08BAM*	40	40	66	0.92	25	5,500	51-3/8	42-7/8	22	8	52-7/8	121	133
GE50S08BAM*	50	50	76	0.93	25	5,500	51-1/2	42-5/8	24	8	53	150	161
Tall Models													
GE30T08BAM*	30	30	54	0.92	25	5,500	49-7/8	41-3/4	20	8	51-3/8	104	113
GE40T08BAM*	40	40	65	0.92	25	5,500	64	56	20	8	65-1/2	127	139
GE50T08BAM*	50	50	76	0.93	25	5,500	62-1/4	53-7/8	22	8	63-3/4	142	154
Lowboy Models Top Part													
GE30L08BAM*	30	26	53	0.93	25	5,500	31-1/4	21-1/4	24	8	32-3/4	105	114
GE40L08BAM*	40	36	61	0.92	25	5,500	32-3/4	22-5/8	27	8	34-1/4	135	145
Lowboy Models Side Part													
GE30L08BSM*	30	26	58	0.93	25	5,500	31-1/4	21-1/4	24	17-5/8	-	105	114
GE40L08BSM*	40	36	63	0.92	25	5,500	32-3/4	22-5/8	27	19	-	135	145



*Change 08 to 10 for 10 year tank and parts warranty.

8-year models feature a glass-filled nylon drain valve.

10-year models feature a brass drain valve.

Water connections are 3/4".

Dimensions and specifications are subject to change without notice.

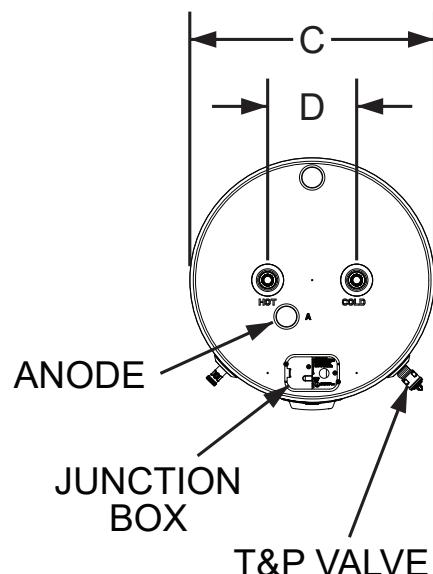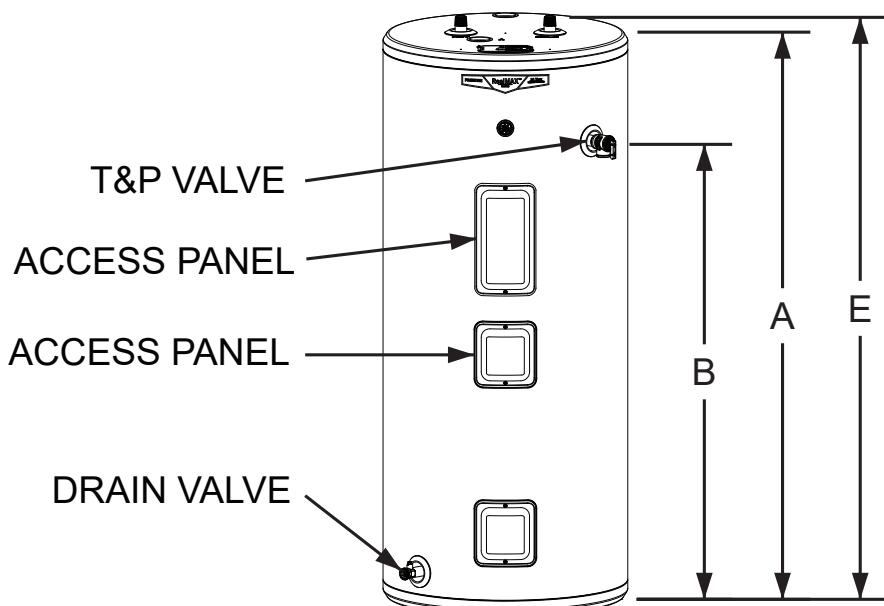

Illustrations are intended for dimensional reference only.
Refer to photograph for actual product appearance

LOCAL INSTALLATION REGULATIONS:

This water heater must be installed in accordance with these instructions, local codes, utility codes, utility company requirements or, in the absence of local codes, the latest edition of the National Electrical Code. It is available from some local libraries or can be purchased from the National Fire Prevention Association, Batterymarch park, Quincy, MA 02169 as booklet ANSI/NFPA 70