

FISHER & PAYKEL

DATA SHEET 24" DOUBLE DISHDRAWER™ DISHWASHER

Model no:

DD24DTX6PX1

(refer page 2 for metric measurements)

Product Dimensions	in
Ⓐ Overall height of product*	34" - 36 3/8"
Ⓑ Overall width of product	23 9/16"
Ⓒ Overall depth of product (excl. handle)	22 9/16"
Ⓓ Depth of chassis	21 3/4"
Ⓔ Depth of drawer front panel	13/16"
Ⓕ Height of chassis	33 11/16"
Ⓖ Height of upper drawer front panel	17 3/8"
Ⓗ Height of lower drawer front panel	12 5/16"
Ⓘ Height from top of drawer panel to top of chassis	1/4"
Ⓢ Ventilation gap between drawer front panels	5/16"
Ⓚ Height from top drawer panel to centre of handle rail	3 3/16"
Ⓛ Handle thickness (not including standoffs)	1"
Ⓜ Handle width (including standoffs)	20 1/4"
Ⓝ Handle depth measured from front of drawer	2 1/4"
Ⓟ Height from top of chassis to bottom of lower drawer panel	30 1/8"
Ⓠ Height of toe kick*	2 5/8" - 4"
Ⓡ Depth of toe kick recess**	2 3/8" - 3 15/16"
Ⓢ Height of feet*	3/8" - 2 3/4"
Ⓣ Height of toe kick space**	3 15/16 - 6 5/16"
Ⓡ Maximum extension of drawer	21 9/16"

*depending on adjustment of levelling feet

**adjustable

Minimum Clearances	in
Minimum inside height of cavity*	34"
Minimum inside width of cavity	23 5/8"
Minimum overall depth of cavity**	22 3/4"
Minimum clearance to adjacent cupboard door	1/16"
Minimum clearance to corner cupboard	1/2"

*depending on adjustment of levelling feet

**including 11/16" (18mm) door panels on adjacent cabinetry




Water pressure	
Water softener models	max. 1 MPa (145 psi), min. 0.1 MPa (14.5 psi)
Non-water softener models	max. 1 MPa (145 psi), min. 0.03 MPa (4.3 psi)
Electrical requirements	110-120 VAC max. 15A

PRODUCT DATUM

INDICATES CABINETRY CLEARANCES

DATE: 31.03.2022

IMPORTANT NOTE: Throughout this guide, dimensions may vary by $\pm 2\text{mm}$ (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

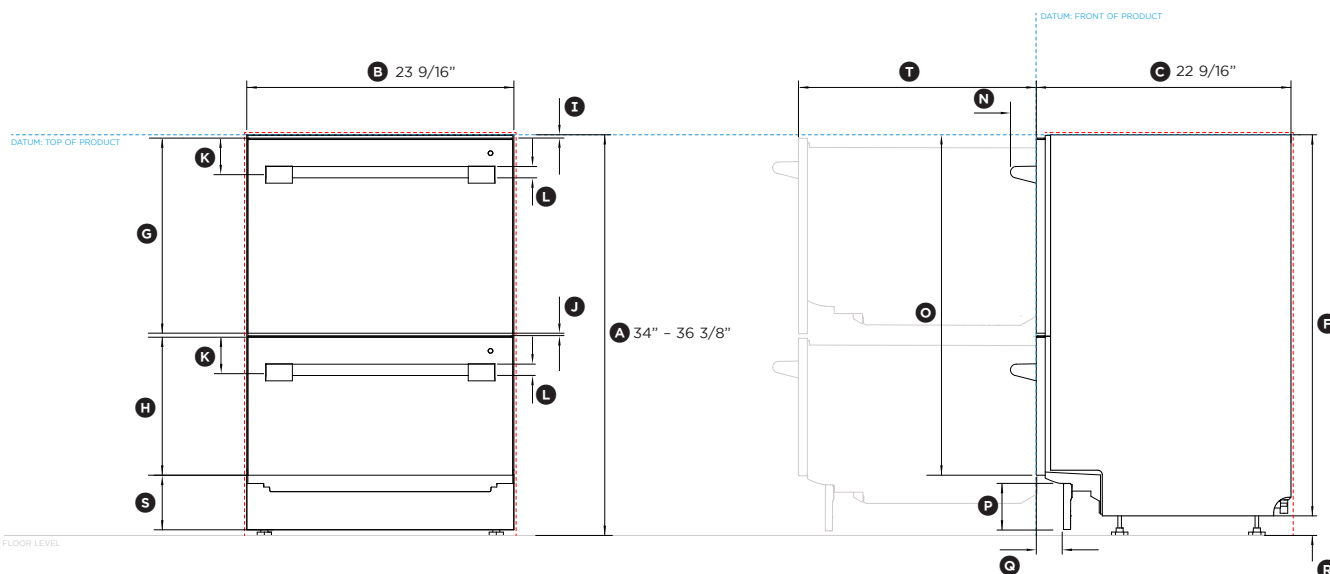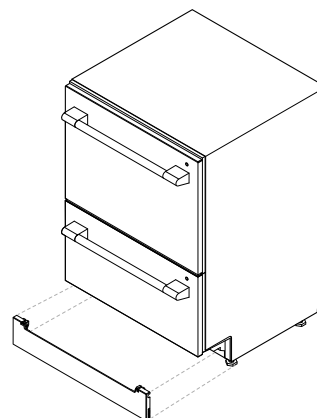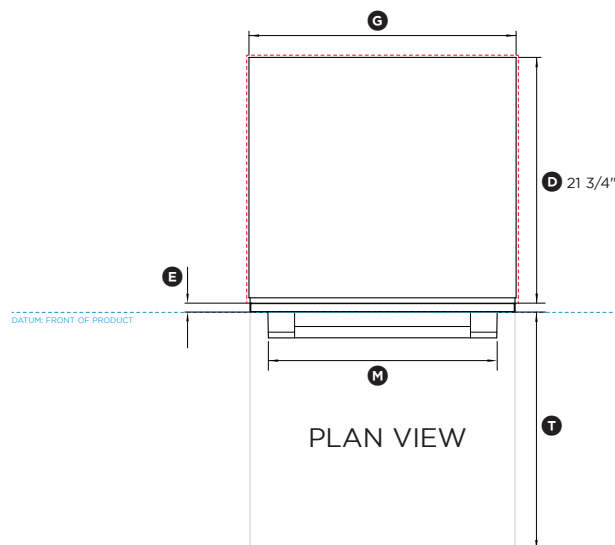

FISHER & PAYKEL

DATA SHEET 24" DOUBLE DISHDRAWER™ DISHWASHER

Model no:
DD24DTX6PX1
(refer page 1 for imperial measurements)

Product Dimensions	mm
Ⓐ Overall height of product*	864 - 924
Ⓑ Overall width of product	599
Ⓒ Overall depth of product (excl. handle)	573
Ⓓ Depth of chassis	553
Ⓔ Depth of drawer front panel	20
Ⓕ Height of chassis	856
Ⓖ Height of upper drawer front panel	442
Ⓗ Height of lower drawer front panel	313
Ⓘ Height from top of drawer panel to top of chassis	7
Ⓢ Ventilation gap between drawer front panels	8
Ⓚ Height from top drawer panel to centre of handle rail	81
Ⓛ Handle thickness (not including standoffs)	25
Ⓜ Handle width (including standoffs)	515
Ⓝ Handle depth measured from front of drawer	58
Ⓟ Height from top of chassis to bottom of lower drawer panel	765
Ⓡ Height of toe kick*	66 - 101
Ⓢ Depth of toe kick recess**	60 - 100
Ⓣ Height of feet*	9 - 69
Ⓤ Height of toe kick space**	100 - 160
Ⓡ Maximum extension of drawer	547

*depending on adjustment of levelling feet
**adjustable

Minimum Clearances	mm
Minimum inside height of cavity*	864
Minimum inside width of cavity	600
Minimum overall depth of cavity**	578
Minimum clearance to adjacent cupboard door	2
Minimum clearance to corner cupboard	13


*depending on adjustment of levelling feet
**including 11/16" (18mm) door panels on adjacent cabinetry

Water pressure	
Water softener models	max. 1 MPa (145 psi), min. 0.1 MPa (14.5 psi)
Non-water softener models	max. 1 MPa (145 psi), min. 0.03 MPa (4.3 psi)
Electrical requirements	110-120 VAC max. 15A

PRODUCT DATUM -----
INDICATES CABINETY CLEARANCES -----

DATE: 31.03.2022

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

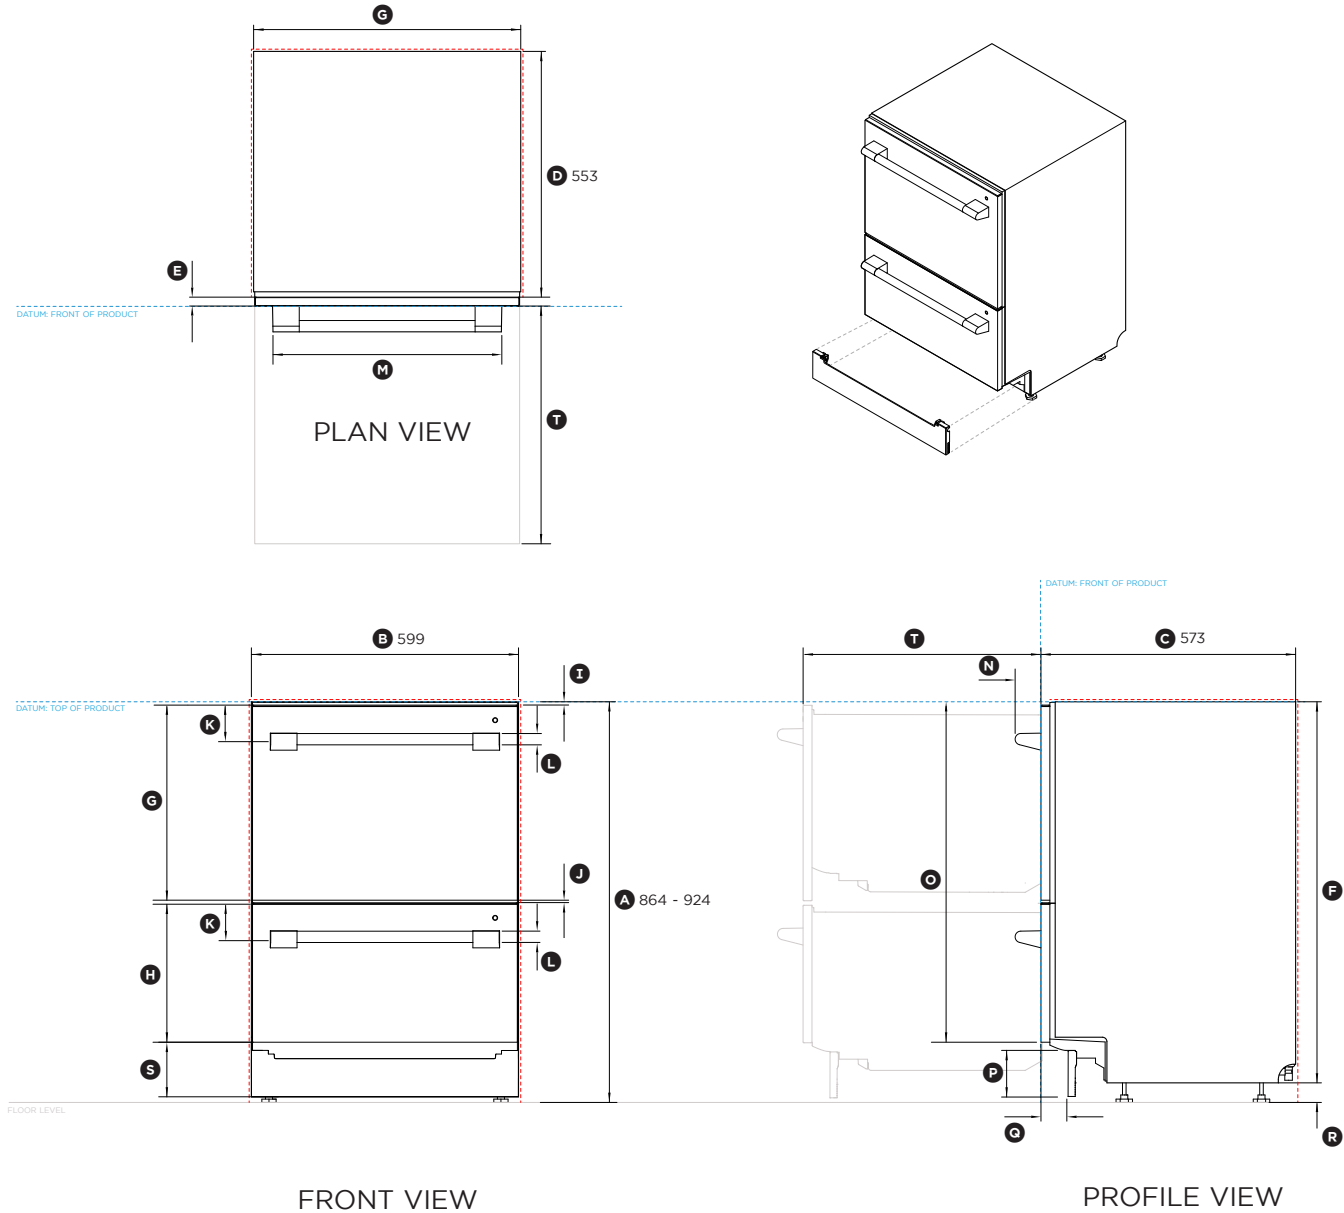

0 100 200 400
Millimetres