

## **30" CONTEMPORARY OVENS AND COMPANIONS**

---

# PLANNING GUIDE

---

### **SERIES 9 & 11**

**SELF-CLEANING OVEN** | OB30SCPUDX3

**SELF-CLEANING STEAM ASSIST OVEN** | OB30SCPSUDX3

**COMBI-STEAM** | OS30SCUDX3

**COMPACT COMBI-STEAM** | OS30NCUDX3

**COMPACT CONVECTION-SPEED** | OM30NCUDX3

**WARMING DRAWER** | WB30SCX3, WB30SDEI3

**VACUUM DRAWER** | VB30SCX3, VB30SDEI3

**FISHER & PAYKEL**

INTRODUCTION

This comprehensive planning guide provides you with the framework and tools to achieve your desired design outcome with Fisher & Paykel appliances. In this guide, you will find a range of conceptual, detailed, and dimensional product information to bring your ideas to life and create spaces that truly reflect your vision.

SUPPORT

For additional design planning and installation support please contact the Fisher & Paykel design support team.  
**designsupport@fisherpaykel.com**

NOTES

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Refer to our website [fisherpaykel.com](https://fisherpaykel.com) for the latest document version. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Specific installation guidance will be available with the product on delivery and on our website.

| CONCEPT DESIGN                  | PAGE | DEVELOPED AND DETAILED DESIGN   | PAGE | DEVELOPED AND DETAILED DESIGN                  | PAGE |
|---------------------------------|------|---------------------------------|------|------------------------------------------------|------|
| DESIGN CHOICE                   |      | DATA SHEETS                     |      | PLANNING CONSIDERATIONS                        |      |
| Styles                          | 4    | Self-Cleaning Oven              | 23   | Cabinetry Preparation                          | 33   |
| Contemporary Family             | 5    | Self-Cleaning Steam Assist Oven | 24   | Clearances                                     | 34   |
| Installation Options            | 6    | Combi-Steam Oven                | 25   | Ventilation                                    | 35   |
| Overview                        | 7    | Compact Combi-Steam Oven        | 26   | Stack Height                                   | 36   |
|                                 |      | Compact Convection-Speed Oven   | 27   | Self-Cleaning Oven                             | 37   |
| SPECIFICATION GUIDE             |      | Warming Drawer                  | 28   | Self-Cleaning Steam Assist Oven                | 38   |
| Self-Cleaning Oven              | 9    | Integrated Warming Drawer       | 29   | Combi-Steam Oven                               | 39   |
| Self-Cleaning Steam Assist Oven | 10   | Vacuum Seal Drawer              | 30   | Compact Combi-Steam Oven                       | 40   |
| Combi-Steam Oven                | 11   | Integrated Vacuum Seal Drawer   | 31   | Compact Convection-Speed Oven                  | 41   |
| Compact Combi-Steam Oven        | 12   |                                 |      | Warming Drawer                                 | 42   |
| Compact Convection-Speed Oven   | 13   |                                 |      | Integrated Warming Drawer                      | 43   |
| Warming Drawer                  | 14   |                                 |      | Vacuum Seal Drawer                             | 44   |
| Integrated Warming Drawer       | 15   |                                 |      | Integrated Vacuum Seal Drawer                  | 45   |
| Vacuum Seal Drawer              | 16   |                                 |      |                                                |      |
| Integrated Vacuum Seal Drawer   | 17   |                                 |      | SERVICES                                       |      |
| Dimensions - Ovens              | 18   |                                 |      | Power Cord Length and Location - Ovens         | 47   |
| Dimensions - Compact Ovens      | 19   |                                 |      | Power Cord Length and Location - Compact Ovens | 48   |
| Dimensions - Drawers            | 20   |                                 |      | Power Cord Length and Location - Companions    | 49   |
| Services                        | 21   |                                 |      |                                                |      |

## DESIGN CHOICE



**MINIMAL STYLE - HANDLELESS**

**MINIMAL STYLE**

**CONTEMPORARY STYLE**

**PROFESSIONAL STYLE**

Celebrating a singular aesthetic to blend seamlessly into the kitchen, Minimal style ovens feature subtle textural and tonal contrasts for a sense of refinement and purity.

Defined by clean lines and timeless design cues, Contemporary style ovens bring a sense of balance and refinement. A versatile aesthetic that complements a range of kitchen styles.

Distinctive and bold, Professional style ovens are the perfect interpretation of the commercial kitchen for the home chef. Experience refined performance with stainless steel construction that is built to last.

This Planning Guide is for the Contemporary style featuring 30" Ovens and Companions. For information on other styles, please visit the Fisher and Paykel website. To see what models are available, head to the 'Overview' section in this Planning Guide.






The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://fisherpaykel.com)

FINISH



Brushed Silver Glass


OVENS


| SELF-CLEANING                                                                     | SELF-CLEANING<br>STEAM<br>ASSIST                                                  | STEAM                                                                             | SPEED                                                                              |                                                                                     |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |  |  |

COMPANIONS


WARMING DRAWERS

VACUUM SEAL DRAWERS






INSTALLATION OPTIONS

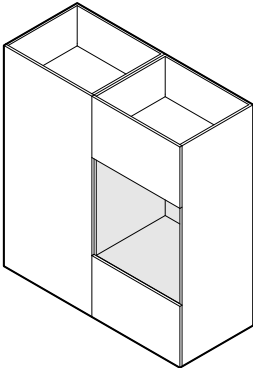

Installation in wall

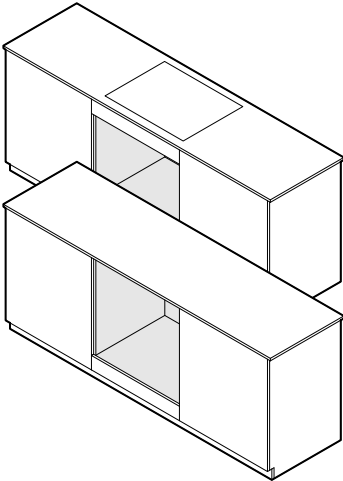

Installation under-bench

\*Integrated model, panel ready for a custom front panel.

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://fisherpaykel.com)

FISHER & PAYKEL

90004606C

PLANNING GUIDE 30" OVENS AND COMPANIONS VERSION C - OCTOBER 2025

© FISHER & PAYKEL APPLIANCES LIMITED 2025

PAGE 5

CONSIDERATIONS


Different configurations possible, consider heights for grid and row installations.

STACK HEIGHT


Stack Height is overall product height with minimum clearance above appliance front panel to upper cabinetry front panel or appliance.

STACKED INSTALLATION

Stack Height  
52 3/8" (1331mm)




Stack Height  
57 9/16" (1462mm)




GRID INSTALLATION


Stack Height  
46 7/8" (1191mm)



Stack Height  
28 3/4" (731mm)




Stack Height  
28 3/4" (731mm)





















ROW INSTALLATION

Stack Height  
28 3/4" (731mm)

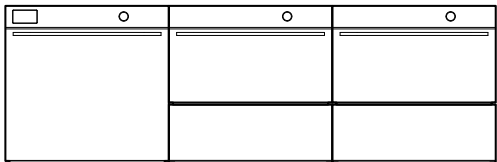

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://fisherpaykel.com)

|                                |                                                                                   |                                                                                   |                                                                                    |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
|--------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| FRONT<br>ELEVATION             |  |  |  |  |  |  |  |
|                                |                                                                                   |                                                                                   |                                                                                    |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
| SIDE<br>ELEVATION              |  |  |  |  |  |  |  |
|                                |                                                                                   |                                                                                   |                                                                                    |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
|                                |  |  |  |  |  |  |  |
|                                | SELF-CLEANING OVEN                                                                | SELF-CLEANING<br>STEAM ASSIST OVEN                                                | COMBI-STEAM OVEN                                                                   | COMPACT COMBI-<br>STEAM OVEN                                                        | COMPACT<br>CONVECTION-SPEED<br>OVEN                                                 | WARMING DRAWER                                                                      | VACUUM SEAL<br>DRAWER                                                               |
| Series                         | Series 9                                                                          | Series 11                                                                         | Series 11                                                                          | Series 9                                                                            | Series 9                                                                            | Series 9                                                                            | Series 9                                                                            |
| Brushed Silver Glass<br>Models | OB30SCPUDX3                                                                       | OB30SCPSUDX3                                                                      | OS30SCUDX3                                                                         | OS30NCUDX3                                                                          | OM30NCUDX3                                                                          | WB30SCX3                                                                            | VB30SCX3                                                                            |
| Integrated Models              | -                                                                                 | -                                                                                 | -                                                                                  | -                                                                                   | -                                                                                   | WB30SDEI3                                                                           | VB30SDEI3                                                                           |
| Interface                      | 6.8" Touchscreen                                                                  | 6.8" Touchscreen                                                                  | 6.8" Touchscreen                                                                   | 6.8" Touchscreen                                                                    | 6.8" Touchscreen                                                                    | -                                                                                   | -                                                                                   |
| Overall Height                 | 28 11/16" (729mm)                                                                 | 28 11/16" (729mm)                                                                 | 23 9/16" (598mm)                                                                   | 18" (458mm)                                                                         | 18" (458mm)                                                                         | 10 11/16" (271mm)                                                                   | 10 11/16" (271mm)                                                                   |
| Front Panel Thickness          | 13/16" (20mm)                                                                     | 13/16" (20mm)                                                                     | 13/16" (20mm)                                                                      | 13/16" (20mm)                                                                       | 13/16" (20mm)                                                                       | 13/16" (20mm)                                                                       | 13/16" (20mm)                                                                       |

\*Integrated models available.

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](#)

## **SPECIFICATION GUIDE**

### SERIES 11 & 9





**OVERVIEW**

Designed to be distinctive and timeless, this Contemporary oven matches with our Contemporary style family of appliances. Pyrolytic self-cleaning simplifies maintenance, while precise cooking methods with temperature and heat type recommendations for a wide range of food types are easily accessed via the large touch screen and SmartHQ™.

**PRODUCTS**

**OB30SCPUDX3**  
30" Series 9 Contemporary Self-Cleaning Oven

**SERIES & STYLE**

Series 9  
Contemporary

**FEATURES**

- ① Contemporary style is distinctive and timeless. Designed to match with our Contemporary style family of appliances
- ② Self-cleaning pyrolytic function breaks down food residue for an easy clean
- ③ Premium soft-close door with advanced thermal performance
- ④ Generous 4.6 cu ft useable capacity
- ⑤ Large 6.8" touchscreen is intuitive and easy to use
- ⑥ Create perfect results with precise cooking methods, with temperature and heat type recommendations for your food type
- ⑦ Twin vertical fans, perfect for multi-shelf cooking
- ⑧ Includes a wired temperature sensor for real-time monitoring of cooking temperatures
- ⑨ Connected capability via the SmartHQ™ app gives control & visibility from anywhere at anytime

**ACCESSORIES**

- ① Self-cleaning-proof Side Ladders
- ② Full Extension Sliding Shelf (x3)
- ③ Multi-functional Air Fry Tray
- ④ Roasting Dish
- ⑤ Wired Temperature Sensor

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://fisherpaykel.com)



**OVERVIEW**

Designed to be distinctive and timeless, this Contemporary oven matches with our Contemporary style family of appliances. Steam Assist enhances convection cooking, while pyrolytic cleaning simplifies maintenance. Precise cooking methods with temperature and heat type recommendations for a wide range of food types are easily accessed via the large touch screen and SmartHQ™.

**PRODUCTS**

**OB30SCPSUDX3**  
30" Series 11 Contemporary Self-Cleaning Steam Assist Oven

**SERIES & STYLE**

Series 11  
Contemporary

**ACCESSORIES**

- ① Self-cleaning-proof Side Ladders
- ② Full Extension Sliding Shelf (x3)
- ③ Multi-functional Air Fry Tray
- ④ Roasting Dish
- ⑤ Wired Temperature Sensor
- ⑥ Descale Solution - 2 sachets (Part 580925)

**FEATURES**

- ① Contemporary style is distinctive and timeless. Designed to match with our Contemporary style family of appliances
- ② Steam Assist combines convection heat with steam to enhance the cooking process
- ③ Self-cleaning pyrolytic function breaks down food residue for an easy clean
- ④ Premium soft-close door with advanced thermal performance
- ⑤ Generous 4.6 cu ft useable capacity
- ⑥ Large 6.8" touchscreen is intuitive and easy to use.
- ⑦ Create perfect results with precise cooking methods, with temperature and heat type recommendations for your food type
- ⑧ Twin vertical fans, perfect for multi-shelf cooking
- ⑨ Includes a wired temperature sensor for real-time monitoring of cooking temperatures
- ⑩ Connected capability via the SmartHQ™ app gives control & visibility from anywhere at anytime

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://fisherpaykel.com)



OVERVIEW

Designed to be distinctive and timeless, this Contemporary Combi-Steam oven matches with our Contemporary style family of appliances. Featuring a larger cavity ideal for cooking larger dishes and multiple trays simultaneously. With versatile cooking options including steam or convection, plus a Steam Clean function for easy maintenance. Precise cooking methods with temperature and heat type recommendations for a wide range of food types are easily accessed via the large touch screen and SmartHQ™.

PRODUCTS

OS30SCUDX3  
30" Series 11 Contemporary Combi-Steam Oven

SERIES & STYLE

Series 11  
Contemporary

ACCESSORIES

- ① Chrome Side Ladders
- ② Full Extension Sliding Shelf (x2)
- ③ Step Down Wire Shelf
- ④ Roasting Dish
- ⑤ Broil Rack
- ⑥ Smokeless Broil Tray

FEATURES

- ① Contemporary style is distinctive and timeless. Designed to match with our Contemporary style family of appliances
- ② Versatile cooking options with steam or convection heat for optimal results
- ③ Premium soft open and close door
- ④ Generous 2.5 cu ft useable capacity with six shelf positions
- ⑤ Large 6.8" touchscreen is intuitive and easy to use
- ⑥ Create perfect results with precise cooking methods, with temperature and heat type recommendations for your food type
- ⑦ Moisture control and even heat distribution thanks to ActiveVent™ and AeroTech™ technology
- ⑧ Steam Clean function ensures a spotless oven with minimal effort
- ⑨ Includes a wired temperature sensor for real-time monitoring of cooking temperatures
- ⑩ Connected capability via the SmartHQ™ app gives control & visibility from anywhere at anytime

ACCESSORIES

- ⑦ Large Perforated Steam Dish
- ⑧ Small Perforated Steam Dish
- ⑨ Large Steam Dish
- ⑩ Wired Temperature Sensor
- ⑪ Descale Solution - 2 sachets (Part 580925)

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](http://fisherpaykel.com)



The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://fisherpaykel.com)

### OVERVIEW

Designed to be distinctive and timeless, this Contemporary Combi-Steam oven matches with our Contemporary style family of appliances. With versatile cooking options including steam or convection, plus a Steam Clean function for easy maintenance. Precise cooking methods with temperature and heat type recommendations for a wide range of food types are easily accessed via the large touch screen and SmartHQ™.

### PRODUCTS

**OS30NCUDX3**  
30" Series 9 Contemporary Compact Combi-Steam Oven

### SERIES & STYLE

Series 9  
Contemporary

### ACCESSORIES

- ① Chrome Side Ladders
- ② Full Extension Sliding Shelf
- ③ Flat Wire Shelf
- ④ Roasting Dish
- ⑤ Broil Rack

### FEATURES

- ① Contemporary style is distinctive and timeless. Designed to match with our Contemporary style family of appliances
- ② Versatile cooking options with steam or convection heat for optimal results
- ③ Premium soft open and close door
- ④ 1.6 cu ft useable capacity with four shelf positions
- ⑤ Large 6.8" touchscreen is intuitive and easy to use
- ⑥ Create perfect results with precise cooking methods, with temperature and heat type recommendations for your food type
- ⑦ Moisture control and even heat distribution thanks to ActiveVent™ and AeroTech™ technology
- ⑧ Steam Clean function ensures a spotless oven with minimal effort
- ⑨ Includes a wired temperature sensor for real-time monitoring of cooking temperatures
- ⑩ Connected capability via the SmartHQ™ app gives control & visibility from anywhere at anytime

### ACCESSORIES

- ⑥ Large Perforated Steam Dish
- ⑦ Small Perforated Steam Dish
- ⑧ Large Steam Dish
- ⑨ Wired Temperature Sensor
- ⑩ Descale Solution - 2 sachets (Part 580925)



**OVERVIEW**

Designed to be distinctive and timeless, this Contemporary Convection-Speed oven matches with our Contemporary style family of appliances. Versatile cooking options including microwave or convection offer efficient heating across a variety of dishes. Precise cooking methods with temperature and heat type recommendations for a wide range of food types are easily accessed via the large touch screen and SmartHQ™.

**PRODUCTS**

**OM30NCUDX3**  
30" Series 9 Contemporary Compact Convection-Speed Oven

**SERIES & STYLE**

Series 9  
Contemporary

**FEATURES**



- ① Contemporary style is distinctive and timeless. Designed to match with our Contemporary style family of appliances
- ② Combines fast microwave cooking with even convection heat for versatile, efficient heating across a variety of dishes
- ③ With soft open and close, the CoolTouch door is safe to touch from the outside - protecting hands and surrounding cabinetry
- ④ Generous 1.3 cu ft useable capacity with four shelf positions
- ⑤ Large 6.8" touchscreen is intuitive and easy to use
- ⑥ Create perfect results with precise cooking methods, with temperature and heat type recommendations for your food type
- ⑦ 28 functions, including four microwave-only, 14 traditional oven and four combination settings
- ⑧ Includes a wired temperature sensor for real-time monitoring of cooking temperatures
- ⑨ Connected capability via the SmartHQ™ app gives control & visibility from anywhere at anytime

**ACCESSORIES**

- ① Chrome Side Ladders
- ② Flat Wire Shelf
- ③ Step Down Wire Shelf
- ④ Broil Rack
- ⑤ Glass Tray
- ⑥ Wired Temperature Sensor

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://fisherpaykel.com)



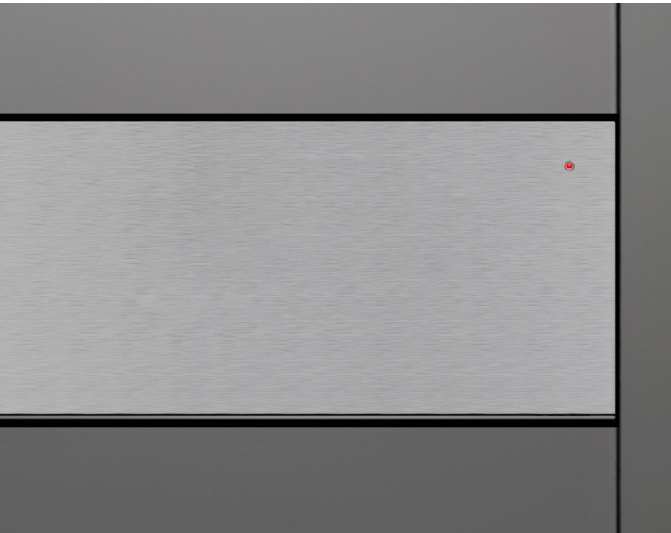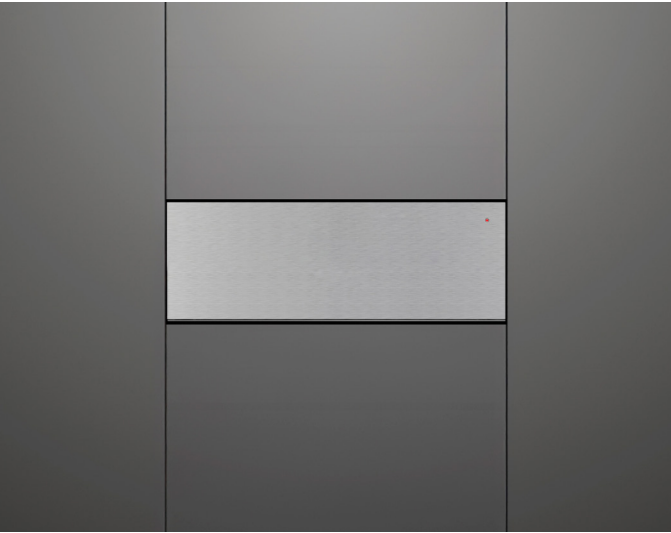

**OVERVIEW**

Designed to be distinctive and timeless, this Contemporary Warming Drawer matches with our Contemporary style family of appliances. Featuring a push-to-open mechanism, intuitive touch controls, and a smooth glass base for easy cleaning. With six tailored programmes and space for 16 place settings, it keeps meals ready to serve.

**PRODUCTS**

**WB30SCX3**  
30" Series 9 Contemporary Warming Drawer

**SERIES & STYLE**

Series 9  
Contemporary

**FEATURES**

- ① Contemporary style is distinctive and timeless. Designed to match with our Contemporary style family of appliances
- ② Push-to-open drawer, designed for added convenience
- ③ Simple and intuitive touch controls for effortless operation
- ④ Easy-to-clean glass base
- ⑤ Automatic switch-off and delayed start functionality to help keep dishes warm until it is time to serve
- ⑥ Room for 16 standard-sized place settings
- ⑦ Six tailored programmes including Warming, Proofing, Dehydrating, and Slow Cooking offer convenience and flexibility


**ACCESSORIES**

- ① Accessory rack for optimising space

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://fisherpaykel.com)



Integrated Warming Drawer WB30SDEI3 with Compact Combi-Steam Oven OS30NCUDX3

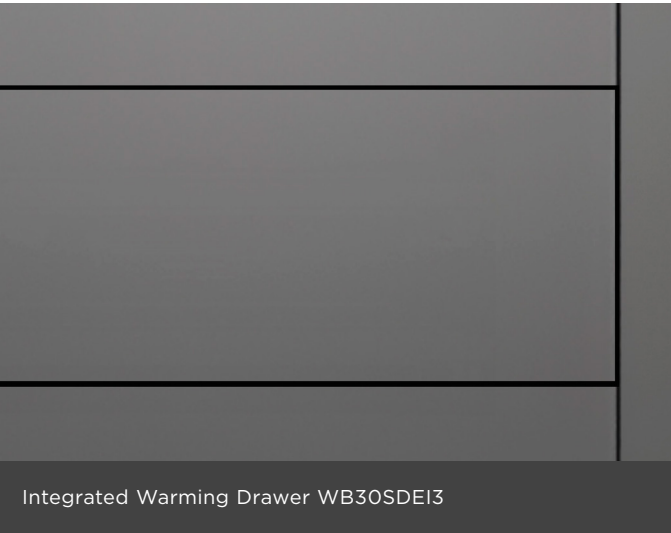

Integrated Warming Drawer WB30SDEI3

**OVERVIEW**

Panel ready design allows for seamless integration and customisation of this Warming Drawer with kitchen cabinetry for a cohesive kitchen look. Featuring a push-to-open mechanism, intuitive touch controls, and a smooth glass base for easy cleaning. With six tailored programmes and space for 16 place settings, it keeps meals ready to serve.

**PRODUCTS**

**WB30SDEI3\***  
30" Series 9 Integrated Warming Drawer

\*Panel ready.

**SERIES & STYLE**

Series 9  
Integrated


**FEATURES**

- ① Panel ready design allows for seamless integration and customisation with kitchen cabinetry for a cohesive kitchen look
- ② Push-to-open drawer, designed for added convenience
- ③ Simple and intuitive touch controls for effortless operation
- ④ Automatic switch-off and delayed start functionality, to help keep dishes warm until it is time to serve
- ⑤ Room for 16 standard-sized place settings
- ⑥ Six tailored programmes including Warming, Proofing, Dehydrating, and Slow Cooking offer convenience and flexibility

**ACCESSORIES**

- ① Accessory rack for optimising space

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://fisherpaykel.com)

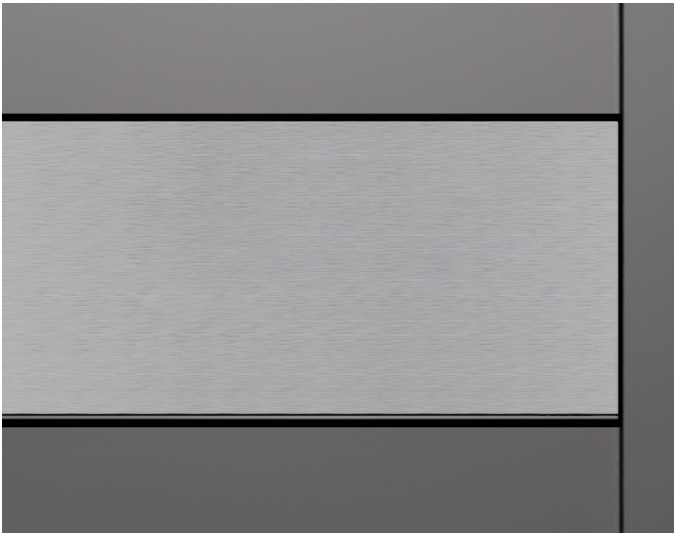

**OVERVIEW**

Designed to be distinctive and timeless, this Contemporary Vacuum Drawer matches with our Contemporary style family of appliances. A push-to-open mechanism and intuitive touch controls offer effortless use, while three vacuum and heat sealing levels support sous vide preparation, marinating, and food storage, using reusable and BPA-free food-grade bags.

**PRODUCTS**

**VB30SCX3**  
30" Series 9 Contemporary Vacuum Seal Drawer

**SERIES & STYLE**

Series 9  
Contemporary

**FEATURES**


- ① Contemporary style is distinctive and timeless. Designed to match with our Contemporary style family of appliances
- ② Push-to-open drawer, designed for added convenience
- ③ Simple and intuitive touch controls for effortless operation
- ④ Easy-to-clean glass base
- ⑤ Three levels of vacuum and heat sealing - for easy re-sealing, food portioning, marinating, storage and extending shelf life
- ⑥ Allows effortless preparation for sous vide cooking
- ⑦ Our food-grade, BPA-free bags are an excellent storage option — these can be re-used if sealed and cut appropriately

**ACCESSORIES**

- ① Large BPA-free Vacuum Bags - 50 bags (Part 793034)
- ② Small BPA-free Vacuum Bags - 50 bags (Part 793033)
- ③ External Vacuuming Accessory Kit

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://fisherpaykel.com)



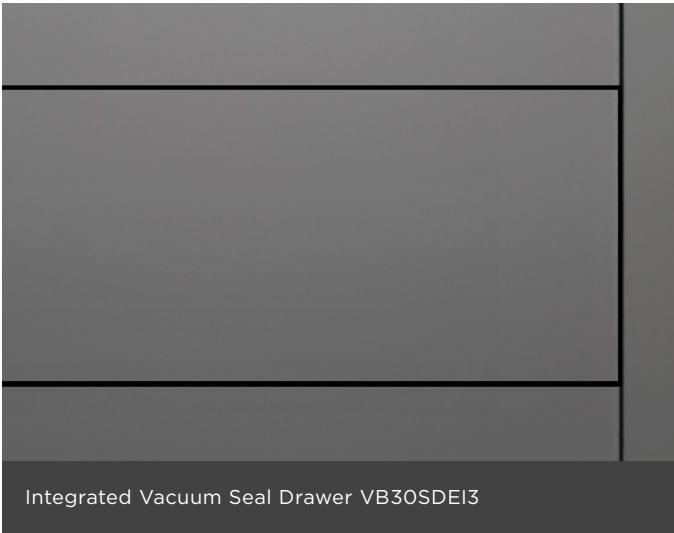

**OVERVIEW**

Panel ready design allows for seamless integration and customisation of this Vacuum Seal Drawer with kitchen cabinetry for a cohesive kitchen look. A push-to-open mechanism and intuitive touch controls offer effortless use, while three vacuum and heat sealing levels support sous vide preparation, marinating, and food storage, using reusable and BPA-free food-grade bags.

**PRODUCTS**

**VB30SDEI3\***  
30" Series 9 Integrated Vacuum Seal Drawer

\*Panel ready.

**SERIES & STYLE**

Series 9  
Integrated

**FEATURES**

- ① Panel ready design allows for seamless integration and customisation with kitchen cabinetry for a cohesive kitchen look
- ② Push-to-open drawer, designed for added convenience
- ③ Simple and intuitive touch controls for effortless operation
- ④ Three levels of vacuum and heat sealing - for easy re-sealing, food portioning, marinating, storage and extending shelf life
- ⑤ Allows effortless preparation for sous vide cooking
- ⑥ Our food-grade, BPA-free bags are an excellent storage option — these can be re-used if sealed and cut appropriately







**ACCESSORIES**

- ① Large BPA-free Vacuum Bags - 50 bags (Part 793034)
- ② Small BPA-free Vacuum Bags - 50 bags (Part 793033)
- ③ External Vacuuming Accessory Kit

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://fisherpaykel.com)

PRODUCT DIMENSIONS

CAVITY DIMENSIONS

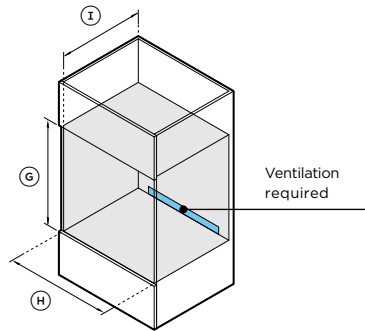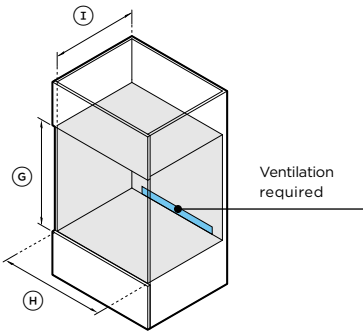

| PRODUCT DIMENSIONS |                             |  |
|--------------------|-----------------------------|--|
| A                  | Overall height              |  |
| B                  | Overall width               |  |
| C                  | Chassis height              |  |
| D                  | Chassis width               |  |
| E                  | Chassis depth               |  |
| F                  | Control panel thickness     |  |
|                    | Depth with door fully open* |  |

\*Measured from front of control panel.

| CAVITY DIMENSIONS |                                 |  |
|-------------------|---------------------------------|--|
| G                 | Minimum inside height of cavity |  |
| H                 | Minimum inside width of cavity  |  |
| I                 | Minimum inside depth of cavity* |  |
|                   | Recommend cabinet height        |  |
|                   | Recommend cabinet width         |  |

\*Measured from front of chassis.\*\*Requires ventilation at the rear of the cavity. For more information, refer to the 'Ventilation' section of this Planning Guide.

| SELF-CLEANING OVEN<br>OB30SCPUDX3 |          |     |
|-----------------------------------|----------|-----|
|                                   | inch     | mm  |
| A                                 | 28 11/16 | 729 |
| B                                 | 29 7/8   | 758 |
| C                                 | 27 7/8   | 708 |
| D                                 | 28 3/8   | 720 |
| E                                 | 22 5/8   | 575 |
| F                                 | 13/16    | 20  |
|                                   | 23 3/8   | 594 |

|   | inch     | mm    |
|---|----------|-------|
| G | 28 1/32  | 712   |
| H | 28 1/2   | 724   |
| I | 23 1/2** | 597** |
|   | 28 3/4   | 731   |
|   | 30       | 762   |

| SELF-CLEANING STEAM ASSIST OVEN<br>OB30SCPSUDX3 |          |     |
|-------------------------------------------------|----------|-----|
|                                                 | inch     | mm  |
| A                                               | 28 11/16 | 729 |
| B                                               | 29 7/8   | 758 |
| C                                               | 27 7/8   | 708 |
| D                                               | 28 3/8   | 720 |
| E                                               | 22 5/8   | 575 |
| F                                               | 13/16    | 20  |
|                                                 | 23 3/8   | 594 |

|   | inch     | mm    |
|---|----------|-------|
| G | 28 1/32  | 712   |
| H | 28 1/2   | 724   |
| I | 23 1/2** | 597** |
|   | 28 3/4   | 731   |
|   | 30       | 762   |





| COMBI-STEAM OVEN<br>OS30SCUDX3 |         |     |
|--------------------------------|---------|-----|
|                                | inch    | mm  |
| A                              | 23 9/16 | 598 |
| B                              | 29 7/8  | 758 |
| C                              | 22 5/8  | 575 |
| D                              | 28 3/8  | 720 |
| E                              | 22 7/16 | 545 |
| F                              | 13/16   | 20  |
|                                | 18 1/8  | 460 |

|   | inch     | mm  |
|---|----------|-----|
| G | 22 13/16 | 580 |
| H | 28 1/2   | 724 |
| I | 21 5/8   | 550 |
|   | 24       | 600 |
|   | 30       | 762 |

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

PRODUCT DIMENSIONS

CAVITY DIMENSIONS

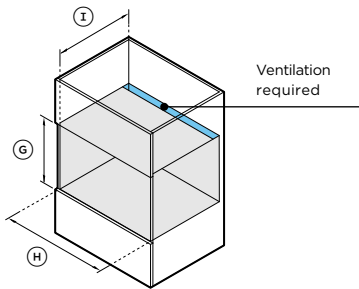

| PRODUCT DIMENSIONS                     |  |
|----------------------------------------|--|
| A Overall height                       |  |
| B Overall width                        |  |
| C Chassis height                       |  |
| D Chassis width                        |  |
| E Chassis depth                        |  |
| F Control panel thickness              |  |
| Depth with door fully open*            |  |
| *Measured from front of control panel. |  |
| CAVITY DIMENSIONS                      |  |
| G Minimum inside height of cavity      |  |
| H Minimum inside width of cavity       |  |
| I Minimum inside depth of cavity*      |  |
| Recommend cabinet height               |  |
| Recommend cabinet width                |  |





\*Measured from front of chassis. \*\*Requires ventilation at the rear of the cavity. For more information, refer to the 'Ventilation' section of this Planning Guide.

| COMPACT COMBI-STEAM OVEN               |         |     |
|----------------------------------------|---------|-----|
| OS30NCUDX3                             |         |     |
|                                        | inch    | mm  |
| A Overall height                       | 18      | 458 |
| B Overall width                        | 29 7/8  | 758 |
| C Chassis height                       | 17 1/8  | 435 |
| D Chassis width                        | 28 3/8  | 720 |
| E Chassis depth                        | 21 7/16 | 545 |
| F Control panel thickness              | 13/16   | 20  |
| Depth with door fully open*            | 12 5/8  | 320 |
| *Measured from front of control panel. |         |     |
|                                        | inch    | mm  |
| G Minimum inside height of cavity      | 17 5/16 | 440 |
| H Minimum inside width of cavity       | 28 1/2  | 724 |
| I Minimum inside depth of cavity*      | 21 5/8  | 550 |
| Recommend cabinet height               | 18 1/8  | 460 |
| Recommend cabinet width                | 30      | 762 |





| COMPACT CONVECTION-SPEED OVEN          |          |       |
|----------------------------------------|----------|-------|
| OM30NCUDX3                             |          |       |
|                                        | inch     | mm    |
| A Overall height                       | 18       | 458   |
| B Overall width                        | 29 7/8   | 758   |
| C Chassis height                       | 17 1/8   | 435   |
| D Chassis width                        | 28 3/8   | 720   |
| E Chassis depth                        | 21 7/16  | 545   |
| F Control panel thickness              | 13/16    | 20    |
| Depth with door fully open*            | 12 5/8   | 320   |
| *Measured from front of control panel. |          |       |
|                                        | inch     | mm    |
| G Minimum inside height of cavity      | 17 5/16  | 440   |
| H Minimum inside width of cavity       | 28 1/2   | 724   |
| I Minimum inside depth of cavity**     | 21 5/8** | 550** |
| Recommend cabinet height               | 18 1/8   | 460   |
| Recommend cabinet width                | 30       | 762   |

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://fisherpaykel.com)

PRODUCT DIMENSIONS



CAVITY DIMENSIONS



| PRODUCT DIMENSIONS      |          |
|-------------------------|----------|
| A Overall height        | 10 11/16 |
| B Overall width         | 29 7/8   |
| C Chassis height        | 10 11/16 |
| D Chassis width         | 27 3/4   |
| E Chassis depth*        | 21 9/16  |
| F Front panel thickness | 13/16    |
| Front panel height      | 10 1/2   |
| Front panel width       | 29 7/8   |

| WARMING DRAWER<br>WB30SCX3 |     |
|----------------------------|-----|
| inch                       | mm  |
| 10 11/16                   | 271 |
| 29 7/8                     | 758 |
| 10 11/16                   | 271 |
| 27 3/4                     | 704 |
| 21 9/16                    | 547 |
| 13/16                      | 20  |
| 10 1/2                     | 267 |
| 29 7/8                     | 758 |

| INTEGRATED WARMING DRAWER<br>WB30SDEI3 |           |
|----------------------------------------|-----------|
| inch                                   | mm        |
| 10 11/16                               | 271       |
| 29 7/8                                 | 758       |
| 10 11/16                               | 271       |
| 28 15/32                               | 723       |
| 22 9/32                                | 566       |
| min 5/8***                             | min 16*** |
| min 10 1/2                             | min 267   |
| min 29 7/8                             | min 758   |

| VACUUM SEAL DRAWER<br>VB30SCX3 |       |
|--------------------------------|-------|
| inch                           | mm    |
| 10 11/16                       | 271   |
| 29 7/8                         | 758   |
| 10 11/16                       | 271   |
| 28 1/2**                       | 724** |
| 21 11/16                       | 551   |
| 13/16                          | 20    |
| 10 1/2                         | 267   |
| 29 7/8                         | 758   |

| INTEGRATED VACUUM SEAL DRAWER<br>VB30SDEI3 |           |
|--------------------------------------------|-----------|
| inch                                       | mm        |
| 10 11/16                                   | 271       |
| 29 7/8                                     | 758       |
| 10 11/16                                   | 271       |
| 28 15/32**                                 | 723**     |
| 22 1/2                                     | 572       |
| min 5/8***                                 | min 16*** |
| min 10 1/2                                 | min 267   |
| min 29 7/8                                 | min 758   |

\*Including power plug. \*\*Including side brackets. \*\*\*A clearance of 1/16" (2mm) between the cabinet and the custom panel is required for the push-to-open mechanism (spacer included). Maximum custom panel weight 11 lb (5kg).

| CAVITY DIMENSIONS                 |          |
|-----------------------------------|----------|
| G Minimum inside height of cavity | 10 3/4   |
| H Minimum inside width of cavity  | 28 1/2   |
| I Minimum inside depth of cavity* | 22 13/16 |
| Recommend cabinet height          | 10 3/4   |
| Recommend cabinet width           | 30       |

|          |     |
|----------|-----|
| inch     | mm  |
| 10 3/4   | 273 |
| 28 1/2   | 724 |
| 22 13/16 | 580 |
| 10 3/4   | 273 |
| 30       | 762 |


|          |     |
|----------|-----|
| inch     | mm  |
| 10 3/4   | 273 |
| 28 1/2   | 724 |
| 22 13/16 | 580 |
| 10 3/4   | 273 |
| 30       | 762 |

|          |     |
|----------|-----|
| inch     | mm  |
| 10 3/4   | 273 |
| 28 1/2   | 724 |
| 22 13/16 | 580 |
| 10 3/4   | 273 |
| 30       | 762 |

|          |     |
|----------|-----|
| inch     | mm  |
| 10 3/4   | 273 |
| 28 1/2   | 724 |
| 22 13/16 | 580 |
| 10 3/4   | 273 |
| 30       | 762 |

\*Measured from front of chassis.  
Note: Drawers can fully support 30inch Fisher & Paykel ovens, without adding shelf in between.

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://www.fisherpaykel.com)

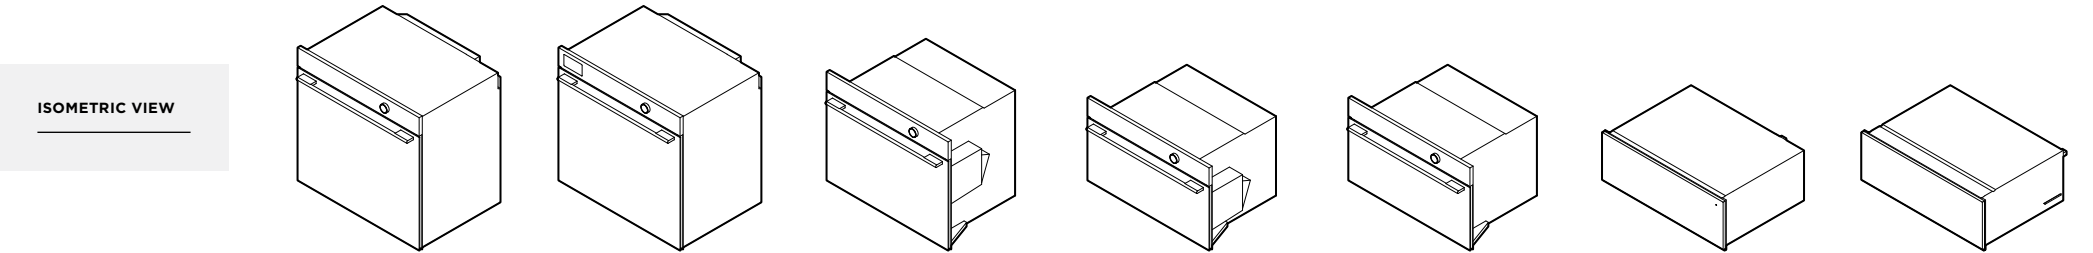


|                           | SELF-CLEANING OVEN<br>OB30SCPUDX3 | SELF-CLEANING STEAM<br>ASSIST OVEN<br>OB30SCPSUDX3 | COMBI-STEAM OVEN<br>OS30SCUDX3 | COMPACT COMBI-STEAM<br>OVEN<br>OS30NCUDX3 | COMPACT CONVECTION-<br>SPEED OVEN<br>OM30NCUDX3 | WARMING DRAWER<br>WB30SCX3, WB30SDEI3   | VACUUM SEAL DRAWER<br>VB30SCX3, VB30SDEI3 |
|---------------------------|-----------------------------------|----------------------------------------------------|--------------------------------|-------------------------------------------|-------------------------------------------------|-----------------------------------------|-------------------------------------------|
| PRODUCT REQUIREMENTS      |                                   |                                                    |                                |                                           |                                                 |                                         |                                           |
| Supply                    | 208 or 240 V, 60 Hz               | 208 or 240 V, 60 Hz                                | 208 or 240 V, 60 Hz            | 208 or 240 V, 60 Hz                       | 208 or 240 V, 60 Hz                             | 120 V, 60 Hz                            | 120 V, 60 Hz                              |
| Service                   | 20 A                              | 20 A                                               | 20 A                           | 20 A                                      | 20 A                                            | 15 A                                    | 15 A                                      |
| Connection                | Hard wired<br>78 3/4"(2000mm)     | Hard wired<br>78 3/4"(2000mm)                      | Hard wired<br>78 3/4"(2000mm)  | Hard wired<br>78 3/4"(2000mm)             | Hard wired<br>78 3/4"(2000mm)                   | Plug with flex cord<br>70 7/8" (1800mm) | Plug with flex cord<br>70 7/8" (1800mm)   |
| WEIGHT                    |                                   |                                                    |                                |                                           |                                                 |                                         |                                           |
| Packaged                  | 209lb (95kg)                      | 214lb (97kg)                                       | 152lb (69kg)                   | 121lb (55kg)                              | 110lb (50kg)                                    | 66lb(30kg)<br>Integrated 60lb (27kg)    | 148lb(67kg)<br>Integrated 106lb (48kg)    |
| Unpackaged                | 176lb (80kg)                      | 181lb (82kg)                                       | 119lb (54kg)                   | 101lb (46kg)                              | 90lb (41kg)                                     | 55lb(25kg)<br>Integrated 51lb (23kg)    | 121lb(55kg)<br>Integrated 99lb (45kg)     |
| CAPACITY                  |                                   |                                                    |                                |                                           |                                                 |                                         |                                           |
| Total Oven capacity       | 4.9cu ft (137L)                   | 4.9cu ft (137L)                                    | 3cu ft (85L)                   | 1.9cu ft (55L)                            | 1.7cu ft (49L)                                  | -                                       | -                                         |
| Total water tank capacity | -                                 | 22.65fl oz (0.67L)                                 | 47.3fl oz (1.4L)               | 47.3fl oz (1.4L)                          | -                                               | -                                       | -                                         |


Note: Steam Ovens have internal water tanks which need to be filled manually. No external water supply is required.

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://fisherpaykel.com)

## DATA SHEETS

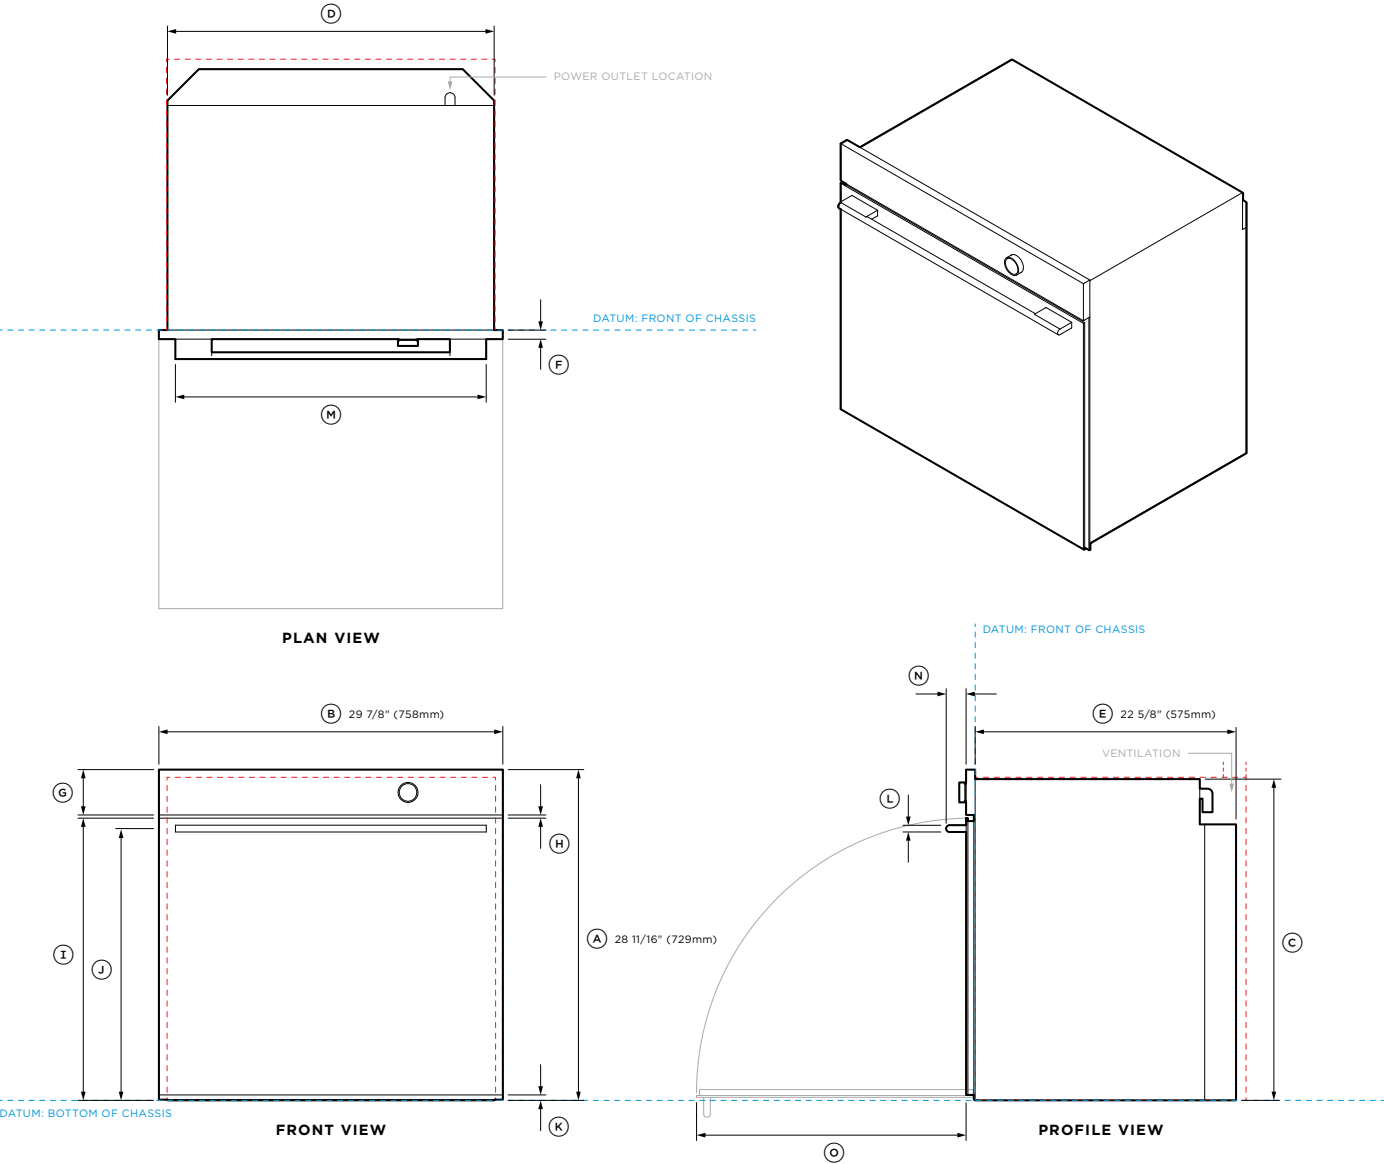

|                                                                                                                                                                                                                                                                                       |             |           |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|-----------|
| <b>Model no:</b>                                                                                                                                                                                                                                                                      |             |           |
| OB30SCPUDX3 30" Series 9 Contemporary Self-Cleaning Oven                                                                                                                                                                                                                              |             |           |
| <b>Product Dimensions</b>                                                                                                                                                                                                                                                             |             |           |
|                                                                                                                                                                                                                                                                                       | <b>inch</b> | <b>mm</b> |
| (A) Overall height of product                                                                                                                                                                                                                                                         | 28 11/16    | 729       |
| (B) Overall width of product                                                                                                                                                                                                                                                          | 29 7/8      | 758       |
| (C) Height of chassis                                                                                                                                                                                                                                                                 | 27 7/8      | 708       |
| (D) Width of chassis                                                                                                                                                                                                                                                                  | 28 3/8      | 720       |
| (E) Depth of chassis                                                                                                                                                                                                                                                                  | 22 5/8      | 575       |
| (F) Thickness of control panel (excludes handle and dial)                                                                                                                                                                                                                             | 13/16       | 20        |
| (G) Height of control panel                                                                                                                                                                                                                                                           | 3 15/16     | 100       |
| (H) Gap between door and control panel                                                                                                                                                                                                                                                | 9/32        | 7         |
| (I) Height from bottom datum to top of door                                                                                                                                                                                                                                           | 24 1/2      | 622       |
| (J) Height from bottom datum to centerline of handle                                                                                                                                                                                                                                  | 23 19/32    | 599       |
| (K) Visual gap height                                                                                                                                                                                                                                                                 | 15/32       | 12        |
| (L) Thickness of handle                                                                                                                                                                                                                                                               | 19/32       | 15        |
| (M) Width of handle                                                                                                                                                                                                                                                                   | 26 31/32    | 685       |
| (N) Depth of handle                                                                                                                                                                                                                                                                   | 1 3/4       | 44        |
| (O) Depth with door fully open*                                                                                                                                                                                                                                                       | 23 3/8      | 594       |
| *Measured from front of control panel.                                                                                                                                                                                                                                                |             |           |
| <b>Minimum Clearances</b>                                                                                                                                                                                                                                                             |             |           |
|                                                                                                                                                                                                                                                                                       | <b>inch</b> | <b>mm</b> |
| Minimum inside height of cavity                                                                                                                                                                                                                                                       | 28 1/32     | 712       |
| Minimum inside width of cavity                                                                                                                                                                                                                                                        | 28 1/2      | 724       |
| Minimum inside depth of cavity*                                                                                                                                                                                                                                                       | 23 1/2      | 597       |
| Rear ventilation height**                                                                                                                                                                                                                                                             | 2 5/32      | 55        |
| Rear ventilation width**                                                                                                                                                                                                                                                              | 24          | 600       |
| Minimum clearance above products control panel to upper cabinetry front panel or appliance                                                                                                                                                                                            | 1/16        | 2         |
| Minimum clearance between adjacent front panel or appliance                                                                                                                                                                                                                           | 1/16        | 2         |
| Recommended cabinet height                                                                                                                                                                                                                                                            | 28 3/4      | 731       |
| Recommended cabinet width                                                                                                                                                                                                                                                             | 30          | 762       |
| *Measured from front of chassis.                                                                                                                                                                                                                                                      |             |           |
| **A minimum ventilation area of 51in <sup>2</sup> (330cm <sup>2</sup> ), equivalent to 2" x 22 1/16" 2 5/32" x 24" (55mm x 600mm), is required. For more information, refer to the 'Ventilation' section of this Planning Guide.                                                      |             |           |
| ----- INDICATES PRODUCT DATUM                                                                                                                                                                                                                                                         |             |           |
| ----- INDICATES CABINETRY CLEARANCES                                                                                                                                                                                                                                                  |             |           |
| IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit <a href="https://fisherpaykel.com">fisherpaykel.com</a> |             |           |

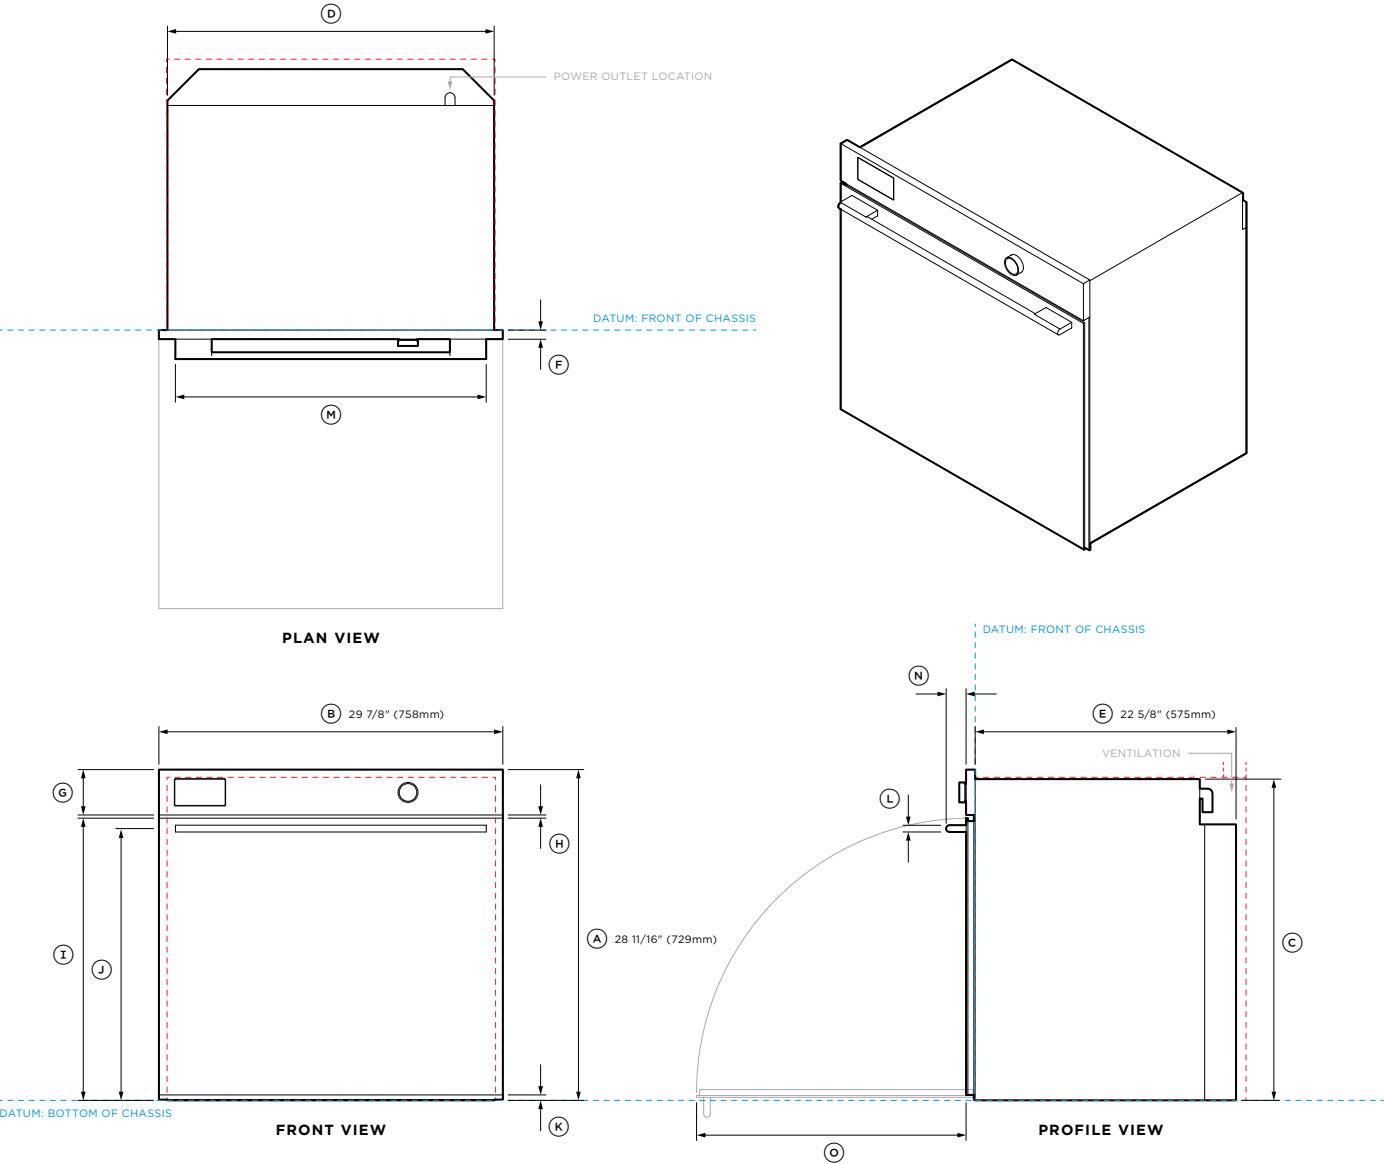

**Model no:**  
OB30SCPSUDX3 30" Series 11 Contemporary Self-Cleaning Steam Assist Oven

| Product Dimensions                                        | inch     | mm  |
|-----------------------------------------------------------|----------|-----|
| (A) Overall height of product                             | 28 11/16 | 729 |
| (B) Overall width of product                              | 29 7/8   | 758 |
| (C) Height of chassis                                     | 27 7/8   | 708 |
| (D) Width of chassis                                      | 28 3/8   | 720 |
| (E) Depth of chassis                                      | 22 5/8   | 575 |
| (F) Thickness of control panel (excludes handle and dial) | 13/16    | 20  |
| (G) Height of control panel                               | 3 15/16  | 100 |
| (H) Gap between door and control panel                    | 9/32     | 7   |
| (I) Height from bottom datum to top of door               | 24 1/2   | 622 |
| (J) Height from bottom datum to centerline of handle      | 23 19/32 | 599 |
| (K) Visual gap height                                     | 15/32    | 12  |
| (L) Thickness of handle                                   | 19/32    | 15  |
| (M) Width of handle                                       | 26 31/32 | 685 |
| (N) Depth of handle                                       | 1 3/4    | 44  |
| (O) Depth with door fully open*                           | 23 3/8   | 594 |

\*Measured from front of control panel.


| Minimum Clearances                                                                         | inch    | mm  |
|--------------------------------------------------------------------------------------------|---------|-----|
| Minimum inside height of cavity                                                            | 28 1/32 | 712 |
| Minimum inside width of cavity                                                             | 28 1/2  | 724 |
| Minimum inside depth of cavity*                                                            | 23 1/2  | 597 |
| Rear ventilation height**                                                                  | 2 5/32  | 55  |
| Rear ventilation width**                                                                   | 24      | 600 |
| Minimum clearance above products control panel to upper cabinetry front panel or appliance | 1/16    | 2   |
| Minimum clearance between adjacent front panel or appliance                                | 1/16    | 2   |
| Recommended cabinet height                                                                 | 28 3/4  | 731 |
| Recommended cabinet width                                                                  | 30      | 762 |

\*Measured from front of chassis.  
\*\*A minimum ventilation area of 51in<sup>2</sup> (330cm<sup>2</sup>), equivalent to 2" x 22 1/16" 2 5/32" x 24" (55mm x 600mm), is required. For more information, refer to the 'Ventilation' section of this Planning Guide.



----- INDICATES PRODUCT DATUM  
----- INDICATES CABINETRY CLEARANCES

**IMPORTANT NOTE:** Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit [fisherpaykel.com](https://fisherpaykel.com)



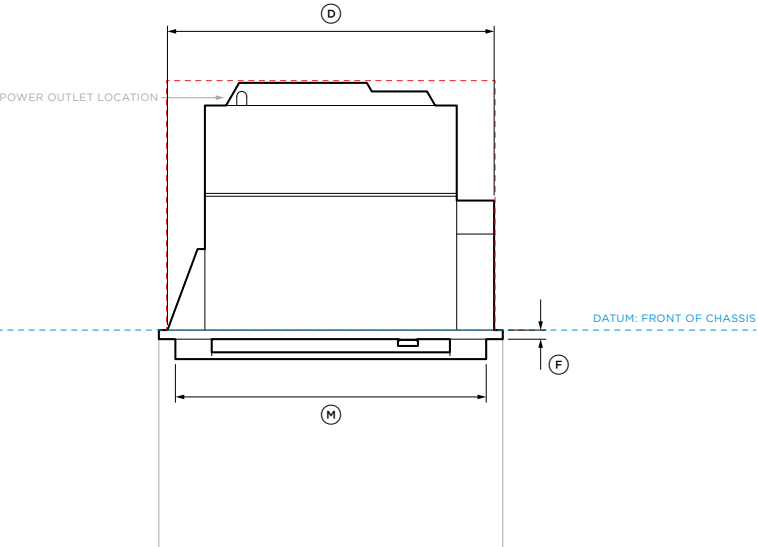

PLAN VIEW

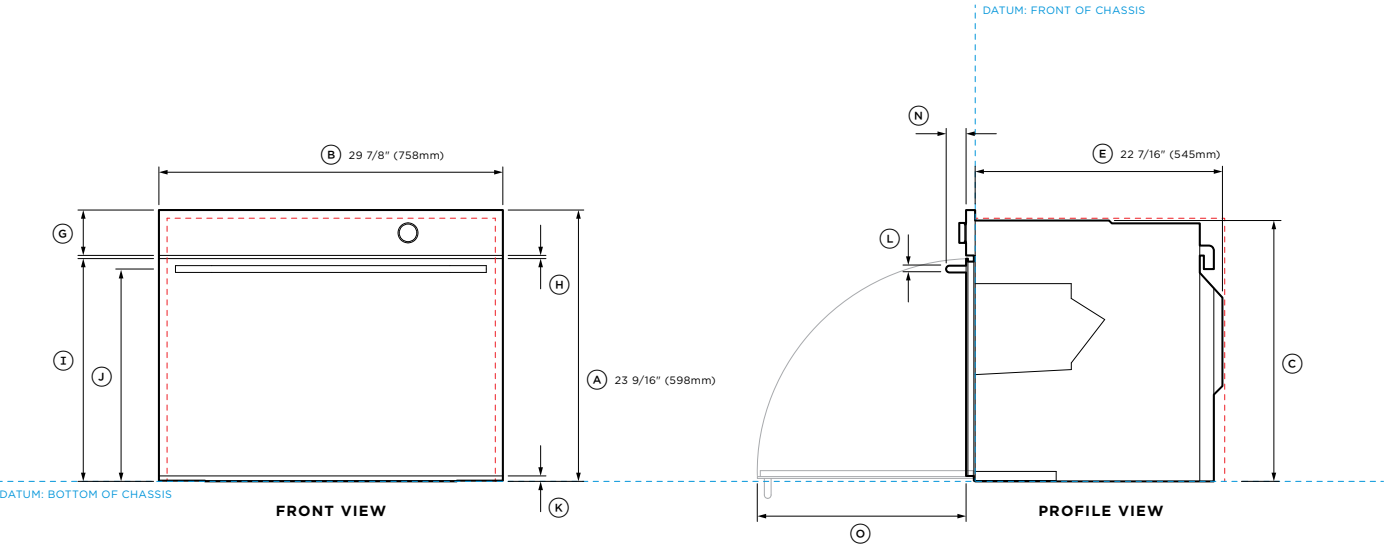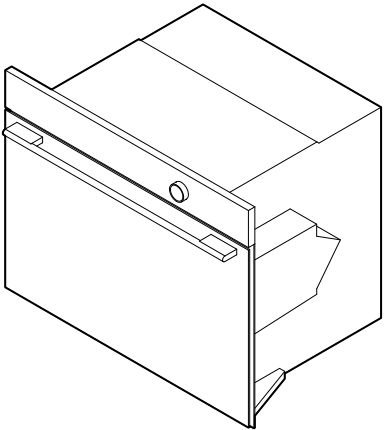

FRONT VIEW

PROFILE VIEW



| Model no:  |                                             |  |
|------------|---------------------------------------------|--|
| OS30SCUDX3 | 30" Series 11 Contemporary Combi-Steam Oven |  |

| Product Dimensions                                      | inch     | mm  |
|---------------------------------------------------------|----------|-----|
| Ⓐ Overall height of product                             | 23 9/16  | 598 |
| Ⓑ Overall width of product                              | 29 7/8   | 758 |
| Ⓒ Height of chassis                                     | 22 5/8   | 575 |
| Ⓓ Width of chassis                                      | 28 3/8   | 720 |
| Ⓔ Depth of chassis                                      | 22 7/16  | 545 |
| Ⓕ Thickness of control panel (excludes handle and dial) | 18 1/8   | 20  |
| Ⓖ Height of control panel                               | 3 15/16  | 100 |
| Ⓗ Gap between door and control panel                    | 9/32     | 7   |
| Ⓘ Height from bottom datum to top of door               | 19 5/16  | 491 |
| ⓵ Height from bottom datum to centerline of handle      | 18 7/16  | 468 |
| Ⓚ Visual gap height                                     | 15/32    | 12  |
| Ⓛ Thickness of handle                                   | 19/32    | 15  |
| Ⓜ Width of handle                                       | 26 31/32 | 685 |
| Ⓝ Depth of handle                                       | 1 3/4    | 44  |
| Ⓞ Depth with door fully open*                           | 18 1/8   | 460 |




\*Measured from front of control panel.

| Minimum Clearances                                                                         | inch     | mm  |
|--------------------------------------------------------------------------------------------|----------|-----|
| Minimum inside height of cavity                                                            | 22 13/16 | 580 |
| Minimum inside width of cavity                                                             | 28 1/2   | 724 |
| Minimum inside depth of cavity*                                                            | 21 5/8   | 550 |
| Minimum clearance above products control panel to upper cabinetry front panel or appliance | 1/16     | 2   |
| Minimum clearance between adjacent front panel or appliance                                | 1/16     | 2   |
| Recommended cabinet height                                                                 | 24       | 600 |
| Recommended cabinet width                                                                  | 30       | 762 |

\*Measured from front of chassis.

----- INDICATES PRODUCT DATUM  
----- INDICATES CABINETRY CLEARANCES

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit [fisherpaykel.com](https://fisherpaykel.com)

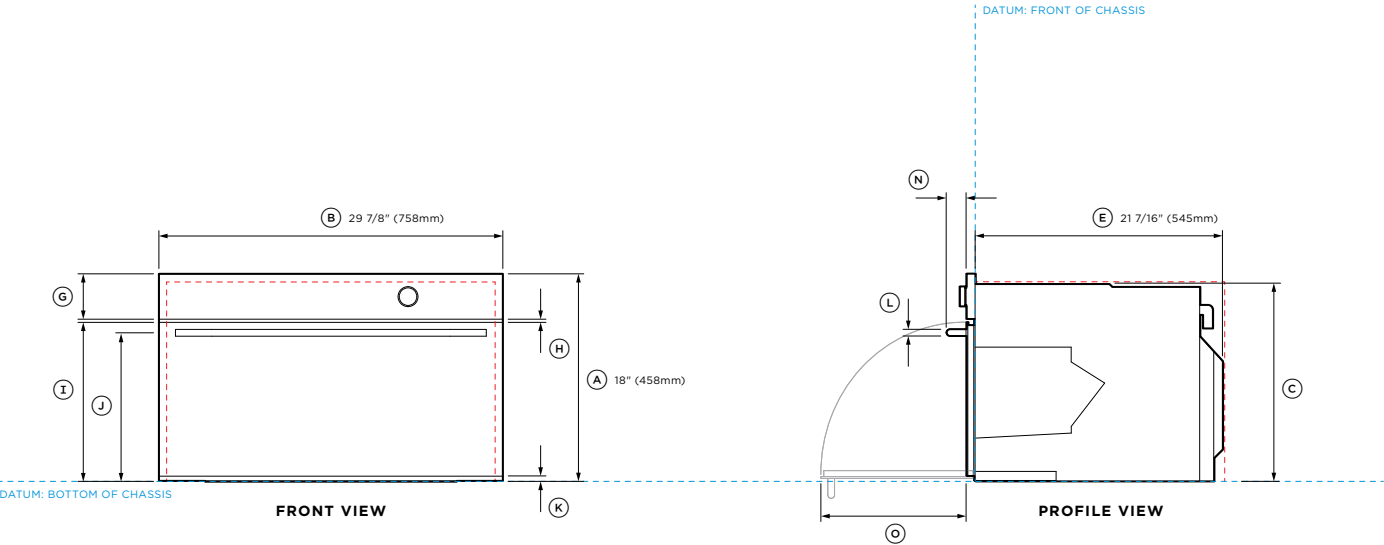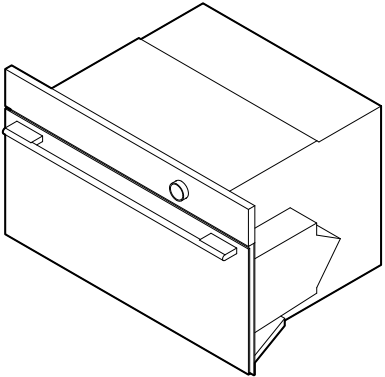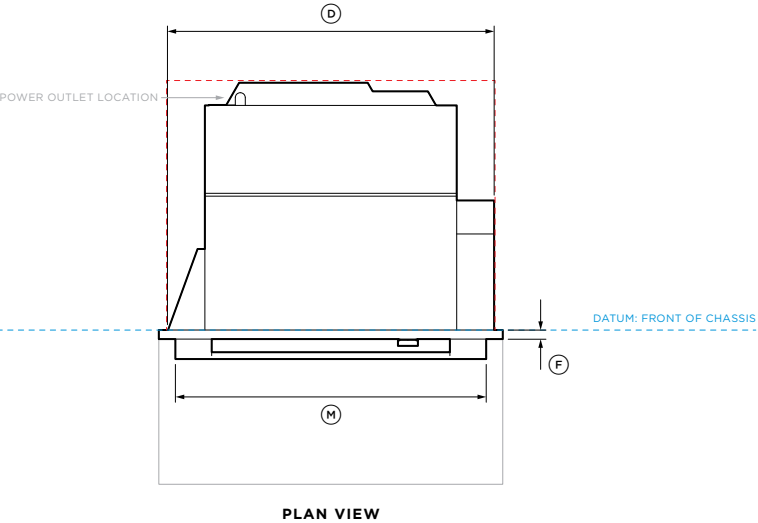

**Model no:**  
OS30NCUDX3 30" Series 9 Contemporary Compact Combi-Steam Oven

| Product Dimensions                                        | inch     | mm  |
|-----------------------------------------------------------|----------|-----|
| (A) Overall height of product                             | 18       | 458 |
| (B) Overall width of product                              | 29 7/8   | 758 |
| (C) Height of chassis                                     | 17 1/8   | 435 |
| (D) Width of chassis                                      | 28 3/8   | 720 |
| (E) Depth of chassis                                      | 21 7/16  | 545 |
| (F) Thickness of control panel (excludes handle and dial) | 13/16    | 20  |
| (G) Height of control panel                               | 3 15/16  | 100 |
| (H) Gap between door and control panel                    | 9/32     | 7   |
| (I) Height from bottom datum to top of door               | 13 13/16 | 351 |
| (J) Height from bottom datum to centerline of handle      | 12 29/32 | 328 |
| (K) Visual gap height                                     | 15/32    | 12  |
| (L) Thickness of handle                                   | 19/32    | 15  |
| (M) Width of handle                                       | 26 31/32 | 685 |
| (N) Depth of handle                                       | 1 3/4    | 44  |
| (O) Depth with door fully open*                           | 12 5/8   | 320 |




\*Measured from front of control panel.

| Minimum Clearances                                                                         | inch    | mm  |
|--------------------------------------------------------------------------------------------|---------|-----|
| Minimum inside height of cavity                                                            | 17 5/16 | 440 |
| Minimum inside width of cavity                                                             | 28 1/2  | 724 |
| Minimum inside depth of cavity*                                                            | 21 5/8  | 550 |
| Minimum clearance above products control panel to upper cabinetry front panel or appliance | 1/16    | 2   |
| Minimum clearance between adjacent front panel or appliance                                | 1/16    | 2   |
| Recommended cabinet height                                                                 | 18 1/8  | 460 |
| Recommended cabinet width                                                                  | 30      | 762 |

\*Measured from front of chassis.

----- INDICATES PRODUCT DATUM  
----- INDICATES CABINETRY CLEARANCES

IMPORTANT NOTE: Throughout this guide, dimensions may vary by  $\pm 2\text{mm}$  (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit [fisherpaykel.com](https://fisherpaykel.com)

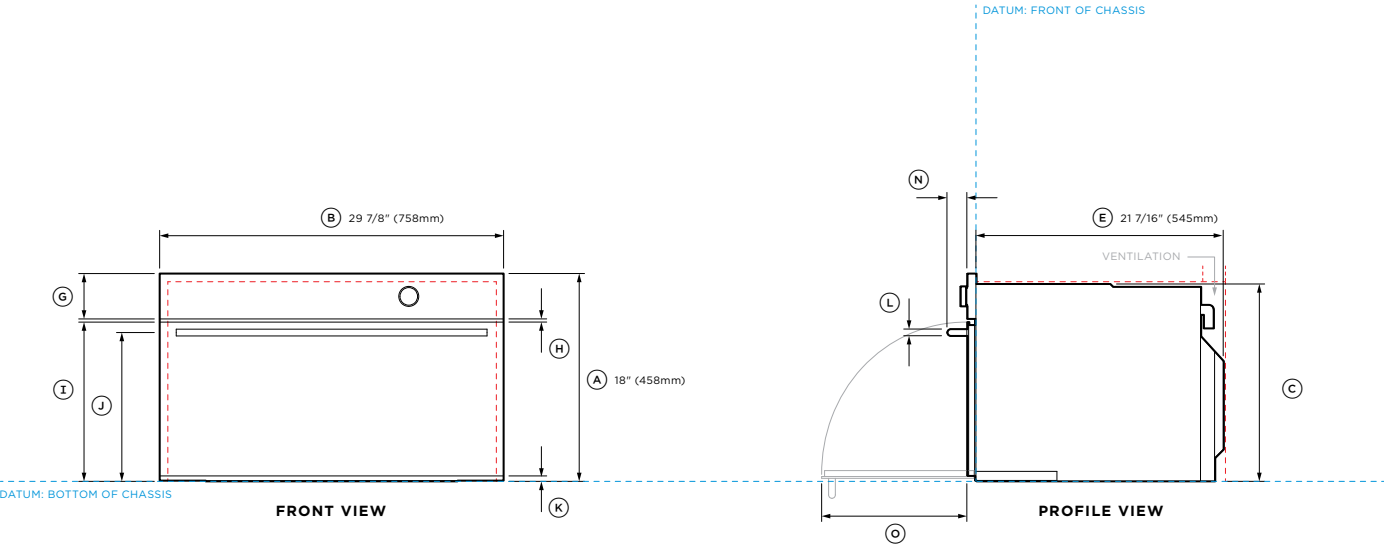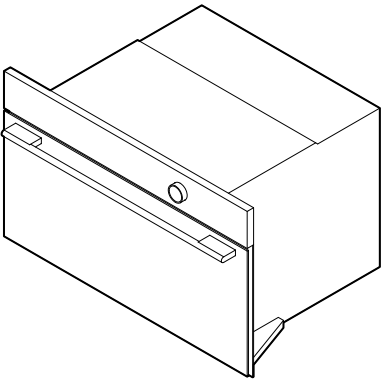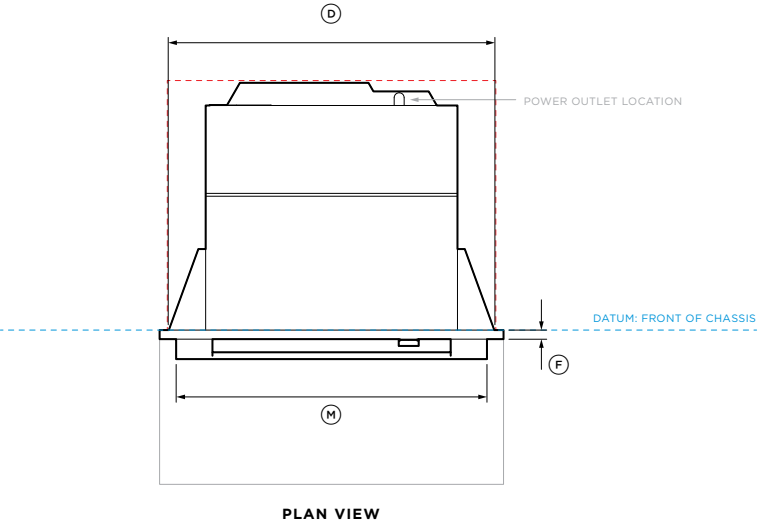

**Model no:**  
OM30NCUDX3 30" Series 9 Contemporary Compact Convection-Speed Oven

| Product Dimensions                                        | inch     | mm  |
|-----------------------------------------------------------|----------|-----|
| (A) Overall height of product                             | 18       | 458 |
| (B) Overall width of product                              | 29 7/8   | 758 |
| (C) Height of chassis                                     | 17 1/8   | 435 |
| (D) Width of chassis                                      | 28 3/8   | 720 |
| (E) Depth of chassis                                      | 21 7/16  | 545 |
| (F) Thickness of control panel (excludes handle and dial) | 13/16    | 20  |
| (G) Height of control panel                               | 3 15/16  | 100 |
| (H) Gap between door and control panel                    | 9/32     | 7   |
| (I) Height from bottom datum to top of door               | 13 13/16 | 351 |
| (J) Height from bottom datum to centerline of handle      | 12 29/32 | 328 |
| (K) Visual gap height                                     | 15/32    | 12  |
| (L) Thickness of handle                                   | 19/32    | 15  |
| (M) Width of handle                                       | 26 31/32 | 685 |
| (N) Depth of handle                                       | 1 3/4    | 44  |
| (O) Depth with door fully open*                           | 12 5/8   | 320 |


\*Measured from front of control panel.

| Minimum Clearances                                                                         | inch    | mm  |
|--------------------------------------------------------------------------------------------|---------|-----|
| Minimum inside height of cavity                                                            | 17 5/16 | 440 |
| Minimum inside width of cavity                                                             | 28 1/2  | 724 |
| Minimum inside depth of cavity*                                                            | 21 5/8  | 550 |
| Rear ventilation height**                                                                  | 2       | 50  |
| Rear ventilation width**                                                                   | 22 1/16 | 560 |
| Minimum clearance above products control panel to upper cabinetry front panel or appliance | 1/16    | 2   |
| Minimum clearance between adjacent front panel or appliance                                | 1/16    | 2   |
| Recommended cabinet height                                                                 | 18 1/8  | 460 |
| Recommended cabinet width                                                                  | 30      | 762 |

\*Measured from front of chassis.  
\*\*A minimum ventilation area of 43.4in<sup>2</sup> (280cm<sup>2</sup>), equivalent to 2" x 22 1/16" (50mm x 560mm), is required. For more information, refer to the 'Ventilation' section of this Planning Guide.


----- INDICATES PRODUCT DATUM  
----- INDICATES CABINETRY CLEARANCES

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit [fisherpaykel.com](https://fisherpaykel.com)



Note: Drawers can fully support 30inch Fisher & Paykel ovens, without adding shelf in between.

IMPORTANT NOTE: Throughout this guide, dimensions may vary by  $\pm 2\text{mm}$  (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit [fisherpaykel.com](http://fisherpaykel.com)

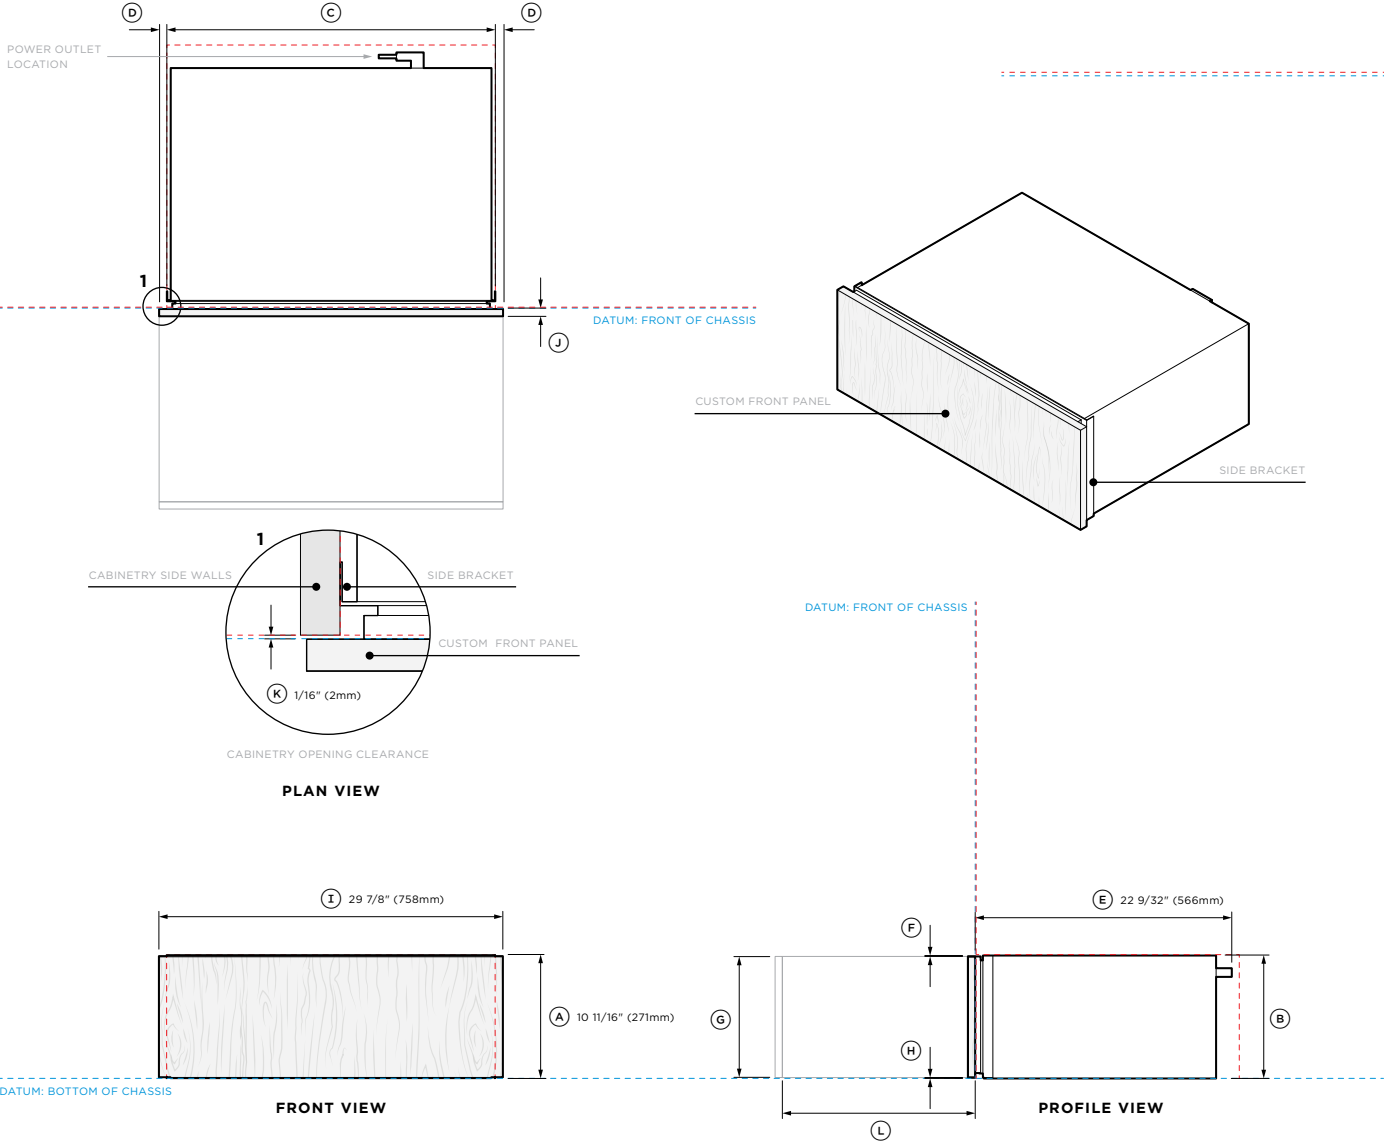

|                                                                     |             |           |
|---------------------------------------------------------------------|-------------|-----------|
| <b>Model no:</b>                                                    |             |           |
| WB30SDEI3 30" Series 9 Integrated Warming Drawer                    |             |           |
| <b>Product Dimensions</b>                                           |             |           |
|                                                                     | <b>inch</b> | <b>mm</b> |
| (A) Overall height of product                                       | 10 11/16    | 271       |
| (B) Height of chassis                                               | 10 11/16    | 271       |
| (C) Width of chassis (including side bracket)                       | 28 15/32    | 723       |
| (D) Distance from side bracket to custom front panel                | 11/16       | 17        |
| (E) Depth of chassis (including power plug)                         | 22 9/32     | 566       |
| (F) Height from top of custom front panel to top of chassis         | 1/16        | 2         |
| (G) Height of custom front panel                                    | min 10 1/2  | min 267   |
| (H) Height from bottom datum to bottom of custom front panel        | 1/16        | 2         |
| (I) Width of custom front panel                                     | min 29 7/8  | min 758   |
| (J) Thickness of custom front panel                                 | min 5/8     | min 16    |
| (K) Clearance behind custom front panel for push-to-open mechanism* | 1/16        | 2         |
| (L) Depth of drawer open**                                          | 16 3/4      | 425       |


\*A clearance of 1/16" (2mm) between the cabinet and the custom front panel is required for the push-to-open mechanism (spacer included).  
\*\*Measured from front of chassis.  
Note: Maximum custom front panel weight 11 lb (5kg).

|                                                                                                |             |           |
|------------------------------------------------------------------------------------------------|-------------|-----------|
| <b>Minimum Clearances</b>                                                                      |             |           |
|                                                                                                | <b>inch</b> | <b>mm</b> |
| Minimum inside height of cavity                                                                | 10 3/4      | 273       |
| Minimum inside width of cavity                                                                 | 28 1/2      | 724       |
| Minimum inside depth of cavity*                                                                | 22 13/16    | 580       |
| Minimum clearance above product custom front panel to upper cabinetry front panel or appliance | 1/16        | 2         |
| Minimum clearance between adjacent front panel or appliance                                    | 1/16        | 2         |
| Recommended cabinet height                                                                     | 10 3/4      | 273       |
| Recommended cabinet width                                                                      | 30          | 762       |


\*Measured from front of chassis.  
Note: Drawers can fully support 30inch Fisher & Paykel ovens, without adding shelf in between.

----- INDICATES PRODUCT DATUM  
----- INDICATES CABINETY CLEARANCES

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit [fisherpaykel.com](https://fisherpaykel.com)

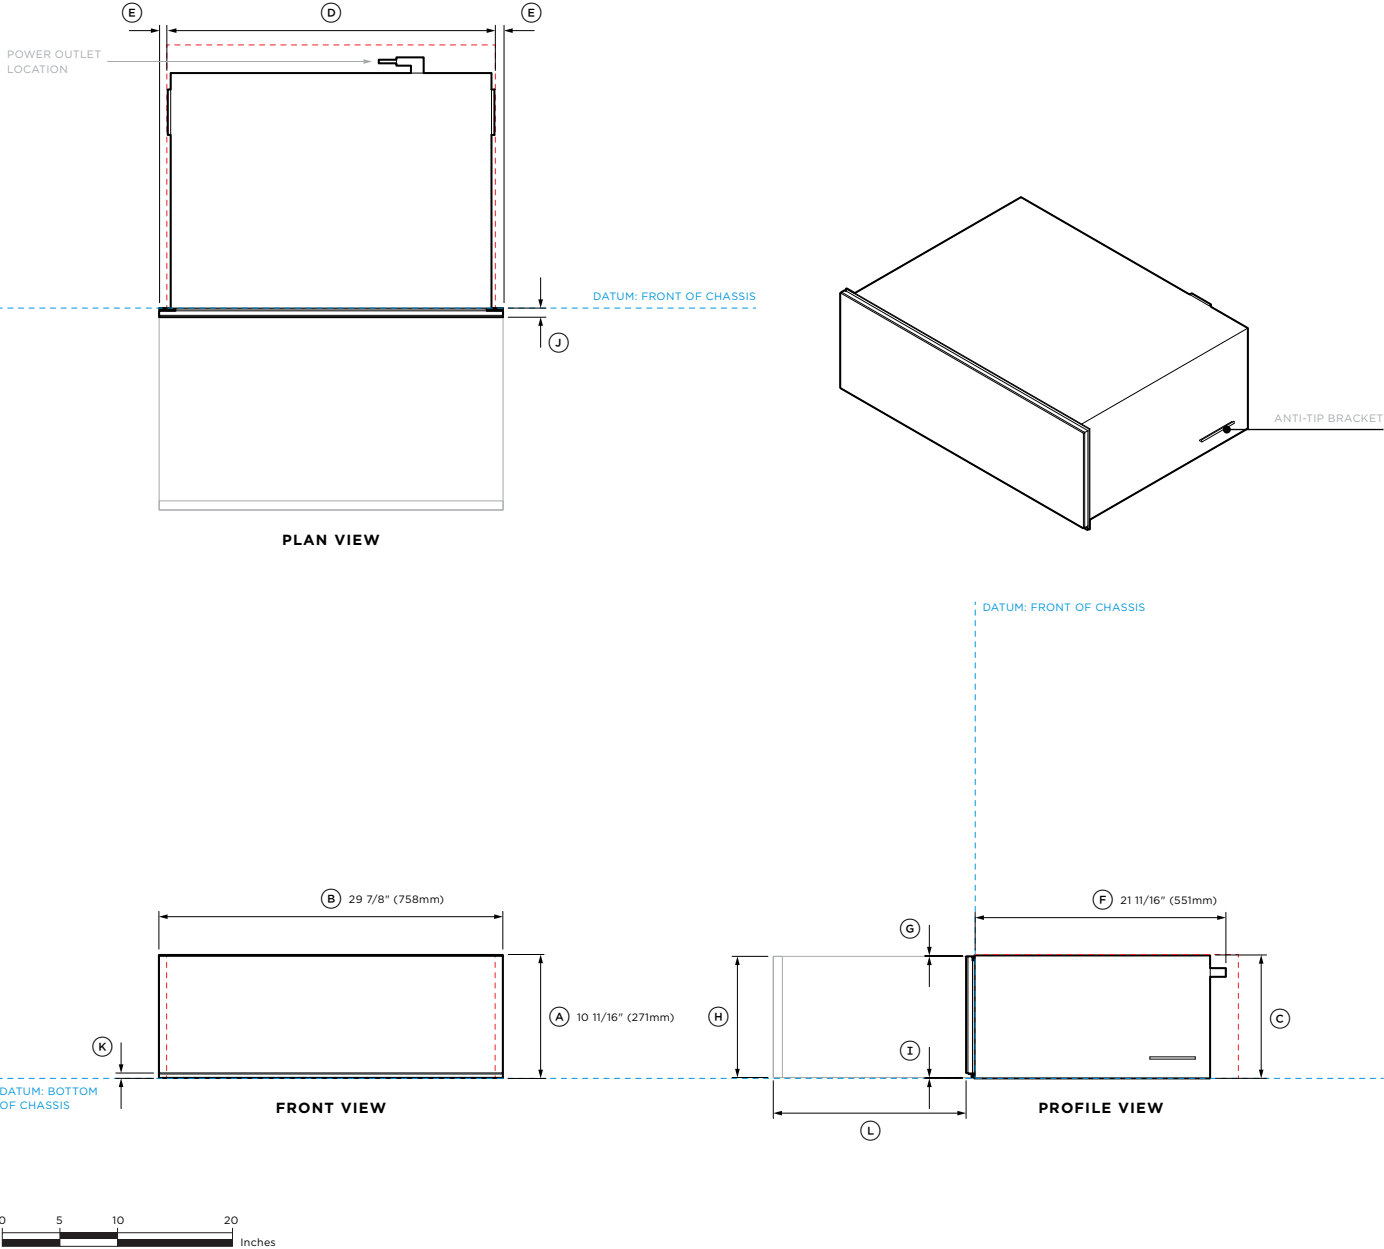

|                                                                                                                                                                                                                                                                                       |             |           |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|-----------|
| <b>Model no:</b>                                                                                                                                                                                                                                                                      |             |           |
| VB30SCX3 30" Series 9 Contemporary Vacuum Seal Drawer                                                                                                                                                                                                                                 |             |           |
| <b>Product Dimensions</b>                                                                                                                                                                                                                                                             |             |           |
|                                                                                                                                                                                                                                                                                       | <b>inch</b> | <b>mm</b> |
| (A) Overall height of product                                                                                                                                                                                                                                                         | 10 11/16    | 271       |
| (B) Overall width of product                                                                                                                                                                                                                                                          | 29 7/8      | 758       |
| (C) Height of chassis                                                                                                                                                                                                                                                                 | 10 11/16    | 271       |
| (D) Width of chassis*                                                                                                                                                                                                                                                                 | 27 3/4      | 704       |
| (E) Distance from side of chassis to front panel                                                                                                                                                                                                                                      | 11/16       | 17        |
| (F) Depth of chassis (including power plug)                                                                                                                                                                                                                                           | 21 11/16    | 551       |
| (G) Height from top of front panel to top of chassis                                                                                                                                                                                                                                  | 1/16        | 2         |
| (H) Height of front panel                                                                                                                                                                                                                                                             | 10 1/2      | 267       |
| (I) Height from bottom datum to bottom of front panel                                                                                                                                                                                                                                 | 1/16        | 2         |
| (J) Thickness of front panel                                                                                                                                                                                                                                                          | 13/16       | 20        |
| (K) Visual gap height                                                                                                                                                                                                                                                                 | 15/32       | 12        |
| (L) Depth of drawer open**                                                                                                                                                                                                                                                            | 16 3/4      | 425       |
| *Including anti-tip brackets.<br>**Measured from front of front panel.                                                                                                                                                                                                                |             |           |
| <b>Minimum Clearances</b>                                                                                                                                                                                                                                                             |             |           |
|                                                                                                                                                                                                                                                                                       | <b>inch</b> | <b>mm</b> |
| Minimum inside height of cavity                                                                                                                                                                                                                                                       | 10 3/4      | 273       |
| Minimum inside width of cavity*                                                                                                                                                                                                                                                       | 28 1/2      | 724       |
| Minimum inside depth of cavity**                                                                                                                                                                                                                                                      | 22 13/16    | 580       |
| Minimum clearance above products front panel to upper cabinetry front panel or appliance***                                                                                                                                                                                           | 5/32        | 4         |
| Minimum clearance between adjacent front panel or appliance                                                                                                                                                                                                                           | 1/16        | 2         |
| Recommended cabinet height                                                                                                                                                                                                                                                            | 10 3/4      | 273       |
| Recommended cabinet width                                                                                                                                                                                                                                                             | 30          | 762       |
| *Including anti-tip brackets.<br>**Measured from front of chassis.<br>***Achieve a smaller gap between product front panel to upper cabinetry front panel by dropping cabinetry front panel down.                                                                                     |             |           |
| Note: Drawers can fully support 30inch Fisher & Paykel ovens, without adding shelf in between.                                                                                                                                                                                        |             |           |
| ----- INDICATES PRODUCT DATUM<br>----- INDICATES CABINETRY CLEARANCES                                                                                                                                                                                                                 |             |           |
| IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit <a href="https://fisherpaykel.com">fisherpaykel.com</a> |             |           |

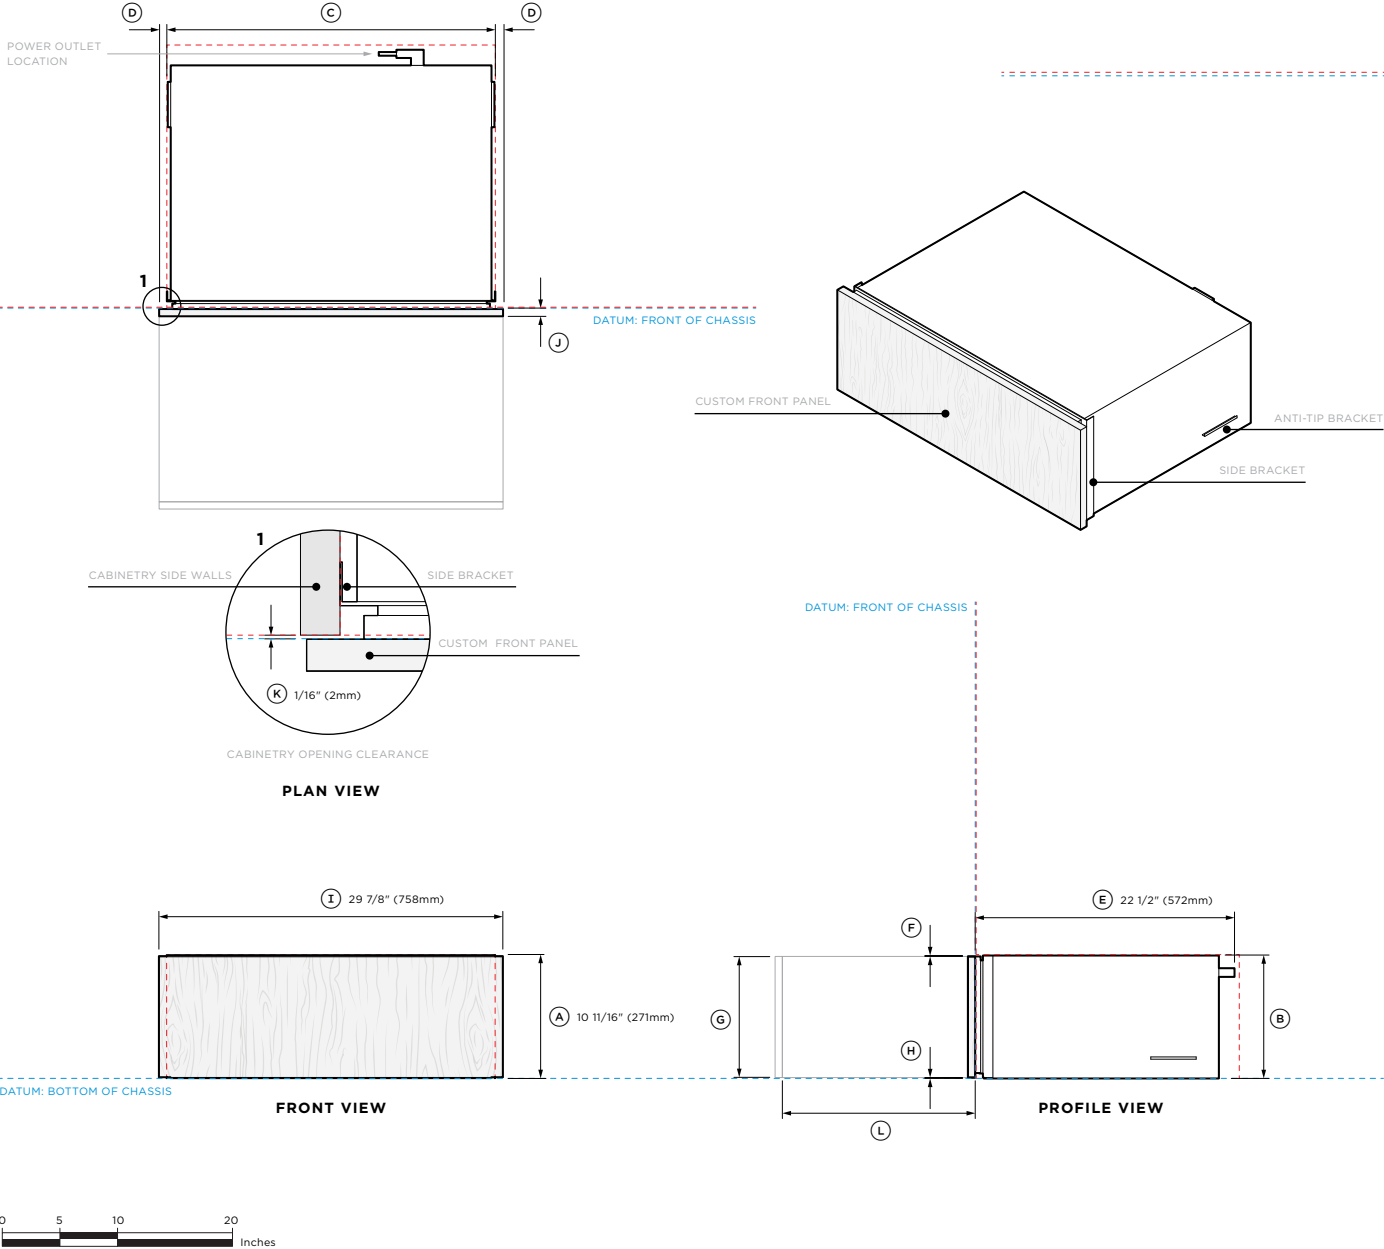

|                                                                                                                                                                                                                                                                                       |             |           |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|-----------|
| <b>Model no:</b>                                                                                                                                                                                                                                                                      |             |           |
| VB30SDEI3 30" Series 9 Integrated Vacuum Seal Drawer                                                                                                                                                                                                                                  |             |           |
| <b>Product Dimensions</b>                                                                                                                                                                                                                                                             |             |           |
|                                                                                                                                                                                                                                                                                       | <b>inch</b> | <b>mm</b> |
| (A) Overall height of product                                                                                                                                                                                                                                                         | 10 11/16    | 271       |
| (B) Height of chassis                                                                                                                                                                                                                                                                 | 10 11/16    | 271       |
| (C) Width of chassis (including side bracket)*                                                                                                                                                                                                                                        | 28 15/32    | 723       |
| (D) Distance from side bracket to custom front panel                                                                                                                                                                                                                                  | 11/16       | 17        |
| (E) Depth of chassis (including power plug)                                                                                                                                                                                                                                           | 22 1/2      | 572       |
| (F) Height from top of custom front panel to top of chassis                                                                                                                                                                                                                           | 1/16        | 2         |
| (G) Height of custom front panel                                                                                                                                                                                                                                                      | min 10 1/2  | min 267   |
| (H) Height from bottom datum to bottom of custom front panel                                                                                                                                                                                                                          | 1/16        | 2         |
| (I) Width of custom front panel                                                                                                                                                                                                                                                       | min 29 7/8  | min 758   |
| (J) Thickness of custom front panel                                                                                                                                                                                                                                                   | min 5/8     | min 16    |
| (K) Clearance behind custom front panel for push-to-open mechanism**                                                                                                                                                                                                                  | 1/16        | 2         |
| (L) Depth of drawer open***                                                                                                                                                                                                                                                           | 16 3/4      | 425       |
| *Including anti-tip brackets.<br>**A clearance of 1/16" (2mm) between the cabinet and the custom front panel is required for the push-to-open mechanism (spacer included).<br>***Measured from front of chassis.<br>Note: Maximum custom front panel weight 11 lb (5kg).              |             |           |
| <b>Minimum Clearances</b>                                                                                                                                                                                                                                                             |             |           |
|                                                                                                                                                                                                                                                                                       | <b>inch</b> | <b>mm</b> |
| Minimum inside height of cavity                                                                                                                                                                                                                                                       | 10 3/4      | 273       |
| Minimum inside width of cavity*                                                                                                                                                                                                                                                       | 28 1/2      | 724       |
| Minimum inside depth of cavity**                                                                                                                                                                                                                                                      | 22 13/16    | 580       |
| Minimum clearance above product custom front panel to upper cabinetry front panel or appliance                                                                                                                                                                                        | 1/16        | 2         |
| Minimum clearance between adjacent front panel or appliance                                                                                                                                                                                                                           | 1/16        | 2         |
| Recommended cabinet height                                                                                                                                                                                                                                                            | 10 3/4      | 273       |
| Recommended cabinet width                                                                                                                                                                                                                                                             | 30          | 762       |
| *Including anti-tip brackets.<br>**Measured from front of chassis.<br>Note: Drawers can fully support 30inch Fisher & Paykel ovens, without adding shelf in between.                                                                                                                  |             |           |
| ----- INDICATES PRODUCT DATUM<br>----- INDICATES CABINETRY CLEARANCES                                                                                                                                                                                                                 |             |           |
| IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit <a href="https://fisherpaykel.com">fisherpaykel.com</a> |             |           |

## PLANNING CONSIDERATIONS



DIVIDING SHELF

If the appliance front panel is thicker than the cabinetry front panel, adjust the dividing shelf depth to ensure the oven sits flush with the front of the cabinetry.

BLACK CLASHING




Black clashing is recommended on front facing edges and openings where products are located and on side cabinets if cabinet is rebated.

OVEN CABINETRY TRIM

If using light-colored cabinets, we recommend using black cabinetry trim to help hide the cabinetry beneath the front door panel of the appliance. Ensure the trim height does not interfere with any appliances or cabinetry below. Black cabinetry trim is included with ovens.

LEVEL CABINETRY


Check the shelves are level and the side panels are straight.

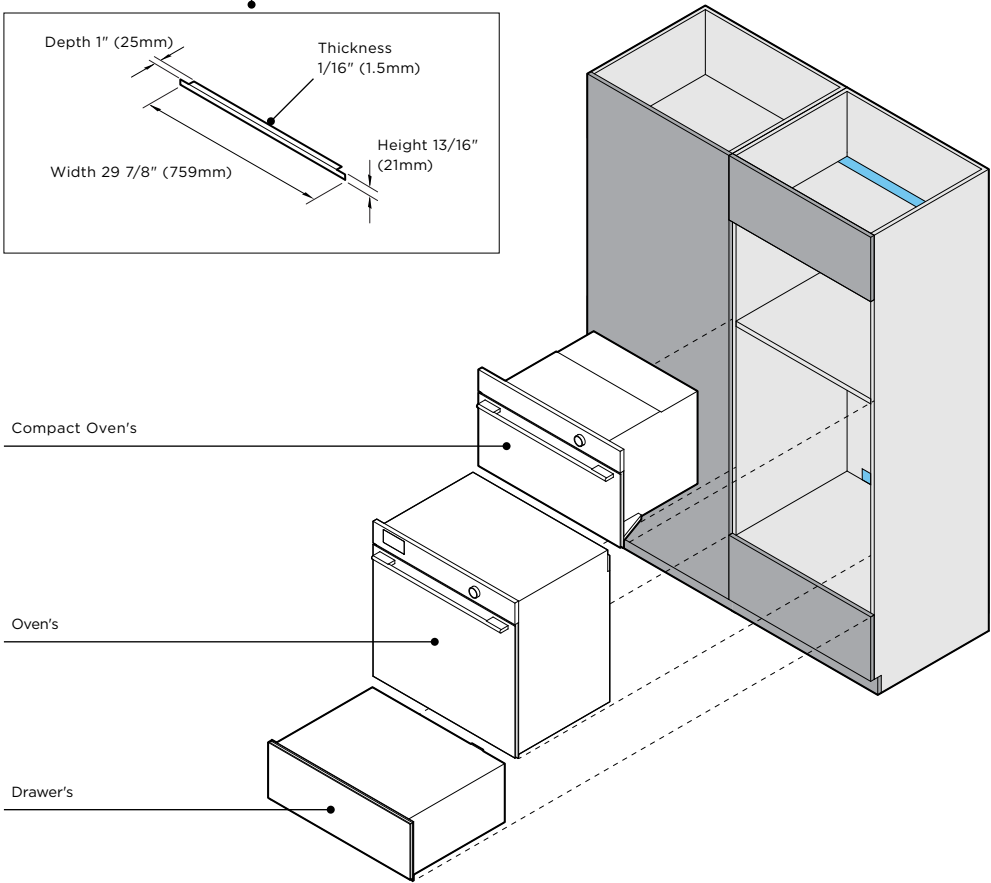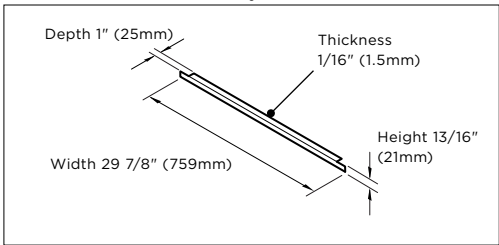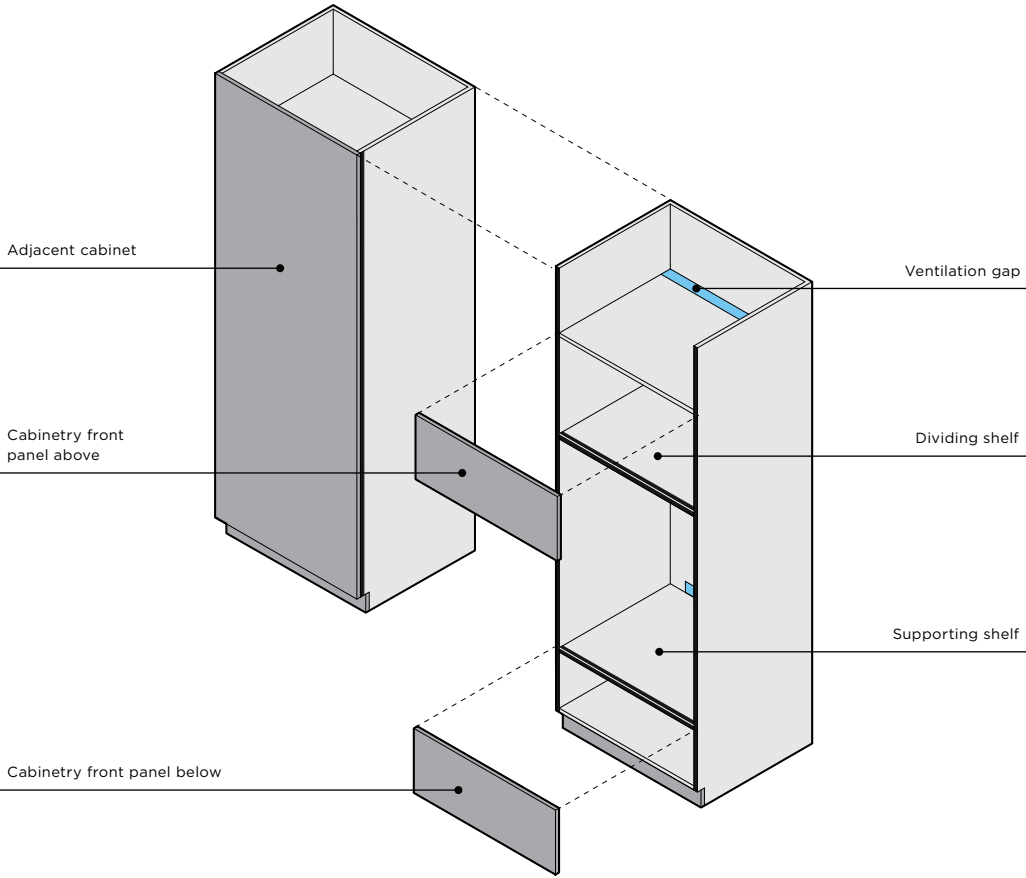

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://www.fisherpaykel.com)


**UNDERBENCH**

If installing a cooktop above the oven, ensure adequate clearance is provided for the cooktop as per the cooktop manufacturer's instructions.

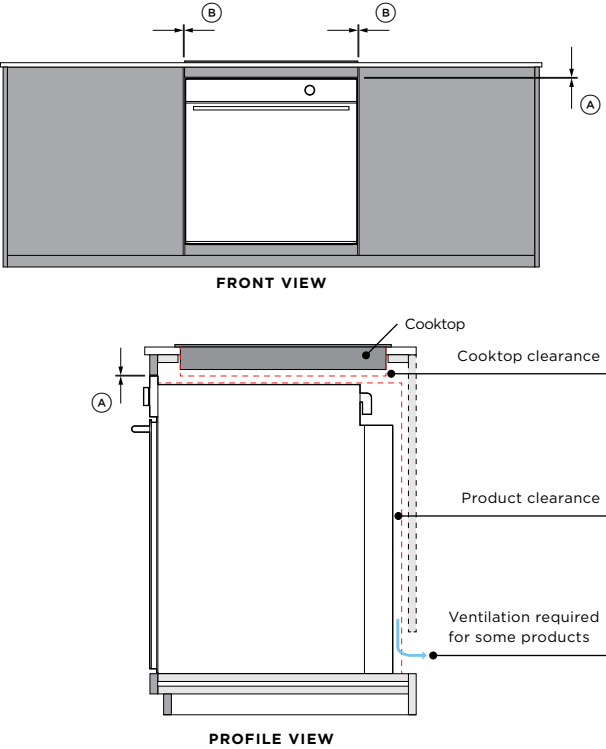


**SINGLE INSTALLATION**

Head to the individual product 'Cabinetry' section in this Planning Guide for details.

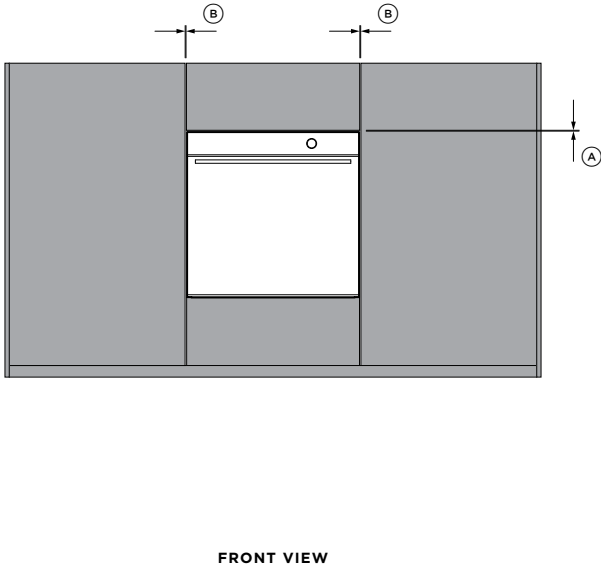


**STACKED OR GRID**

Head to the 'Stack Height' section in this Planning Guide for details.

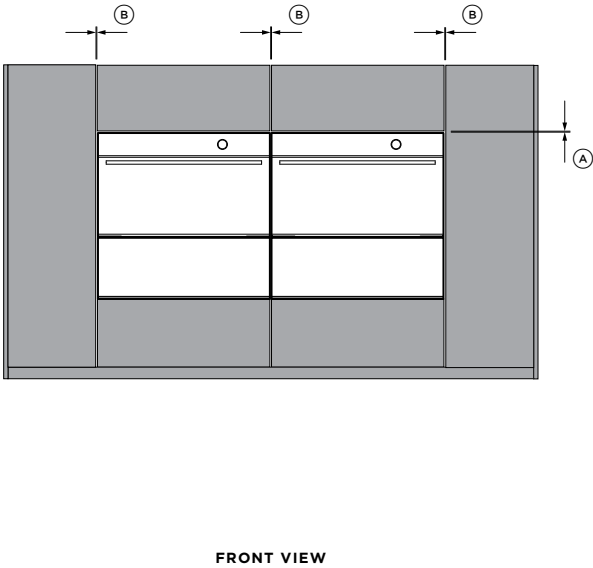

| Clearances |                                                                                                       | inch | mm |
|------------|-------------------------------------------------------------------------------------------------------|------|----|
| (A)        | Minimum clearance above product control panel/front panel to upper cabinetry front panel or appliance | 1/16 | 2  |
| (B)        | Minimum clearance between adjacent front panel or appliance                                           | 1/16 | 2  |

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://fisherpaykel.com)

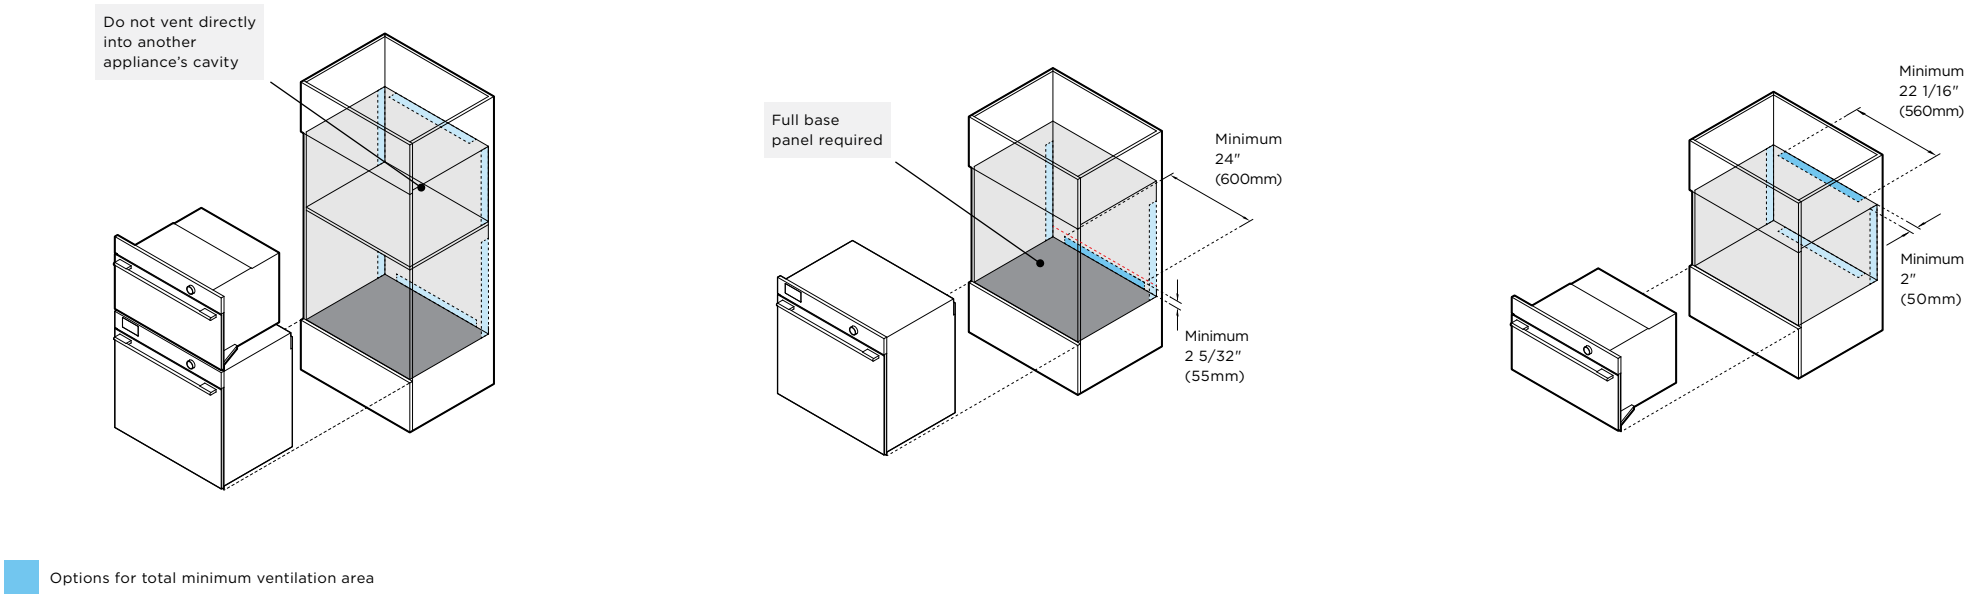

VENTILATION

Ventilation is required to ensure proper performance of certain products.

Possible Venting Locations:

- Space behind the cabinet
- Upper cavity (not a product cavity)
- Toe kick cavity
- Adjacent cabinetry (not a product cavity)

Cabinet with back panel or installed against a wall:

Select one of the venting locations listed above, providing the required minimum ventilation area.

Cabinet without back panel:

If the cabinet is manufactured without a back panel and is not positioned directly against a wall, the open back will provide sufficient ventilation.

Do not vent directly into another appliance's cavity.

SELF-CLEANING OVEN AND  
SELF-CLEANING STEAM ASSIST OVEN

OB30SCPUDX3, OB30SCPSUDX

VENTILATION PLACEMENT

|                                |                                         |
|--------------------------------|-----------------------------------------|
|                                | 51in <sup>2</sup> (330cm <sup>2</sup> ) |
|                                | or                                      |
| Total minimum ventilation area | 2 5/32" x 24"                           |
|                                | (55mm x 600mm)                          |

|                         |               |
|-------------------------|---------------|
| Cavity venting options* | sides or back |
|-------------------------|---------------|

\*If positioned at the back, it should be located no more than 3 5/32" (80mm) above the bottom of the chassis datum.

Note: Full base panel required for product to operate correctly. Venting can not be through the base panel.

COMPACT CONVECTION-SPEED OVEN

OM30NCUDX3

VENTILATION PLACEMENT

|                                |                                           |
|--------------------------------|-------------------------------------------|
|                                | 43.4in <sup>2</sup> (280cm <sup>2</sup> ) |
|                                | or                                        |
| Total minimum ventilation area | 2" x 22 1/16"                             |
|                                | (50mm x 560mm)                            |

|                        |                    |
|------------------------|--------------------|
| Cavity venting options | base, sides or top |
|------------------------|--------------------|

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://fisherpaykel.com)

STACK HEIGHT

Stack height is overall product height with minimum clearance above appliance control panel or front panel.

A Overall product height


+

B Minimum clearance above appliance control panel or front panel to upper appliance


=

C Stacked Height

1



PROFILE VIEW

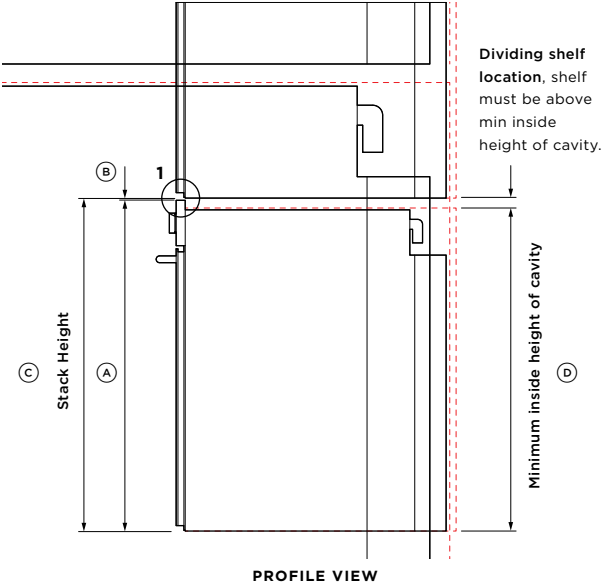


Dividing shelf location, shelf must be above min inside height of cavity.

**Ventilation** air vent is required at rear of cabinetry for some products.

**Dividing shelves** are required to support stacked appliances and to achieve correct clearance.

**Dividing shelves** must be constructed from material that will support the weight of the appliances. Ensure the oven is not bearing any weight from cabinetry or products installed above.


**Drawers** can fully support a 30inch Fisher & Paykel oven, without adding a shelf in between.

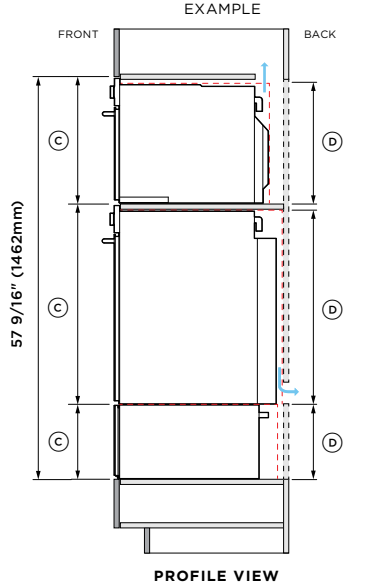

EXAMPLE

57 9/16" (1462mm)

PROFILE VIEW

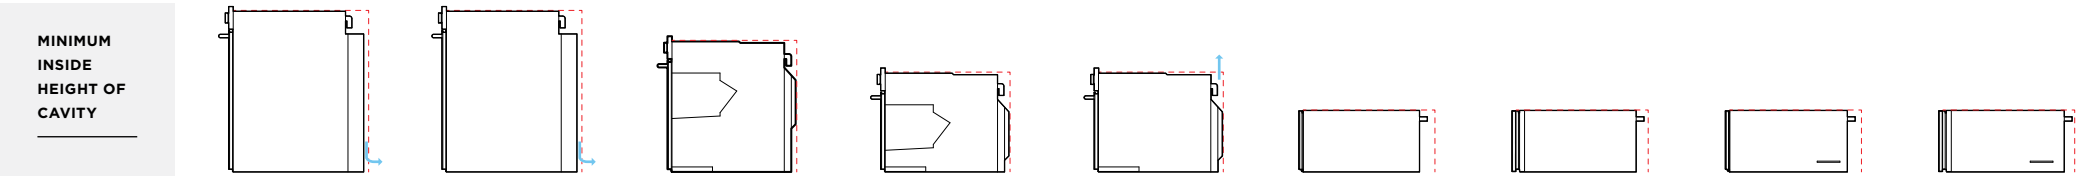

MINIMUM INSIDE HEIGHT OF CAVITY

|                                   | SELF-CLEANING OVEN<br>OB30SCPUDX3 |     | SELF-CLEANING STEAM ASSIST OVEN<br>OB30SCPSUDX3 |     | COMBI-STEAM OVEN<br>OS30SCUDX3 |     | COMPACT COMBI-STEAM OVEN<br>OS30NCUDX3 |     | COMPACT CONVECTION-SPEED OVEN<br>OM30NCUDX3 |     | WARMING DRAWER<br>WB30SCX3 |      | INTEGRATED WARMING DRAWER<br>WB30SDEI3 |      | VACUUM SEAL DRAWER<br>VB30SCX3 |      | INTEGRATED VACUUM SEAL DRAWER<br>VB30SDEI3 |      |
|-----------------------------------|-----------------------------------|-----|-------------------------------------------------|-----|--------------------------------|-----|----------------------------------------|-----|---------------------------------------------|-----|----------------------------|------|----------------------------------------|------|--------------------------------|------|--------------------------------------------|------|
| DIMENSIONS                        | inch                              | mm  | inch                                            | mm  | inch                           | mm  | inch                                   | mm  | inch                                        | mm  | inch                       | mm   | inch                                   | mm   | inch                           | mm   | inch                                       | mm   |
| A Overall product height          | 28 11/16                          | 729 | 28 11/16                                        | 729 | 23 9/16                        | 598 | 18                                     | 458 | 18                                          | 458 | 10 11/16                   | 271  | 10 11/16                               | 271  | 10 11/16                       | 271  | 10 11/16                                   | 271  |
| B Minimum clearance above         | 1/16                              | 2   | 1/16                                            | 2   | 1/16                           | 2   | 1/16                                   | 2   | 1/16                                        | 2   | -                          | -    | -                                      | -    | -                              | -    | -                                          | -    |
| C Stack height                    | 28 3/4                            | 731 | 28 3/4                                          | 731 | 24                             | 600 | 18 1/8                                 | 460 | 18 1/8                                      | 460 | 10 11/16*                  | 271* | 10 11/16*                              | 271* | 10 11/16*                      | 271* | 10 11/16*                                  | 271* |
| D Minimum inside height of cavity | 28 1/32                           | 712 | 28 1/32                                         | 712 | 22 13/16                       | 580 | 17 5/16                                | 440 | 17 5/16                                     | 440 | -                          | -    | -                                      | -    | -                              | -    | -                                          | -    |

\*Drawers can fully support 30inch Fisher & Paykel wall oven, without adding shelf in between. Note: Single installation of Drawers require minimum clearance above, head to individual product 'Cabinetry' section's of this Planning Guide for more details.

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://fisherpaykel.com)

FISHER & PAYKEL

90004606C

PLANNING GUIDE 30" OVENS AND COMPANIONS VERSION C - OCTOBER 2025

© FISHER & PAYKEL APPLIANCES LIMITED 2025

PAGE 36

Model no:  
OB30SCPUDX3     30" Series 9 Contemporary Self-Cleaning Oven

| Product Dimensions                                        | inch     | mm  |
|-----------------------------------------------------------|----------|-----|
| (A) Overall height of product                             | 28 11/16 | 729 |
| (B) Overall width of product                              | 29 7/8   | 758 |
| (C) Thickness of control panel (excludes handle and dial) | 13/16    | 20  |


| Cabinetry Dimensions                        | inch      | mm    |
|---------------------------------------------|-----------|-------|
| (D) Recommended cabinet height/stack height | 28 3/4    | 731   |
| (E) Recommended cabinet width               | 30        | 762   |
| (F) Minimum inside height of cavity         | 28 1/32   | 712   |
| (G) Minimum inside width of cavity          | 28 1/2    | 724   |
| (H) Minimum inside depth of cavity*         | 23 1/2    | 597   |
| (I) Thickness of cabinetry front panel      | 5/8-13/16 | 16-20 |
| Rear ventilation height**                   | 2 5/32    | 55    |
| Rear ventilation width**                    | 24        | 600   |

\*Measured from front of chassis.  
\*\*A minimum ventilation area of 51in<sup>2</sup> (330cm<sup>2</sup>), equivalent to 2" x 22 1/16" 2 5/32" x 24" (55mm x 600mm), is required. For more information, refer to the 'Ventilation' section of this Planning Guide.

Note: Cabinetry requires a full base panel.

| Cabinetry clearances                                                                          | inch | mm |
|-----------------------------------------------------------------------------------------------|------|----|
| (J) Minimum clearance between adjacent front panel or appliance                               | 1/16 | 2  |
| (K) Minimum clearance above product control panel to upper cabinetry front panel or appliance | 1/16 | 2  |

Note: If installing a cooktop above the oven, ensure adequate clearance is provided for the cooktop as per the cooktop manufacturer's instructions.

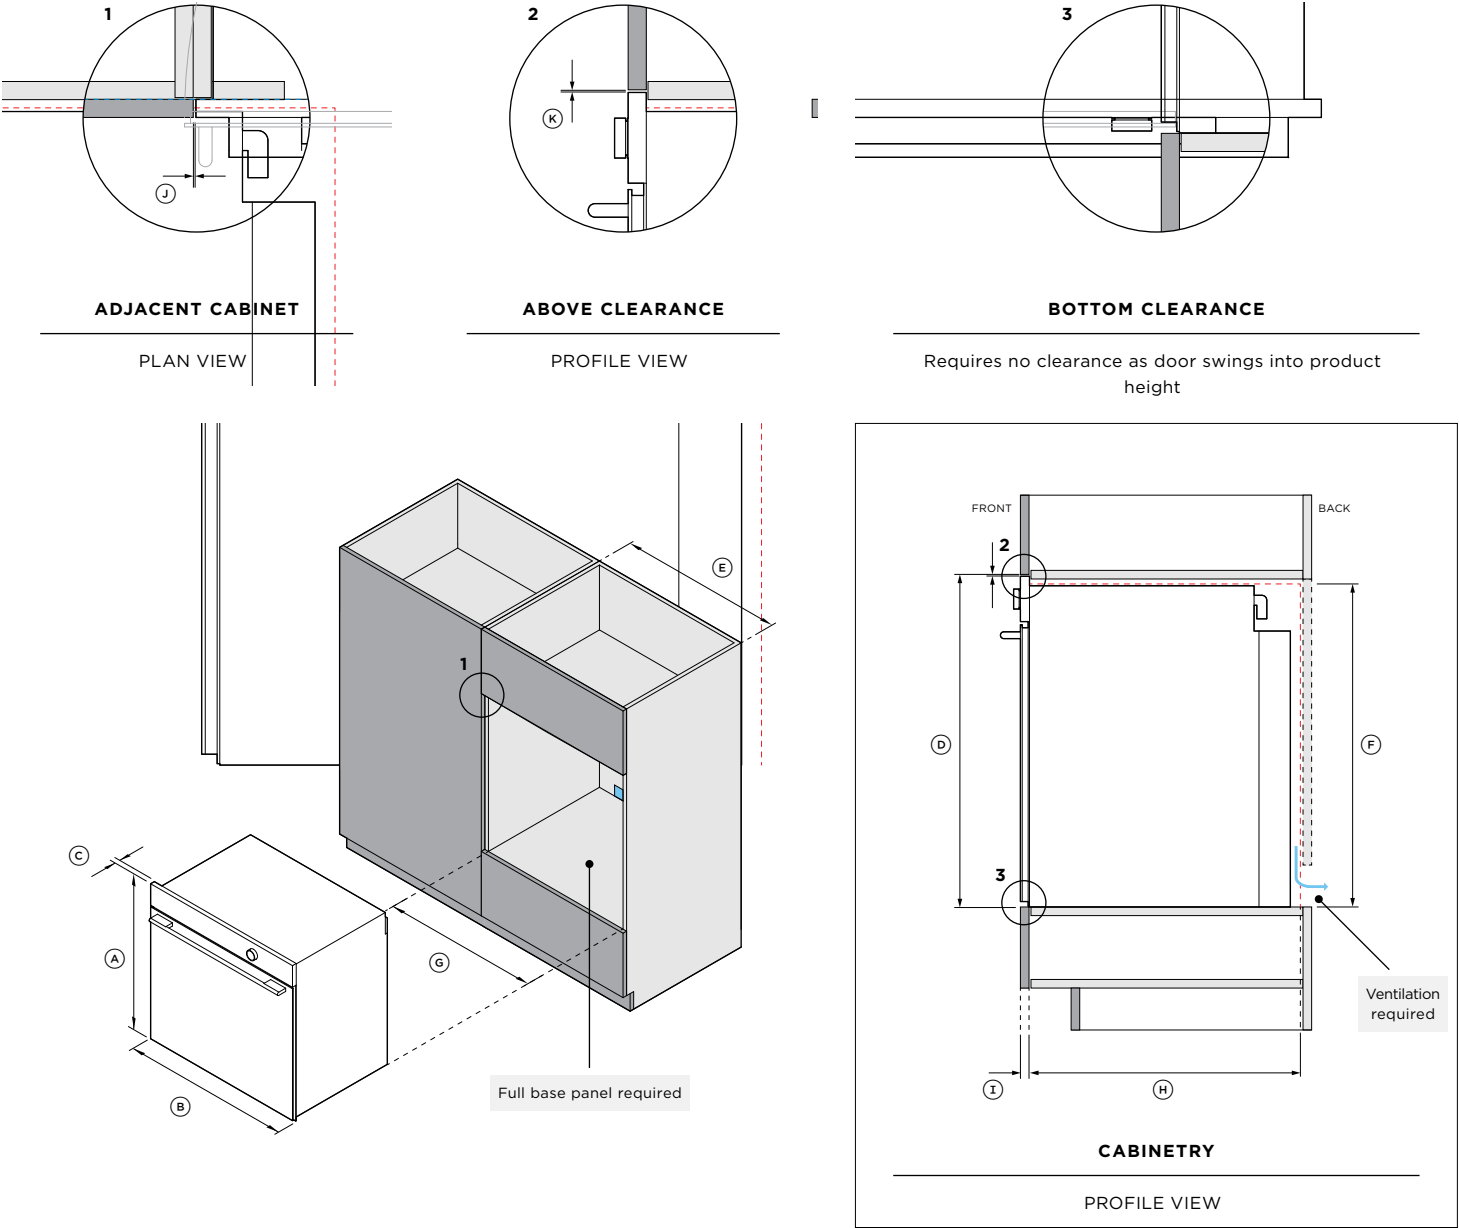

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

**Model no:**  
OB30SCPSUDX3    30" Series 11 Contemporary Self-Cleaning Steam Assist Oven

| Product Dimensions                                      | inch     | mm  |
|---------------------------------------------------------|----------|-----|
| A Overall height of product                             | 28 11/16 | 729 |
| B Overall width of product                              | 29 7/8   | 758 |
| C Thickness of control panel (excludes handle and dial) | 13/16    | 20  |


| Cabinetry Dimensions                      | inch      | mm    |
|-------------------------------------------|-----------|-------|
| D Recommended cabinet height/stack height | 28 3/4    | 731   |
| E Recommended cabinet width               | 30        | 762   |
| F Minimum inside height of cavity         | 28 1/32   | 712   |
| G Minimum inside width of cavity          | 28 1/2    | 724   |
| H Minimum inside depth of cavity*         | 23 1/2    | 597   |
| I Thickness of cabinetry front panel      | 5/8-13/16 | 16-20 |
| Rear ventilation height**                 | 2 5/32    | 55    |
| Rear ventilation width**                  | 24        | 600   |

\*Measured from front of chassis.  
\*\*A minimum ventilation area of 51in<sup>2</sup> (330cm<sup>2</sup>), equivalent to 2" x 22 1/16" 2 5/32" x 24" (55mm x 600mm), is required. For more information, refer to the 'Ventilation' section of this Planning Guide.

Note: Cabinetry requires a full base panel.

| Cabinetry clearances                                                                        | inch | mm |
|---------------------------------------------------------------------------------------------|------|----|
| J Minimum clearance between adjacent front panel or appliance                               | 1/16 | 2  |
| K Minimum clearance above product control panel to upper cabinetry front panel or appliance | 1/16 | 2  |

Note: If installing a cooktop above the oven, ensure adequate clearance is provided for the cooktop as per the cooktop manufacturer's instructions.

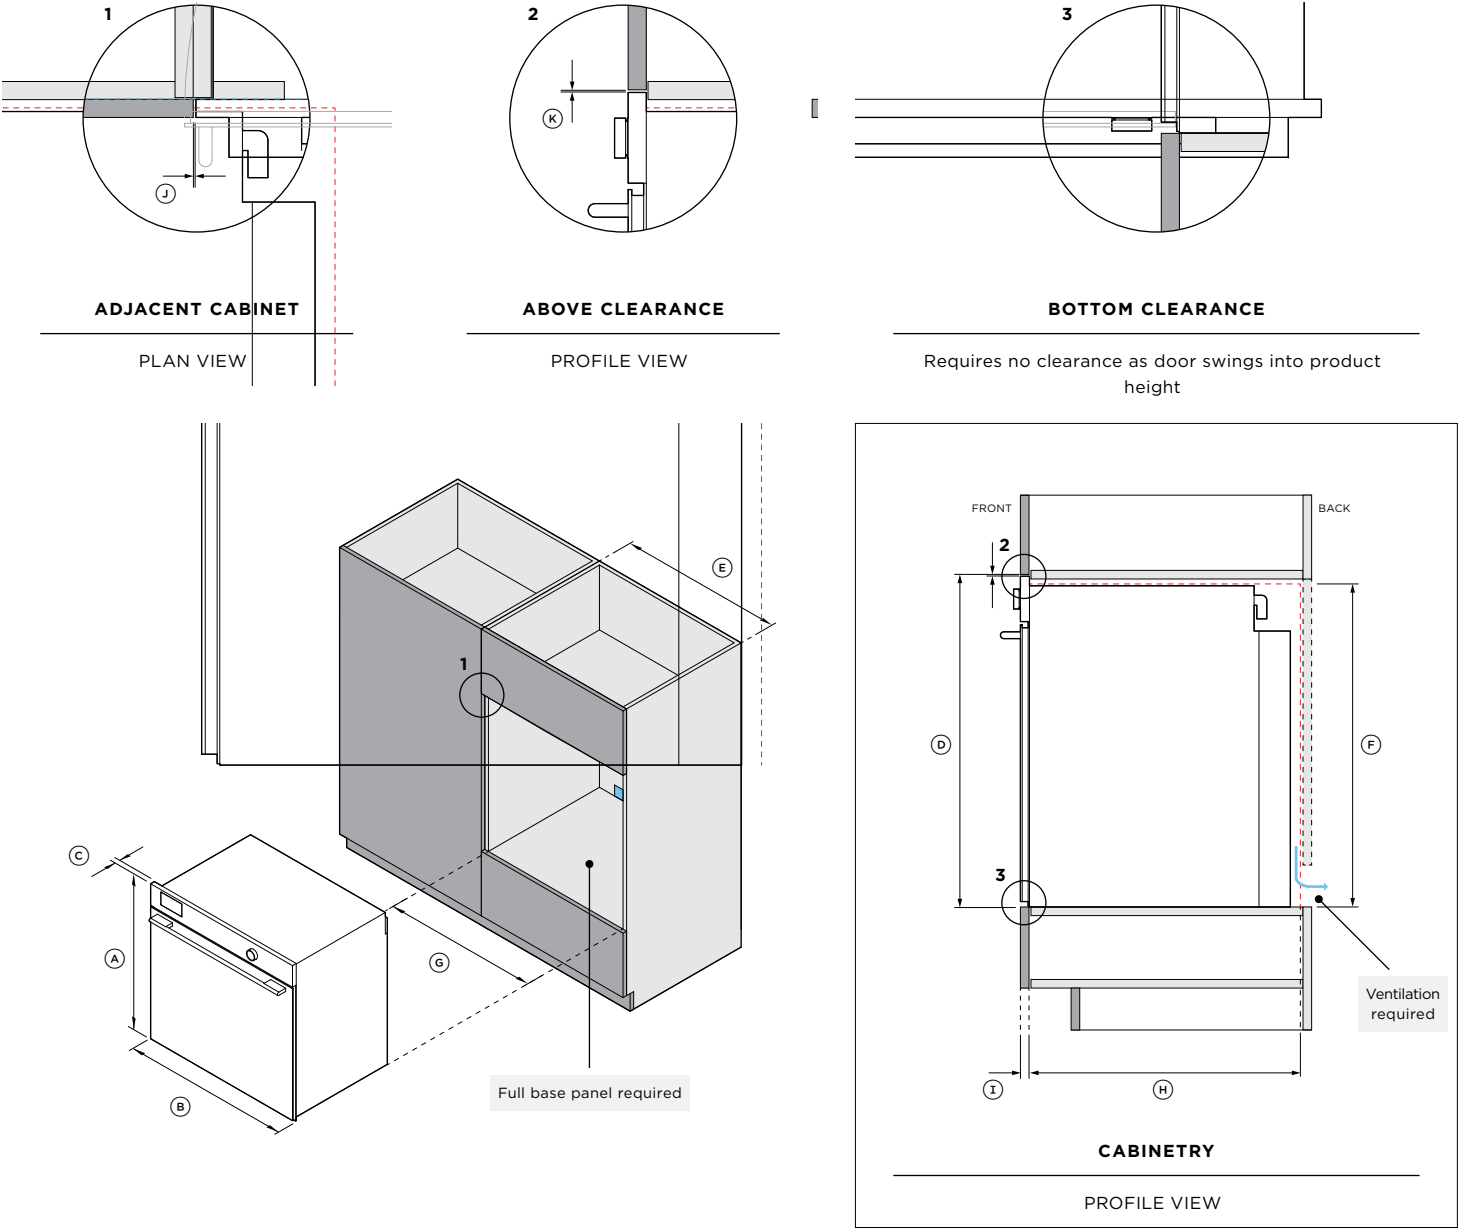

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://www.fisherpaykel.com)

**Model no:**  
OS30SCUDX3      30" Series 11 Contemporary Combi-Steam Oven


| Product Dimensions                                        | inch    | mm  |
|-----------------------------------------------------------|---------|-----|
| (A) Overall height of product                             | 23 9/16 | 598 |
| (B) Overall width of product                              | 29 7/8  | 758 |
| (C) Thickness of control panel (excludes handle and dial) | 13/16   | 20  |

| Cabinetry Dimensions                        | inch      | mm    |
|---------------------------------------------|-----------|-------|
| (D) Recommended cabinet height/stack height | 24        | 600   |
| (E) Recommended cabinet width               | 30        | 762   |
| (F) Minimum inside height of cavity         | 22 13/16  | 580   |
| (G) Minimum inside width of cavity          | 28 1/2    | 724   |
| (H) Minimum inside depth of cavity*         | 21 5/8    | 550   |
| (I) Thickness of cabinetry front panel      | 5/8-13/16 | 16-20 |

\*Measured from front of chassis.

| Cabinetry clearances                                                                          | inch | mm |
|-----------------------------------------------------------------------------------------------|------|----|
| (J) Minimum clearance between adjacent front panel or appliance                               | 1/16 | 2  |
| (K) Minimum clearance above product control panel to upper cabinetry front panel or appliance | 1/16 | 2  |

Note: If installing a cooktop above the oven, ensure adequate clearance is provided for the cooktop as per the cooktop manufacturer's instructions.

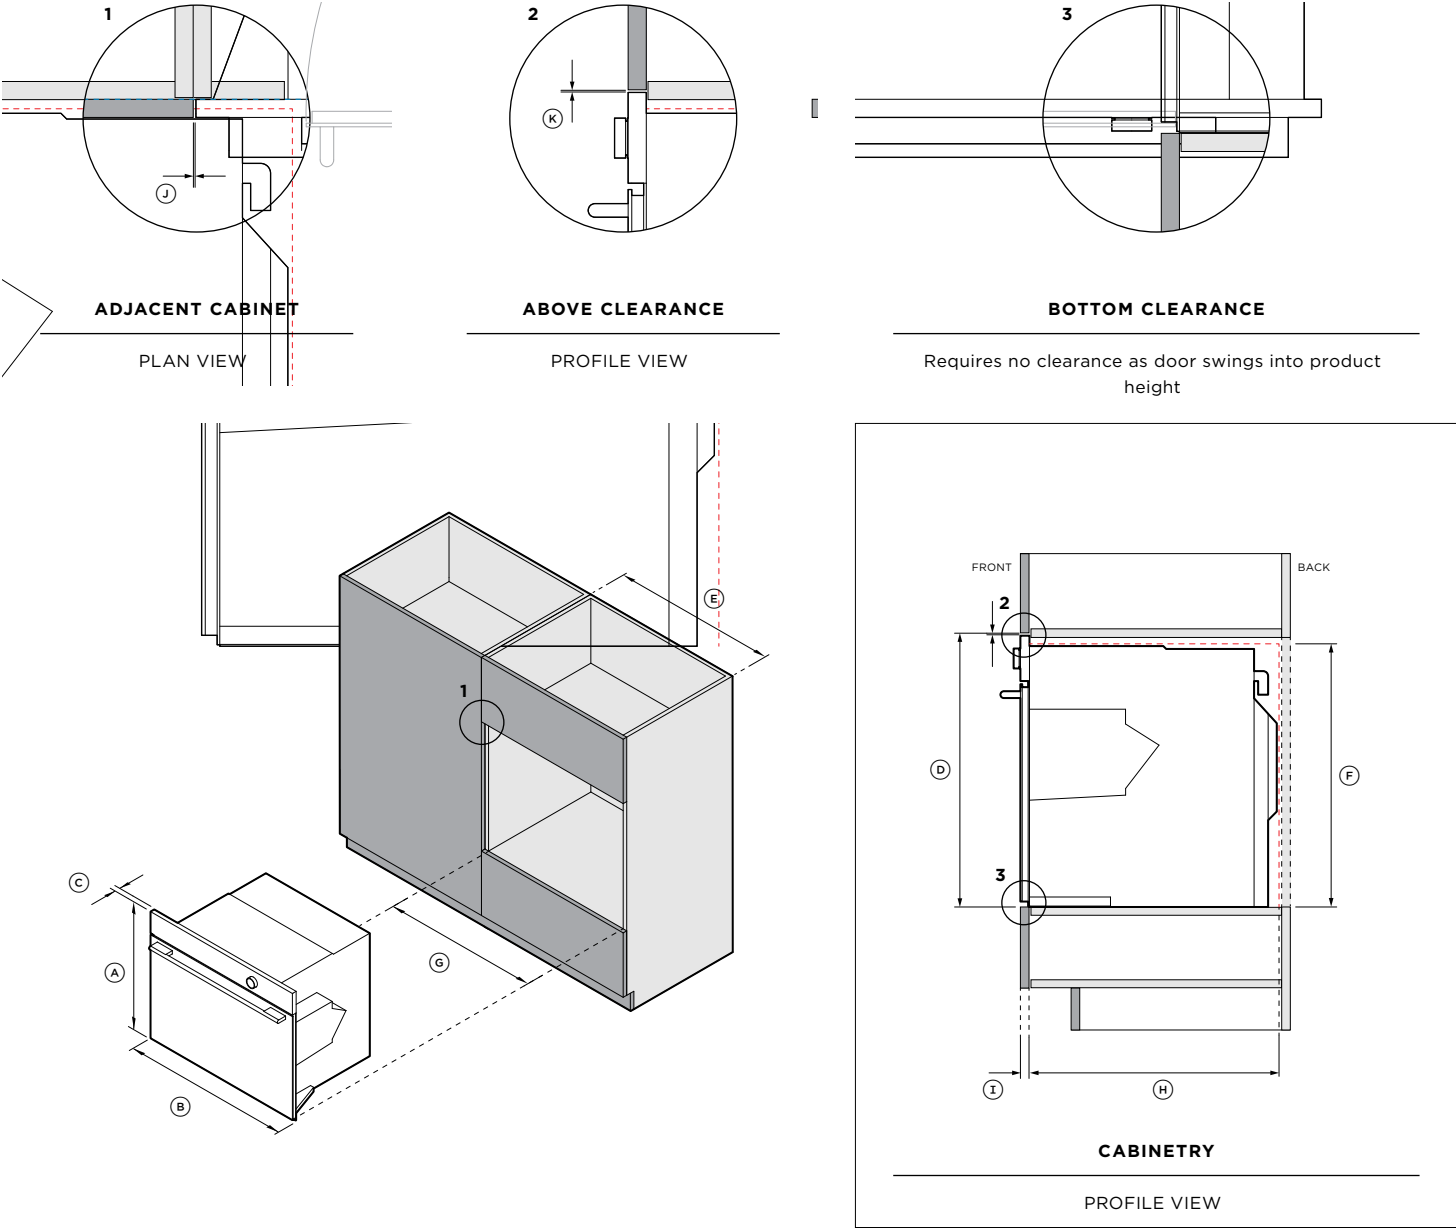

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://fisherpaykel.com)

**Model no:**  
OS30NCUDX3     30" Series 9 Contemporary Compact Combi-Steam Oven


| Product Dimensions                                        | inch   | mm  |
|-----------------------------------------------------------|--------|-----|
| (A) Overall height of product                             | 18     | 458 |
| (B) Overall width of product                              | 29 7/8 | 758 |
| (C) Thickness of control panel (excludes handle and dial) | 13/16  | 20  |

| Cabinetry Dimensions                        | inch      | mm    |
|---------------------------------------------|-----------|-------|
| (D) Recommended cabinet height/stack height | 18 1/8    | 460   |
| (E) Recommended cabinet width               | 30        | 762   |
| (F) Minimum inside height of cavity         | 17 5/16   | 440   |
| (G) Minimum inside width of cavity          | 28 1/2    | 724   |
| (H) Minimum inside depth of cavity*         | 21 5/8    | 550   |
| (I) Thickness of cabinetry front panel      | 5/8-13/16 | 16-20 |

\*Measured from front of chassis.

| Cabinetry clearances                                                                          | inch | mm |
|-----------------------------------------------------------------------------------------------|------|----|
| (J) Minimum clearance between adjacent front panel or appliance                               | 1/16 | 2  |
| (K) Minimum clearance above product control panel to upper cabinetry front panel or appliance | 1/16 | 2  |

Note: If installing a cooktop above the oven, ensure adequate clearance is provided for the cooktop as per the cooktop manufacturer's instructions.

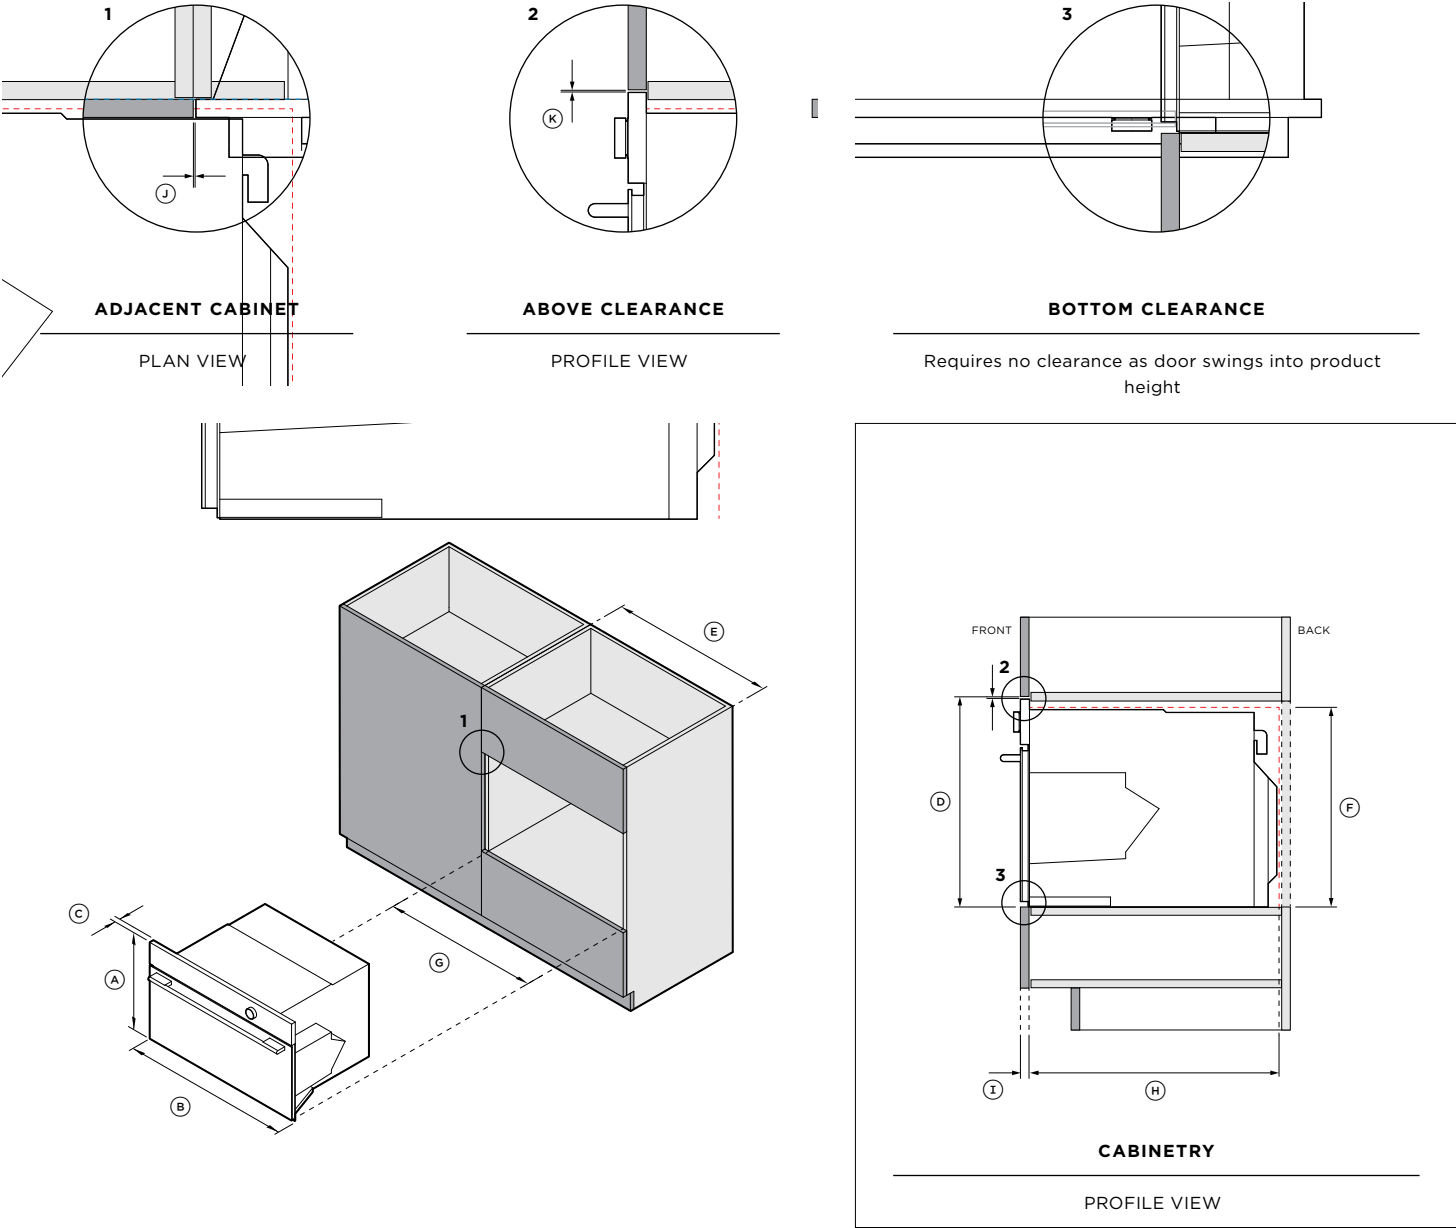

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://fisherpaykel.com)



|                  |                                                         |  |
|------------------|---------------------------------------------------------|--|
| <b>Model no:</b> |                                                         |  |
| OM30NCUDX3       | 30" Series 9 Contemporary Compact Convection-Speed Oven |  |


| Product Dimensions                                      | inch   | mm  |
|---------------------------------------------------------|--------|-----|
| A Overall height of product                             | 18     | 458 |
| B Overall width of product                              | 29 7/8 | 758 |
| C Thickness of control panel (excludes handle and dial) | 13/16  | 20  |

| Cabinetry Dimensions                      | inch      | mm    |
|-------------------------------------------|-----------|-------|
| D Recommended cabinet height/stack height | 18 1/8    | 460   |
| E Recommended cabinet width               | 30        | 762   |
| F Minimum inside height of cavity         | 17 5/16   | 440   |
| G Minimum inside width of cavity          | 28 1/2    | 724   |
| H Minimum inside depth of cavity*         | 21 5/8    | 550   |
| I Thickness of cabinetry front panel      | 5/8-13/16 | 16-20 |
| Rear ventilation height**                 | 2         | 50    |
| Rear ventilation width**                  | 22 1/16   | 560   |

\*Measured from front of chassis.  
\*\*A minimum ventilation area of 43.4in<sup>2</sup> (280cm<sup>2</sup>), equivalent to 2" x 22 1/16" (50mm x 560mm), is required. For more information, refer to the 'Ventilation' section of this Planning Guide.


| Cabinetry clearances                                                                        | inch | mm |
|---------------------------------------------------------------------------------------------|------|----|
| J Minimum clearance between adjacent front panel or appliance                               | 1/16 | 2  |
| K Minimum clearance above product control panel to upper cabinetry front panel or appliance | 1/16 | 2  |

Note: If installing a cooktop above the oven, ensure adequate clearance is provided for the cooktop as per the cooktop manufacturer's instructions.

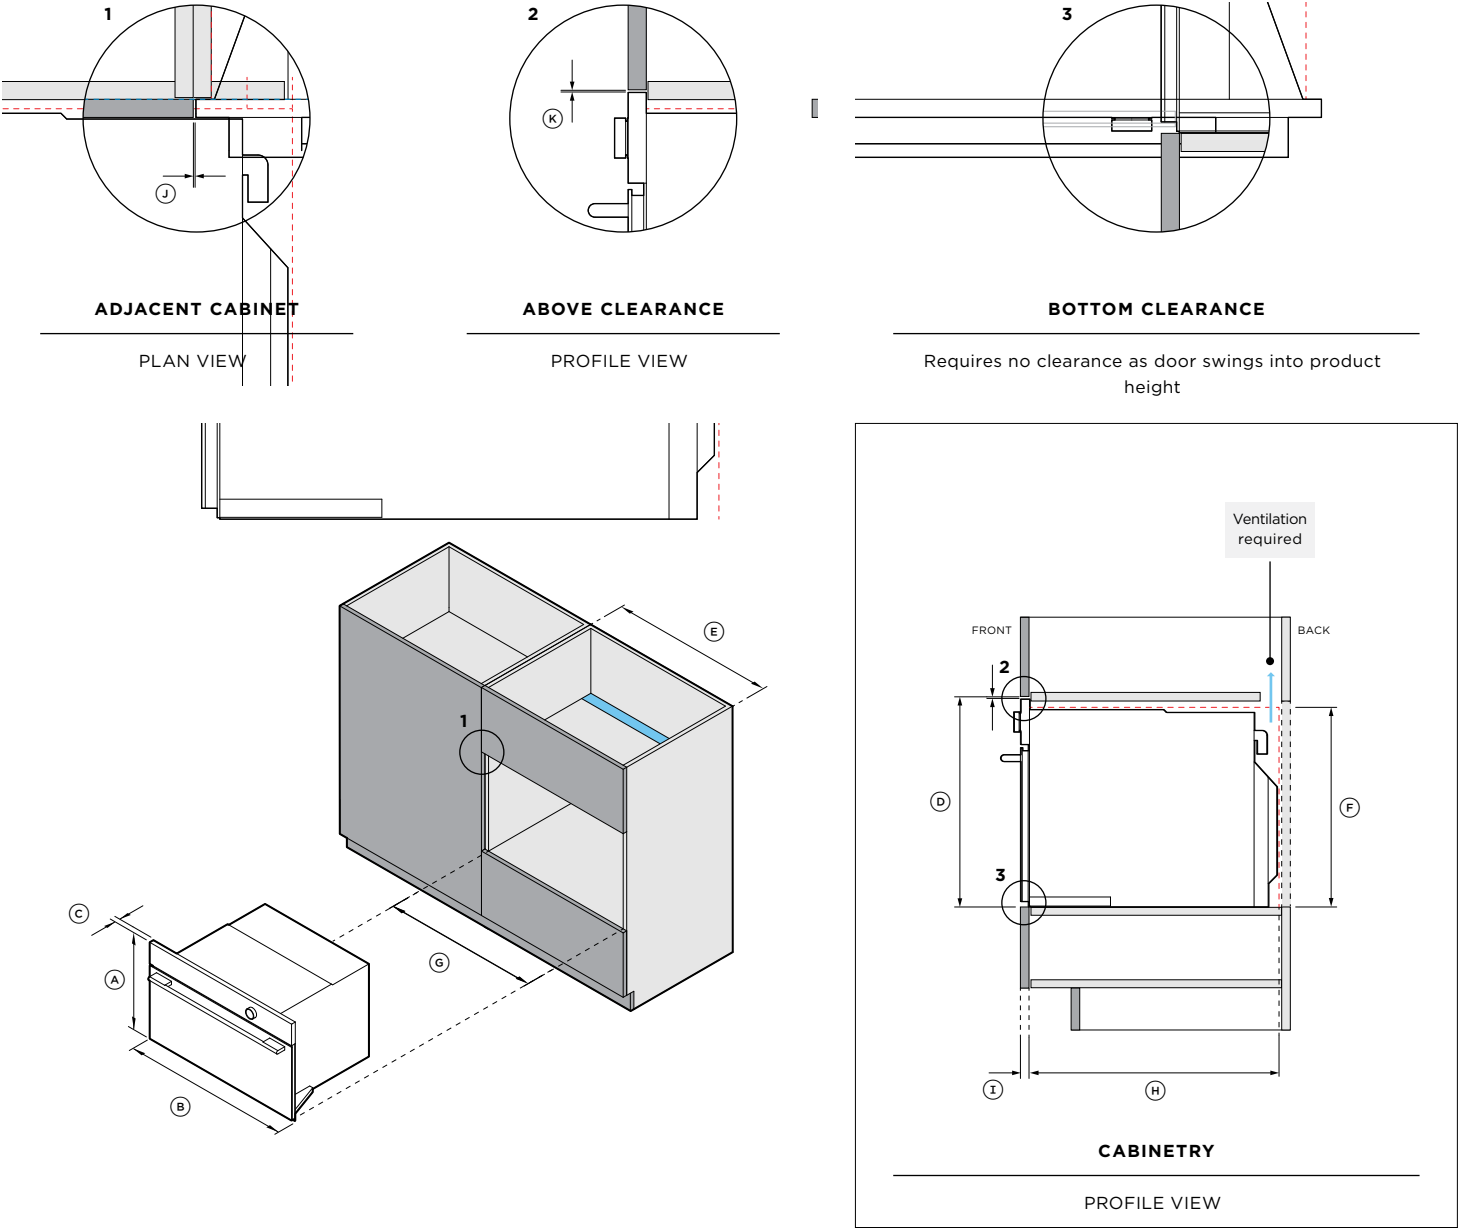


The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

|                                                                                                                                                     |             |           |
|-----------------------------------------------------------------------------------------------------------------------------------------------------|-------------|-----------|
| <b>Model no:</b>                                                                                                                                    |             |           |
| WB30SCX3      30" Series 9 Contemporary Warming Drawer                                                                                              |             |           |
| <b>Product Dimensions</b>                                                                                                                           |             |           |
|                                                                                                                                                     | <b>inch</b> | <b>mm</b> |
| (A) Overall height of product                                                                                                                       | 10 11/16    | 271       |
| (B) Overall width of product                                                                                                                        | 29 7/8      | 758       |
| (C) Thickness of front panel                                                                                                                        | 13/16       | 20        |
| Note: Drawers can fully support 30inch Fisher & Paykel ovens, without adding shelf in between.                                                      |             |           |
| <b>Cabinetry Dimensions</b>                                                                                                                         |             |           |
|                                                                                                                                                     | <b>inch</b> | <b>mm</b> |
| (D) Recommended cabinet height - single install                                                                                                     | 10 3/4      | 273       |
| (E) Recommended cabinet width                                                                                                                       | 30          | 762       |
| (F) Minimum inside height of cavity                                                                                                                 | 10 3/4      | 273       |
| (G) Minimum inside width of cavity                                                                                                                  | 28 1/2      | 724       |
| (H) Minimum inside depth of cavity*                                                                                                                 | 22 13/16    | 580       |
| (I) Thickness of cabinetry front panel                                                                                                              | 5/8-13/16   | 16-20     |
| *Measured from front of chassis.                                                                                                                    |             |           |
| <b>Cabinetry clearances</b>                                                                                                                         |             |           |
|                                                                                                                                                     | <b>inch</b> | <b>mm</b> |
| (J) Minimum clearance between adjacent front panel or appliance                                                                                     | 1/16        | 2         |
| (K) Minimum clearance above products front panel to upper cabinetry front panel or appliance*                                                       | 5/32        | 4         |
| *Achieve a smaller gap between product front panel to upper cabinetry front panel by dropping cabinetry front panel down.                           |             |           |
| Note: If installing a cooktop above the oven, ensure adequate clearance is provided for the cooktop as per the cooktop manufacturer's instructions. |             |           |

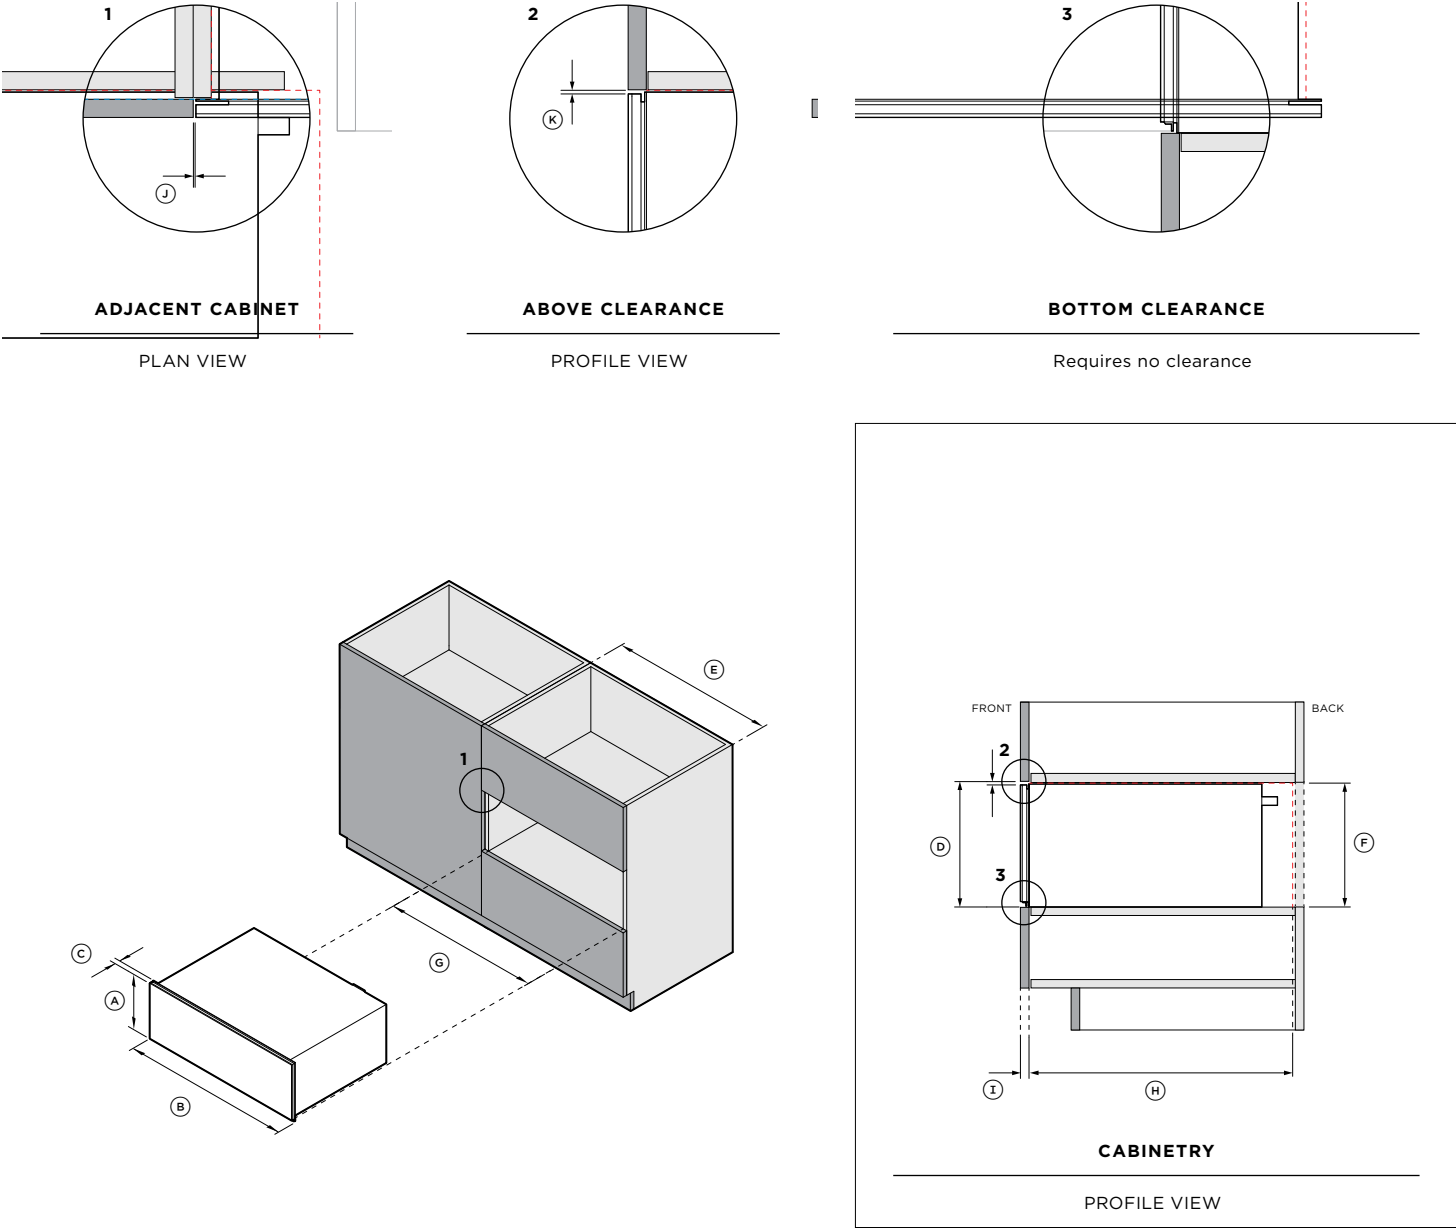

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://www.fisherpaykel.com)

|                                                                                                                                          |             |           |
|------------------------------------------------------------------------------------------------------------------------------------------|-------------|-----------|
| <b>Model no:</b>                                                                                                                         |             |           |
| WB30SDEI3      30" Series 9 Integrated Warming Drawer                                                                                    |             |           |
| <b>Product Dimensions</b>                                                                                                                |             |           |
|                                                                                                                                          | <b>inch</b> | <b>mm</b> |
| (A) Overall height of product                                                                                                            | 10 11/16    | 271       |
| (B) Overall width of product                                                                                                             | 29 7/8      | 758       |
| (C) Thickness of custom front panel                                                                                                      | min 5/8     | min 16    |
| Note: Maximum custom front panel weight 11 lb (5kg).                                                                                     |             |           |
| <b>Cabinetry Dimensions</b>                                                                                                              |             |           |
|                                                                                                                                          | <b>inch</b> | <b>mm</b> |
| (D) Recommended cabinet height - single install                                                                                          | 10 3/4      | 273       |
| (E) Recommended cabinet width                                                                                                            | 30          | 762       |
| (F) Minimum inside height of cavity                                                                                                      | 10 3/4      | 273       |
| (G) Minimum inside width of cavity                                                                                                       | 28 1/2      | 724       |
| (H) Minimum inside depth of cavity*                                                                                                      | 22 13/16    | 580       |
| (I) Thickness of cabinetry front panel                                                                                                   | 5/8-13/16   | 16-20     |
| *Measured from front of chassis.                                                                                                         |             |           |
| <b>Cabinetry clearances</b>                                                                                                              |             |           |
|                                                                                                                                          | <b>inch</b> | <b>mm</b> |
| (J) Minimum clearance between adjacent front panel or appliance                                                                          | 1/16        | 2         |
| (K) Clearance behind custom front panel for push-to-open mechanism*                                                                      | 1/16        | 2         |
| (L) Minimum clearance above product custom front panel to upper cabinetry front panel or appliance                                       | 1/16        | 2         |
| *A clearance of 1/16" (2mm) between the cabinet and the custom front panel is required for the push-to-open mechanism (spacer included). |             |           |
| Note: Drawers can fully support 30inch Fisher & Paykel ovens, without adding shelf in between.                                           |             |           |

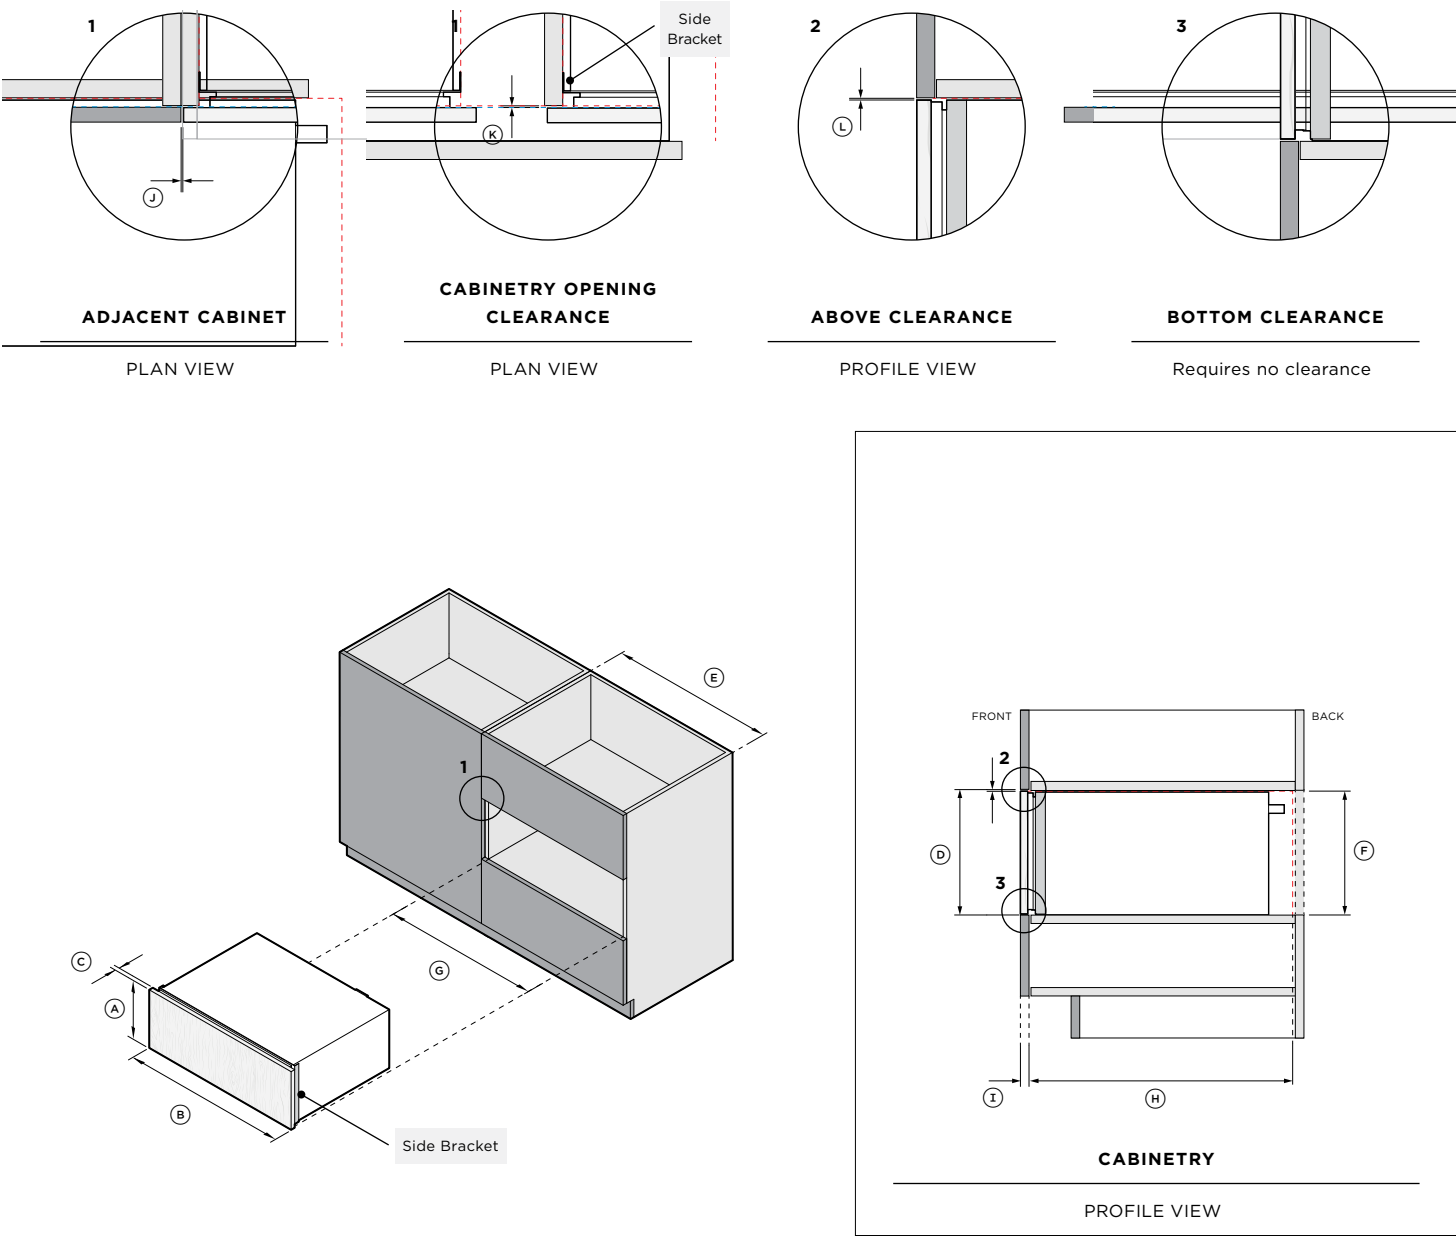

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://www.fisherpaykel.com)

**Model no:**  
VB30SCX3      30" Series 9 Contemporary Vacuum Seal Drawer

| Product Dimensions            | inch     | mm  |
|-------------------------------|----------|-----|
| (A) Overall height of product | 10 11/16 | 271 |
| (B) Overall width of product  | 29 7/8   | 758 |
| (C) Thickness of front panel  | 13/16    | 20  |




Note: Drawers can fully support 30inch Fisher & Paykel ovens, without adding shelf in between.

| Cabinetry Dimensions                            | inch      | mm    |
|-------------------------------------------------|-----------|-------|
| (D) Recommended cabinet height - single install | 10 3/4    | 273   |
| (E) Recommended cabinet width                   | 30        | 762   |
| (F) Minimum inside height of cavity             | 10 3/4    | 273   |
| (G) Minimum inside width of cavity*             | 28 1/2    | 724   |
| (H) Minimum inside depth of cavity**            | 22 13/16  | 580   |
| (I) Thickness of cabinetry front panel          | 5/8-13/16 | 16-20 |

\*Including anti-tip brackets.  
\*\*Measured from front of chassis.


| Cabinetry clearances                                                                          | inch | mm |
|-----------------------------------------------------------------------------------------------|------|----|
| (J) Minimum clearance between adjacent front panel or appliance                               | 1/16 | 2  |
| (K) Minimum clearance above products front panel to upper cabinetry front panel or appliance* | 5/32 | 4  |

\*Achieve a smaller gap between product front panel to upper cabinetry front panel by dropping cabinetry front panel down.  
Note: If installing a cooktop above the oven, ensure adequate clearance is provided for the cooktop as per the cooktop manufacturer's instructions.

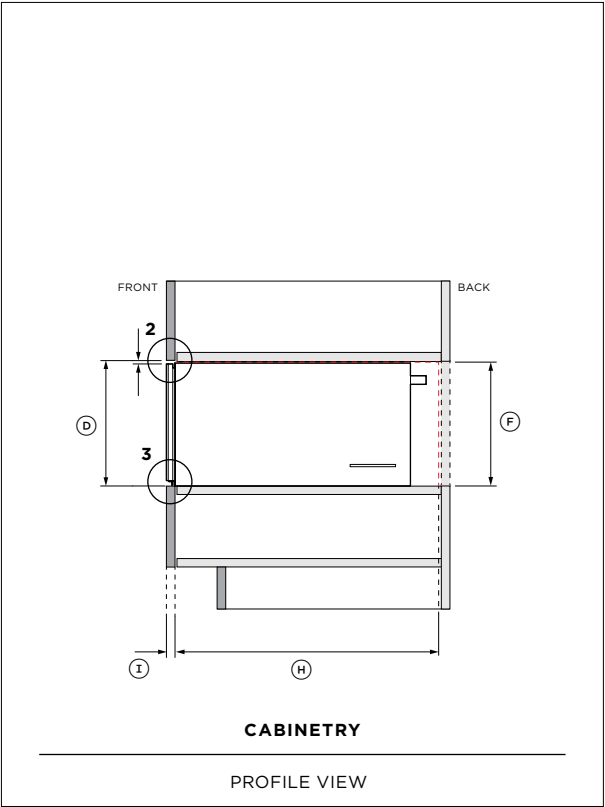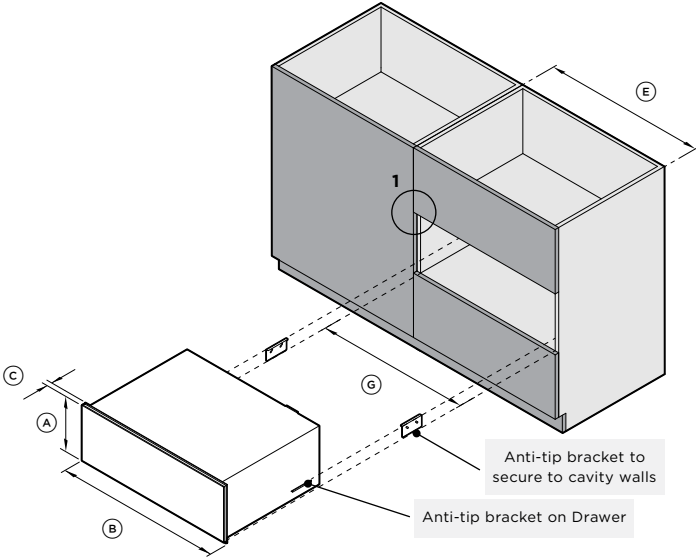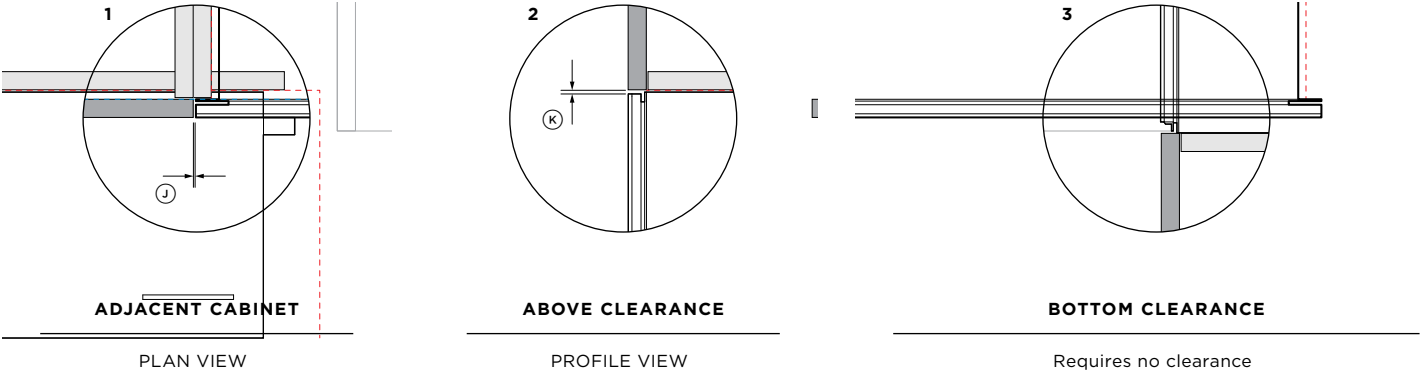


The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://www.fisherpaykel.com)

|                                                                                                                                          |             |           |
|------------------------------------------------------------------------------------------------------------------------------------------|-------------|-----------|
| <b>Model no:</b>                                                                                                                         |             |           |
| VB30SDEI3      30" Series 9 Integrated Vacuum Seal Drawer                                                                                |             |           |
| <b>Product Dimensions</b>                                                                                                                |             |           |
|                                                                                                                                          | <b>inch</b> | <b>mm</b> |
| (A) Overall height of product                                                                                                            | 10 11/16    | 271       |
| (B) Overall width of product                                                                                                             | 29 7/8      | 758       |
| (C) Thickness of custom front panel                                                                                                      | min 5/8     | min 16    |
| Note: Maximum custom front panel weight 11 lb (5kg).                                                                                     |             |           |
| <b>Cabinetry Dimensions</b>                                                                                                              |             |           |
|                                                                                                                                          | <b>inch</b> | <b>mm</b> |
| (D) Recommended cabinet height - single install                                                                                          | 10 3/4      | 273       |
| (E) Recommended cabinet width                                                                                                            | 30          | 762       |
| (F) Minimum inside height of cavity                                                                                                      | 10 3/4      | 273       |
| (G) Minimum inside width of cavity*                                                                                                      | 28 1/2      | 724       |
| (H) Minimum inside depth of cavity**                                                                                                     | 22 13/16    | 580       |
| (I) Thickness of cabinetry front panel                                                                                                   | 5/8-13/16   | 16-20     |
| *Including anti-tip brackets.                                                                                                            |             |           |
| **Measured from front of chassis.                                                                                                        |             |           |
| <b>Cabinetry clearances</b>                                                                                                              |             |           |
|                                                                                                                                          | <b>inch</b> | <b>mm</b> |
| (J) Minimum clearance between adjacent front panel or appliance                                                                          | 1/16        | 2         |
| (K) Clearance behind custom front panel for push-to-open mechanism*                                                                      | 1/16        | 2         |
| (L) Minimum clearance above product custom front panel to upper cabinetry front panel or appliance                                       | 1/16        | 2         |
| *A clearance of 1/16" (2mm) between the cabinet and the custom front panel is required for the push-to-open mechanism (spacer included). |             |           |
| Note: Drawers can fully support 30inch Fisher & Paykel ovens, without adding shelf in between.                                           |             |           |

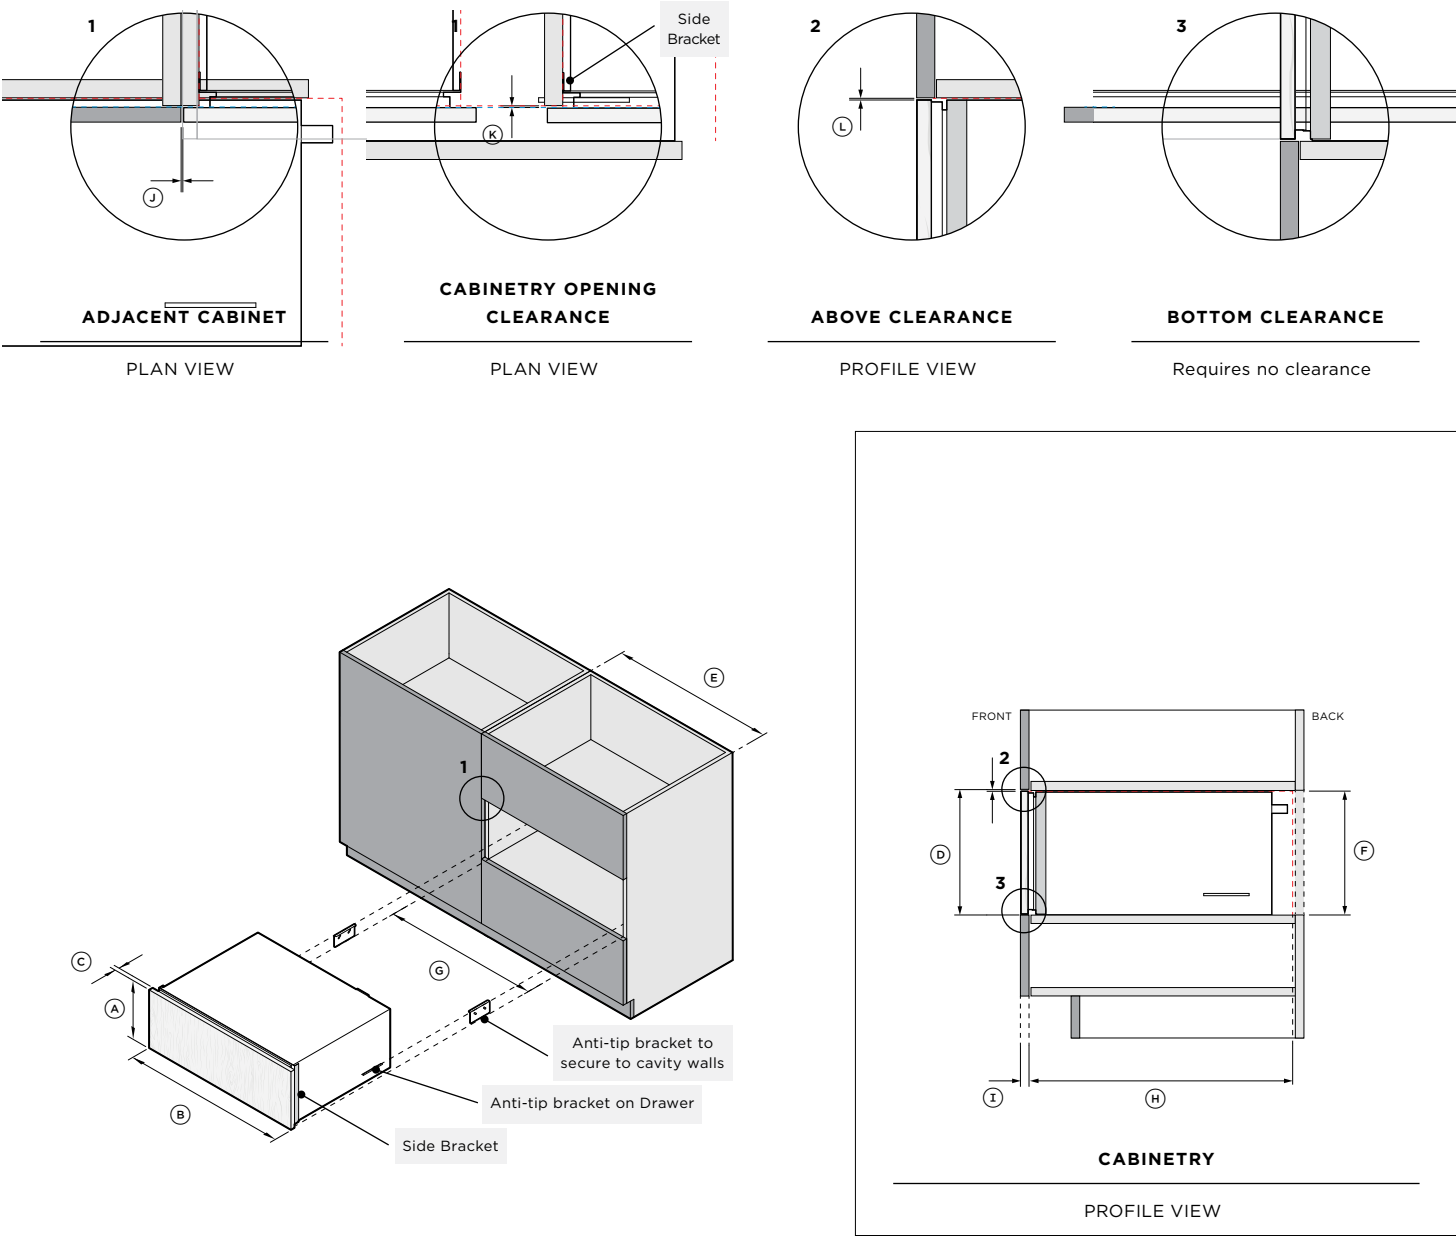

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://www.fisherpaykel.com)

## SERVICES

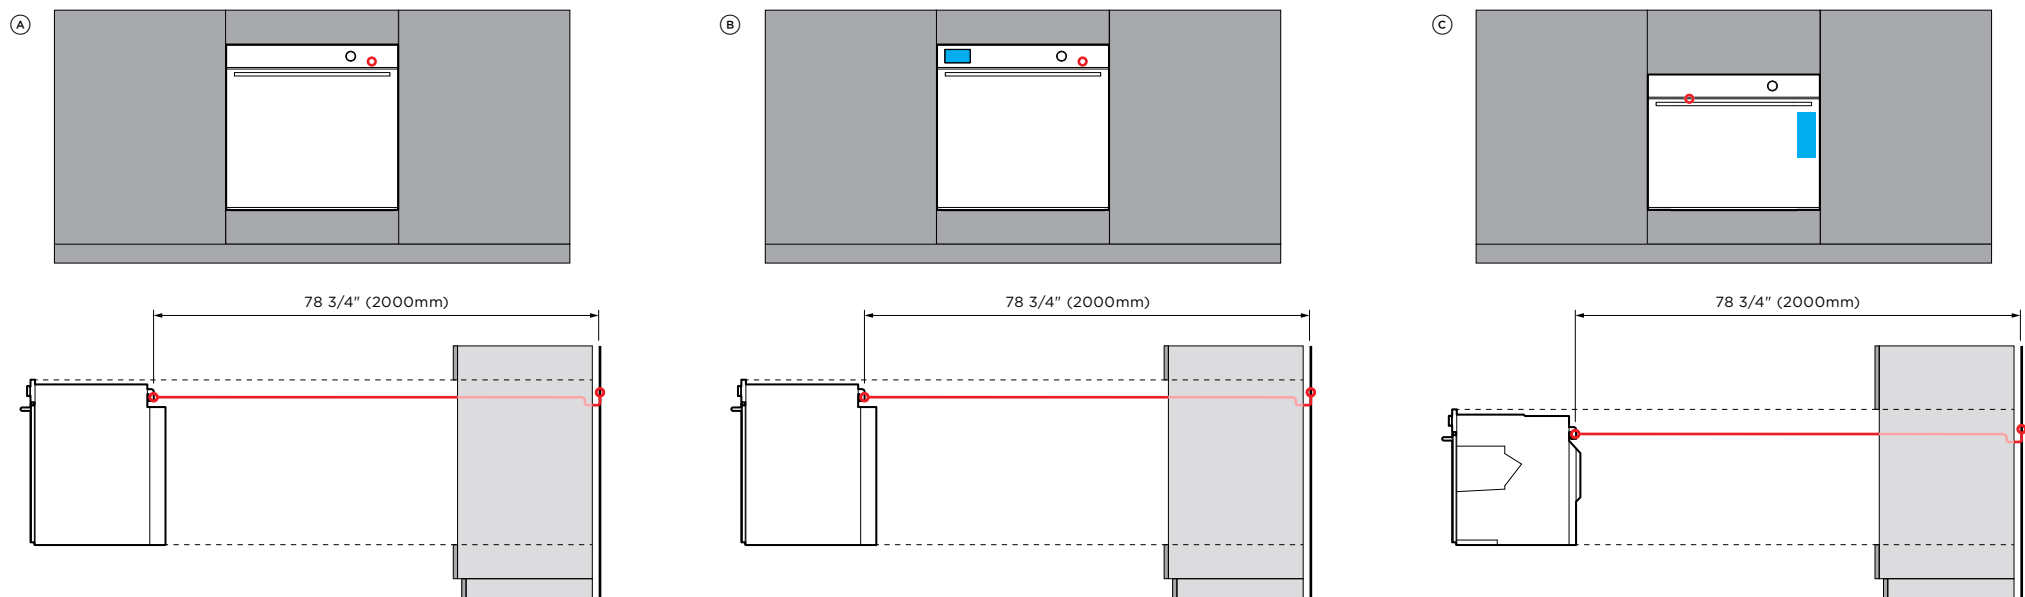





POWER CABLE 

WATER TANK 

Connections may be located in an adjacent cabinet to either side of the appliance. Ensure power will remain accessible following install to allow access for any future product maintenance.

| A SELF-CLEANING OVEN<br>OB30SCPUDX3                                                                          |  | B SELF-CLEANING STEAM ASSIST OVEN<br>OB30SCPSUDX3 |  | C COMBI-STEAM OVEN<br>OS30SCUDX3 |  |
|--------------------------------------------------------------------------------------------------------------|--|---------------------------------------------------|--|----------------------------------|--|
| POWER CORD                                                                                                   |  |                                                   |  |                                  |  |
| Maximum power cord length*                                                                                   |  | 78 3/4" (2000mm)                                  |  | 78 3/4" (2000mm)                 |  |
| Location                                                                                                     |  | Upper right                                       |  | Upper Left                       |  |
| Connection**                                                                                                 |  | Hard wired                                        |  | Hard wired                       |  |
| *Measured from power outlet, supplied with product. **For more information, refer to the Installation Guide. |  |                                                   |  |                                  |  |
| ELECTRICAL                                                                                                   |  |                                                   |  |                                  |  |
| Supply                                                                                                       |  | 208 or 240 V, 60 Hz                               |  | 208 or 240 V, 60 Hz              |  |
| Service                                                                                                      |  | 20 A                                              |  | 20 A                             |  |
| Note: Multiple product installation requires the design of power outlets according to local regulations.     |  |                                                   |  |                                  |  |
| CAPACITY                                                                                                     |  |                                                   |  |                                  |  |
| Total oven capacity                                                                                          |  | 4.9cu ft (137L)                                   |  | 3cu ft (85L)                     |  |
| Total water tank capacity                                                                                    |  | -                                                 |  | 47.3fl oz (1.4L)                 |  |

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](http://fisherpaykel.com)

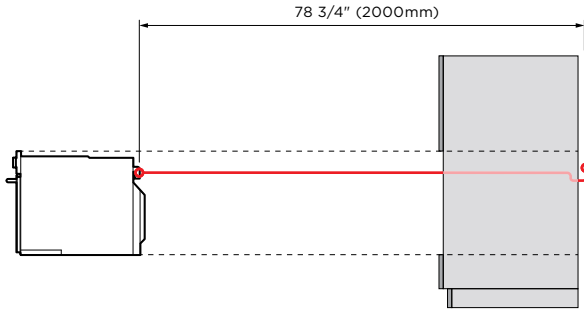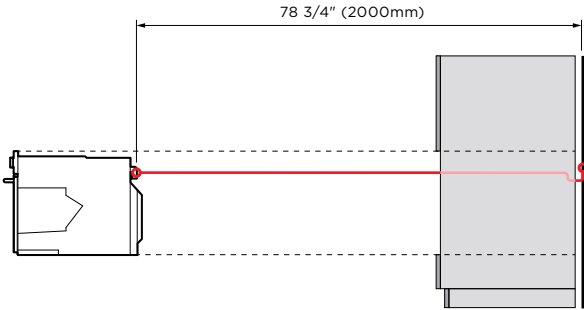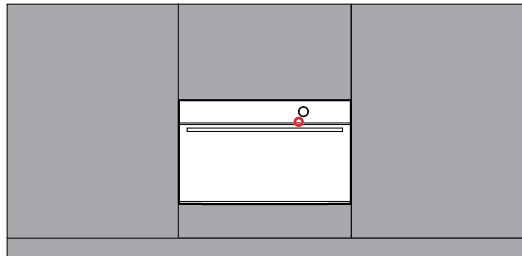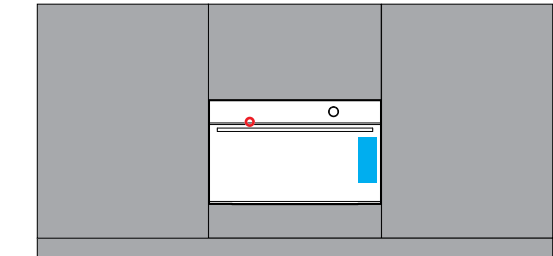

POWER CABLE

WATER TANK

|                                                                                                              |  |
|--------------------------------------------------------------------------------------------------------------|--|
| <b>POWER CORD</b>                                                                                            |  |
| Maximum power cord length*                                                                                   |  |
| Location                                                                                                     |  |
| Connection**                                                                                                 |  |
| *Measured from power outlet, supplied with product. **For more information, refer to the Installation Guide. |  |
| <b>ELECTRICAL</b>                                                                                            |  |
| Supply                                                                                                       |  |
| Service                                                                                                      |  |
| Note: Multiple product installation requires the design of power outlets according to local regulations.     |  |
| <b>CAPACITY</b>                                                                                              |  |
| Total oven capacity                                                                                          |  |
| Total water tank capacity                                                                                    |  |

CONNECTION


Connections may be located in an adjacent cabinet to either side of the appliance. Ensure power will remain accessible following install to allow access for any future product maintenance.

|                                 |                     |
|---------------------------------|---------------------|
| <b>COMPACT COMBI-STEAM OVEN</b> |                     |
| OS30NCUDX3                      |                     |
|                                 | 78 3/4" (2000mm)    |
|                                 | Upper Left          |
|                                 | Hard wired          |
|                                 |                     |
|                                 | 208 or 240 V, 60 Hz |
|                                 | 20 A                |
|                                 |                     |
|                                 | 1.9cu ft (55L)      |
|                                 | 47.3fl oz (1.4L)    |

|                                      |                     |
|--------------------------------------|---------------------|
| <b>COMPACT CONVECTION-SPEED OVEN</b> |                     |
| OM30NCUDX3                           |                     |
|                                      | 78 3/4" (2000mm)    |
|                                      | Upper right         |
|                                      | Hard wired          |
|                                      |                     |
|                                      | 208 or 240 V, 60 Hz |
|                                      | 20 A                |
|                                      |                     |
|                                      | 1.7cu ft (49L)      |
|                                      | -                   |

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](#)



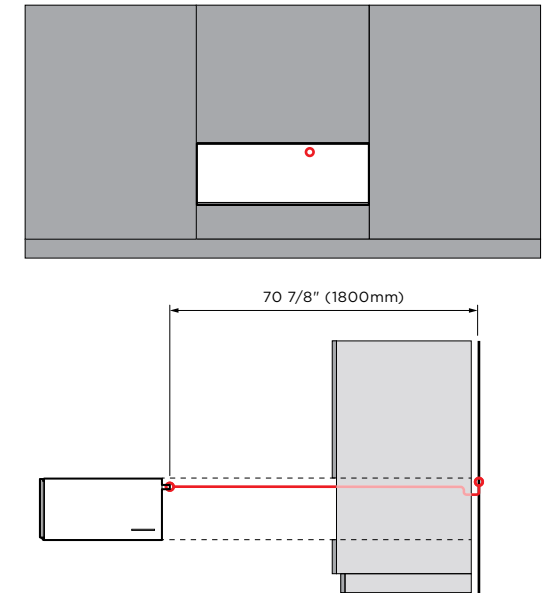

Connections may be located in an adjacent cabinet to either side of the appliance. Ensure power will remain accessible following install to allow access for any future product maintenance.

\*Measured from power outlet, supplied with product. \*\*For more information, refer to the Installation Guide.

Service

Note: Multiple product installation requires the design of power outlets according to local regulations.

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](http://fisherpaykel.com)

