

HMCB36WS

36-INCH CHIMNEY WALL HOOD WITH BLOWER

MASTERPIECE® SERIES




FEATURES & BENEFITS

- Masterpiece® Chimney Wall hoods are sleek, slim, and distinctive in design that add a sophisticated touch to contemporary kitchens
- ★ - Noise Control Technology™ reduces noise while hood is in use
- ★ - Equipped with the Thermador Connected Experience by Home Connect™
 - Cooktop Hood Sync enables control through Freedom® Induction Cooktop
 - Beautiful illumination with multi-level, vivid LED lights

ACCESSORIES (OPTIONAL)

- Stainless Steel Chimney Hood Extension
- CHXTHMCB - For up to 12-foot ceiling applications. Extension replaces upper section of standard chimney extension.
- Recirculation Kit
- RECHMCB - For HMCBxxWS Masterpiece® Chimney Wall Hoods only
- Replacement Charcoal Filter
- CHFHMCD - For use with recirculation kit RECHMCB
- Remote Control Panel
- REMCPU - Ability to vertically install on cabinetry or wall to control hood in a convenient location

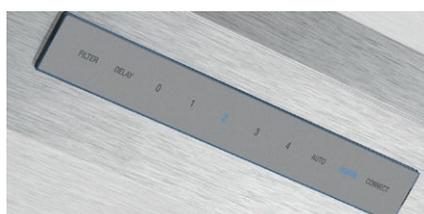

GENERAL PROPERTIES

Features

Cooktop Hood-Sync Enabled, Noise Control Technology™, Multi-Level LED Lights with Fading Transitions, Automatic Mode, Check Filter Reminder Light, Delay Shut-Off

| | |
|-------------------------------|-------------------------------------|
| Operating Mode | Convertible: Ducted / Recirculating |
| Maximum CFM | 600 CFM |
| Sones* | 2.3 |
| Number of Speed Settings | 4-Stage |
| Motor Location | Integrated Motor In Hood Body |
| Number of Lights | 2 |
| Bulb Type | LED |
| Total Power of the Lamps (W) | 2.4 W |
| Damper Included | Yes |
| Grease Filter Material | Washable Stainless Steel |
| Grease Filter Type | Hybrid Mesh |
| Home Connect™ (Wi-Fi Enabled) | Yes |

TECHNICAL DETAILS

| | |
|----------------|---------|
| Watts (W) | 455 W |
| Current (A) | 15 A |
| Volts (V) | 120 V |
| Frequency (Hz) | 60 Hz |
| Plug Type | 3 Prong |
| Conduit Length | 60" |

DIMENSIONS & WEIGHT

| | |
|--|---------------------------|
| Overall Appliance Dimensions (Width of Canopy Included) (HxWxD) (in) | 5" x 35 15/16" x 23 3/16" |
| Height of the Chimney (in) | 25" – 27" |
| Accommodates Ceiling Heights | Up to 9' Ceiling Heights |
| Minimum Required Distance Above Gas / Electric Cooking Surface | 30" / 30" |
| Diameter of Air Duct (in) Top | 8" |
| Net Weight (lbs) | 69 lbs |

WARRANTY

| | |
|----------------------------------|--------|
| Limited Warranty Parts and Labor | 2 Year |
|----------------------------------|--------|

*On speed 1 for ducted installation


HM CB36WS

36-INCH CHIMNEY WALL HOOD WITH BLOWER

MASTERPIECE® SERIES



HOOD DIMENSIONS

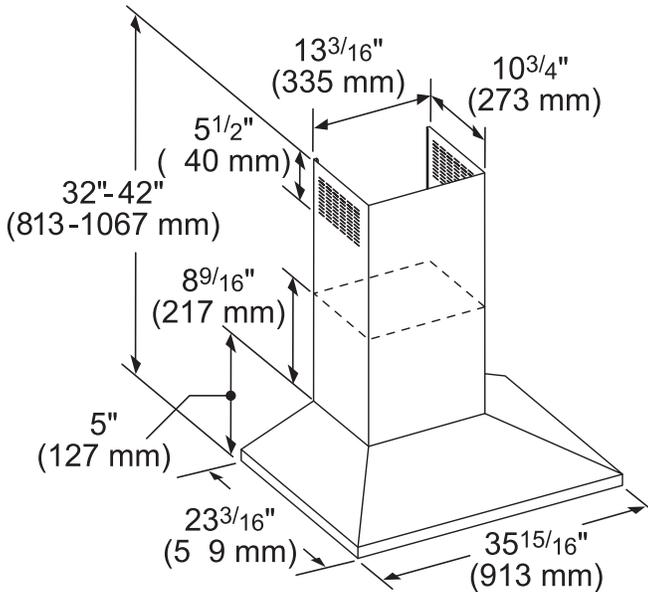

measurements in inches (mm)

OPTIONAL ACCESSORIES

CHIMNEY EXTENSION KIT CHXTHMCB

Telescoping design for extension up to 12' ceiling heights

RECIRCULATION KIT RECHMCB

Ideal for applications where ducting out is not possible

REPLACEMENT CHARCOAL FILTERS CHFHMCD

For Use With Recirculation Kit RECHMCB

REMOTE CONTROL PANEL REMCPW



Convenience at your fingertips: The remote control accessory offers the freedom to extend your hood controls to a more reachable spot

These warranties give you specific legal rights and you may have other rights that vary from state to state. Full warranty and limited warranty from date of installation. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.