

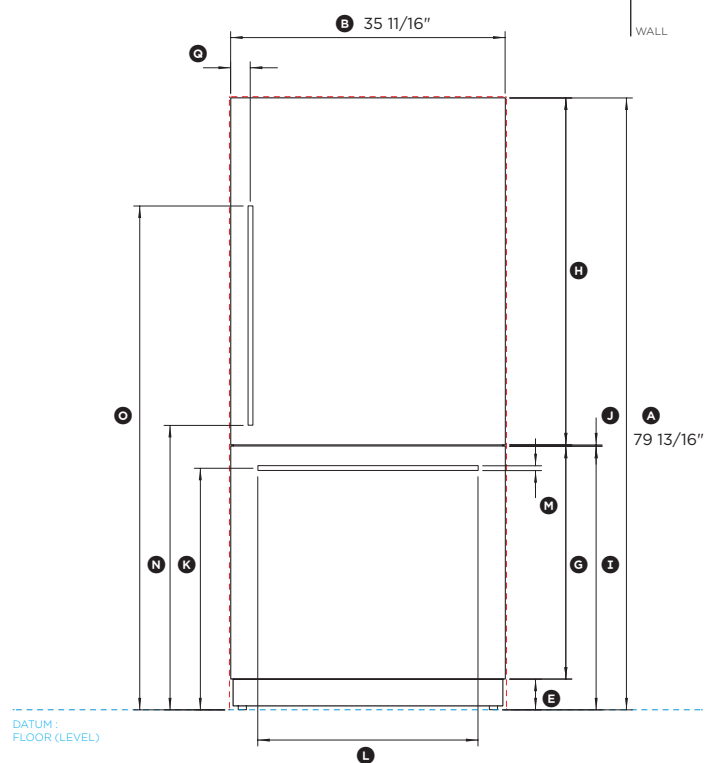


FISHER & PAYKEL

DATA SHEET 36" ActiveSmart Built-In Fridge

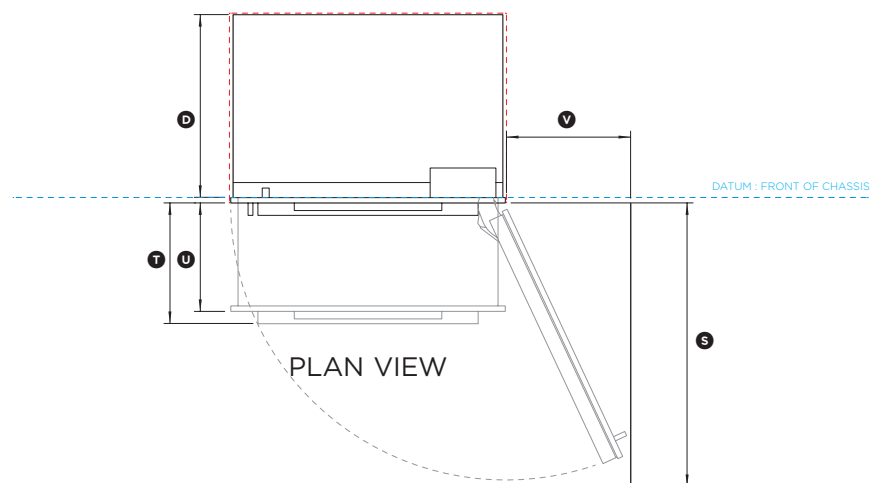

FRONT VIEW

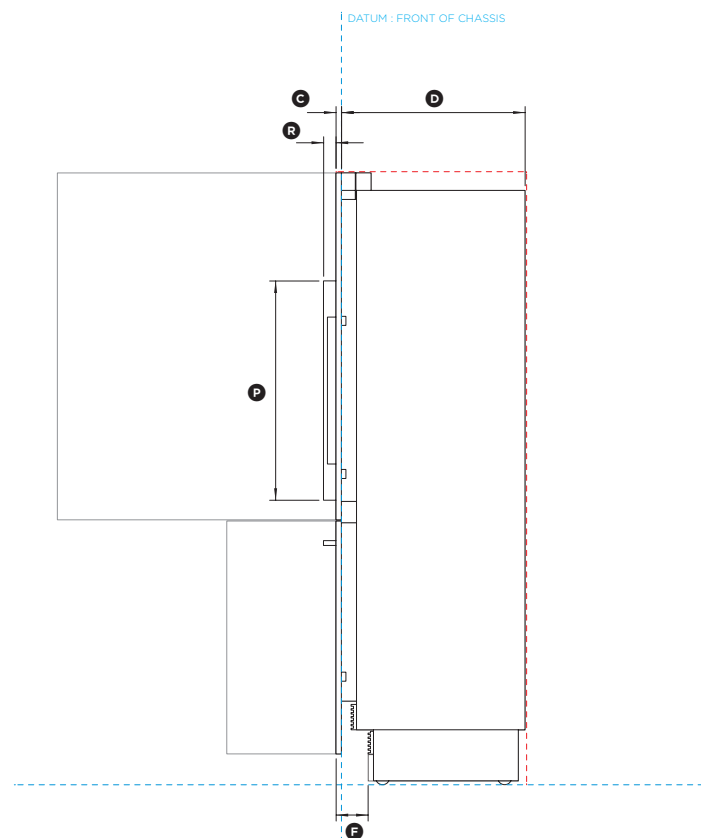

PROFILE VIEW

Model no:

RS36W80RJ1 (with Stainless Door panels PART NO. RD3680R)
RS36W80LJ1 (with Stainless Door panels PART NO. RD3680L)

Note: Left hand hinge model is a mirrored version of image shown.
(refer page 2 for metric measurements)

Product Dimensions	in
Ⓐ Overall height of fridge	79 13/16"
Ⓑ Overall width of fridge	35 11/16"
Ⓒ Depth of fridge front panels (excl. handles)	3/4"
Ⓓ Overall depth of fridge (excl. front door panels)	23 7/8"
Ⓔ Height from bottom datum to top of toekick	4"
Ⓕ Depth of toekick measured from front of door	2 13/16" - 4"
Ⓖ Height of bottom drawer panel	30 3/8"
Ⓗ Height of top door panels	45 1/4"
Ⓘ Height from bottom datum to top of drawer panel	34 7/16"
Ⓢ Gap between top and bottom door panels	5/32"
Ⓚ Height from bottom datum to centre of bottom handle	31 9/16"
Ⓛ Width of bottom handle	28 5/8"
Ⓜ Thickness of handles	5/8"
Ⓝ Height from bottom datum to bottom of top handle	37 1/8"
Ⓞ Height from bottom datum to top of top handle	65 3/4"
Ⓟ Height of top handle	28 5/8"
Ⓠ Distance from side of fridge to the centre of top handle	2 9/16"
Ⓡ Depth of handle (measured from front of door)	1 5/8"
Ⓣ Depth of door (widest opening) measured from front of door	37"
Ⓤ Depth of drawer (open) measured from front of drawer, including handle	15 3/4"
Ⓡ Depth of drawer (open) measured from front of drawer, excluding handle	14 3/16"
Ⓡ Minimum door clearance to adjacent wall (115° - full internal access)	16 1/8"
Clearance Dimensions	in
Minimum cabinetry gap clearance from edge of product	5/32"
Overall height of cavity	80"
Overall width of cavity	36"
Overall minimum depth of cavity	24 3/4"


INDICATES CABINETRY / PRODUCT DATUM - - - - -
INDICATES CABINETRY CLEARANCES - - - - -

DATE: 05.05.2017

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

FISHER & PAYKEL

DATA SHEET 36" ActiveSmart Built-In Fridge

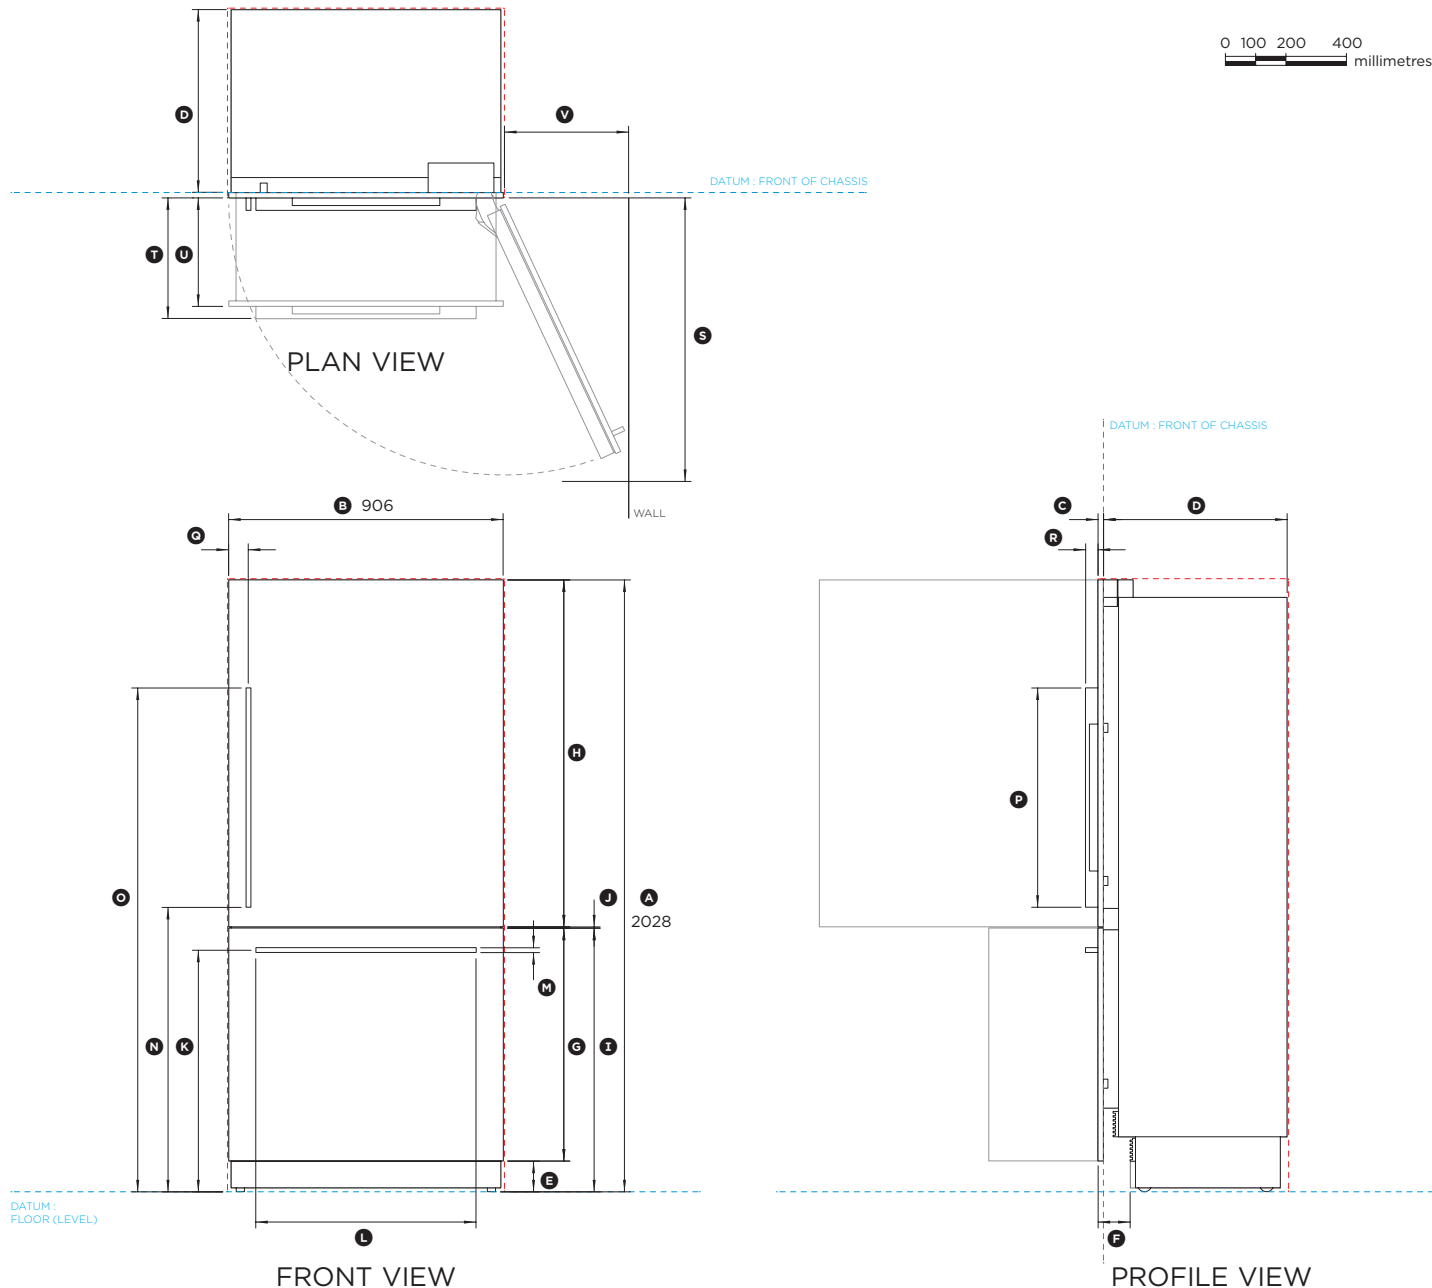

Model no:

RS36W80RJ1 (with Stainless Door panels PART NO. RD3680R)

RS36W80LJ1 (with Stainless Door panels PART NO. RD3680L)

Note: Left hand hinge model is a mirrored version of image shown.
(refer page 1 for imperial measurements)

Product Dimensions	mm
Ⓐ Overall height of fridge	2028
Ⓑ Overall width of fridge	906
Ⓒ Depth of fridge front panels (excl. handles)	19
Ⓓ Overall depth of fridge (excl. front door panels)	606
Ⓔ Height from bottom datum to top of toe kick	102
Ⓕ Depth of toe kick measured from front of door	71 - 101
Ⓖ Height of bottom drawer panel	772
Ⓗ Height of top door panels	1150
Ⓘ Height from bottom datum to top of drawer panel	874
Ⓛ Gap between top and bottom door panels	4
Ⓚ Height from bottom datum to centre of bottom handle	801
Ⓛ Width of bottom handle	727
Ⓜ Thickness of handles	16
Ⓝ Height from bottom datum to bottom of top handle	943
Ⓞ Height from bottom datum to top of top handle	1670
Ⓟ Height of top handle	727
Ⓢ Distance from side of fridge to the centre of top handle	65
Ⓡ Depth of handle (measured from front of door)	41
Ⓣ Depth of door (widest opening) measured from front of door	940
Ⓤ Depth of drawer (open) measured from front of drawer, including handle	400
Ⓡ Depth of drawer (open) measured from front of drawer, excluding handle	360
Ⓡ Minimum door clearance to adjacent wall (115° - full internal access)	410
Clearance Dimensions	mm
Minimum cabinetry gap clearance from edge of product	4
Overall height of cavity	2032
Overall width of cavity	914
Overall minimum depth of cavity	629

INDICATES CABINETRY / PRODUCT DATUM - - - - -
INDICATES CABINETRY CLEARANCES - - - - -

DATE: 05.05.2017

IMPORTANT NOTE: Throughout this guide, dimensions may vary by $\pm 2\text{mm}$ (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com