





The Next Necessity™



Dimensions

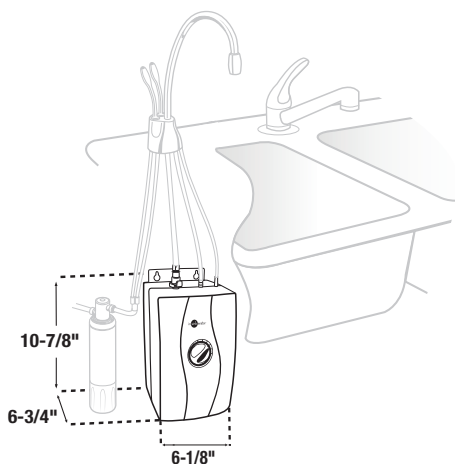

Job Specifications



Instant Hot Water Dispensers

Model HWT-00

Stainless Steel Tank dispenses near-boiling 200°F water instantly

Water dispenser and filtration sold separately

Submittal Sheet

- 2/3-gallon stainless steel tank
- Easy to adjust temperature control
- Tool-free tank connections and dry start protection to ease installation
- Provides 60 cups/hour of near-boiling water
- 115 volts, 750 watts, 6.5 amps
- For use with InSinkErator instant hot water dispensers (excluding model Hot1 and Hot100)
- Unit not for commercial/industrial use

Specifications

Capacity	2/3-gallon stainless steel tank dispenses 60 cups of 200°F water per hour
Electrical	115 volts, A.C., 750 watts, 6.5 amp heating element with grounded three (3) prong plug
Thermostat	Snap-action, adjustable from 160°F to 210°F (factory pre-set at 200°F)
Insulation	Meets U.L. 94HF-1 flammability specification
Recommended Supply Pressure	30-80 psi
Shipping Weight	Approximately 5.7 lbs.

Sample Specification

Instant hot water dispenser(s) shall be equipped with an InSinkErator Model HWT-00 stainless steel tank with adjustable temperature from 160°F to 210°F.

We Come To You® 3-Year In-Home Limited Warranty*

* The complete InSinkErator warranty is included in the Care & Use booklet packed with each unit.

US Pat. D532,497 (tank enclosure)



USA
1-800-558-5700
www.insinkerator.com

Canada
1-800-558-5700
www.insinkerator.ca

InSinkErator may make improvements and/or changes in the specifications at any time, in its sole discretion, without notice or obligation and further reserves the right to change or discontinue models.