



# Drop-In Cooktops

FFEC3205L S/W

32" Electric



## Product Dimensions

Width	32-1/4"
Depth	20-1/4"
Height	3-3/4"

## More Easy-To-Use Features

### "On" Indicator

Alerts you when your cooktop is on.

### Spill Saver™ Drip Bowls

Cooktop features chrome drip bowls that make cleaning up spills quick and easy.

A.D.A. Compliant<sup>2</sup>

## Available in:



Elements	Size	Watts
Right Front	8"	2,100
Right Rear	6"	1,250
Left Front	6"	1,250
Left Rear	8"	2,100

<sup>1</sup>Select models only.

<sup>2</sup>When properly installed, meets the appliance standards in the Americans with Disabilities Act and the Architectural Barriers Act Accessibility Guidelines as published by the United States Access Board on June 23, 2004, as amended August 5, 2005.

## Signature Features

### Ready-Select™ Controls

Select options or control cooking temperature with our easy-to-use controls.

### Durable Stainless Steel Cooktop<sup>1</sup>

A premium look that stands up to everyday use.

### Spill Saver™ Cooktop

Cooktop contains your spillovers for easier cleanup.


### Color-Coordinated Control Knobs

White cooktops come with matching knobs — while Stainless Steel models feature our neutral black knobs.

Features	
Controls	Ready-Select™
Surface Type	Brushed Chrome (S), Color-Coordinated Porcelain (W)
Right Front Element (Watts)	8" - 2,100
Right Rear Element (Watts)	6" - 1,250
Left Front Element (Watts)	6" - 1,250
Left Rear Element (Watts)	8" - 2,100
"On" Indicator	Yes
Control Location	Front Left
Knob Color	Black (S), Color-Coordinated (W)
Knob Type	Plastic
Bowl Type	Chrome
Certifications	
A.D.A. Compliant¹	Yes
Specifications	
Power Supply Connection Location	Left Side
Voltage Rating	240V/208V/60Hz
Connected Load (kW Rating) @ 240/208 Volts²	6.7/5.0
Amps @ 240/208 Volts	22.3/19.2
Minimum Circuit Required (Amps)	30
Approved for Electric Single Wall Oven Combination Installation	
Shipping Weight (Approx.)	30 Lbs.

¹When properly installed, meets the appliance standards in the Americans with Disabilities Act and the Architectural Barriers Act Accessibility Guidelines as published by the United States Access Board on June 23, 2004, as amended August 5, 2005.

²Single phase 3- or 4-wire cable, 120/240 or 120/208 Volt, 60 Hertz AC only electrical supply with ground required on separate circuit fused on both sides of line.

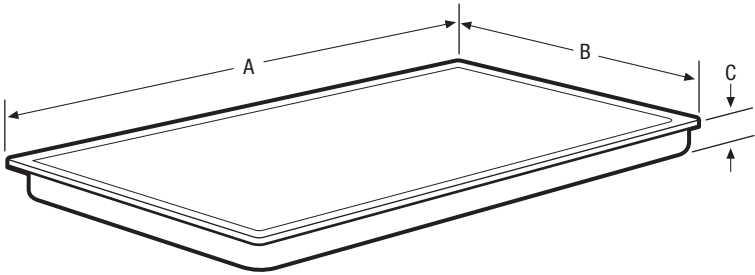

NOTE: Always consult local and national electric codes. Refer to Product Installation Guide for detailed installation instructions on the web at [frigidaire.com](http://frigidaire.com).



Product Dimensions	
A - Width	32-1/4"
B - Depth	20-1/4"
C - Height	3-3/4"

Cutout Dimensions	
Width (Min.)	31"
Width (Max.)	31-1/4"
Depth (Min.)	19"
Depth (Max.)	19-1/4"
Height	5-3/4"

Granite Countertop  
Installation Kit available.

Accessories information available  
on the web at [frigidaire.com](http://frigidaire.com)