

HT-S5600 7.1-Channel Home Theater Receiver/Speaker Package



Power and Quality from the Home Theater Professionals

Rediscover your favorite movies, music, and games in surround sound with the addition of this seven-channel home theater package from Onkyo. Duck for cover as Dolby® Pro Logic IIz® sends bullets whizzing over your head through two Front Height speakers, or just relax into a soundstage that's balanced and optimized courtesy of Audyssey 2EQ® acoustic correction, Dynamic EQ®, and Dynamic Volume®. Four 3D-ready HDMI® inputs are provided to connect your gaming consoles and media players, and for music, a front-panel USB for lossless and compressed audio from iPod®, iPhone®, or flash drive. Invest in a UBT-I adapter to enable Bluetooth wireless audio streaming technology, with a brilliant aptX® codec ensuring near CD-quality sound. The work of speaker selection has been done for you—a beautifully balanced eight-piece set features a dual-drive center speaker and punchy 120 W down-firing subwoofer. There's even powered Zone 2 outputs should you wish to distribute audio in another room—say, the kitchen or deck. Easy to own, simple to use, and packing a huge amount of power for your dollar, there really is no better time to discover the joys of surround-sound entertainment.

HT-R592

7.1-Channel Home Theater Receiver

- 130 Watts per Channel (6 Ohms, 1 kHz, 1% THD, 1 Channel Driven); 80 Watts per Channel (8 Ohms, 20 Hz–20 kHz, 0.7% THD, 2 Channels Driven, FTC)
- HDMI® Support for 3D, Audio Return Channel, DeepColor™, x.v.Color™, LipSync, Dolby® TrueHD, DTS-HD Master Audio™, DVD-Audio, Super Audio CD, Multichannel PCM, and CEC
- 4 HDMI Inputs and 1 Output
- Dolby TrueHD, DTS-HD Master Audio™, Dolby Digital Plus, DTS-HD High-Resolution Audio™ Decoding
- Dolby® Pro Logic® IIz Upmixing for Seven-Channel Surround Sound
- Direct Digital Connection of iPod®/iPhone® via Front-Panel USB Port
- WRAT (Wide Range Amplifier Technology)
- Powered Zone 2 and Zone 2 Line-Out for Distributed Audio Playback in Another Room
- Compatible with Optional UBT-I Bluetooth USB Adapter for Wireless Audio Streaming
- Discrete Output Stage Circuitry
- Overlaid On-Screen Display (OSD) via HDMI
- Audyssey 2EQ® for Room Acoustic Correction
- Audyssey Dynamic EQ® for Loudness Correction
- Audyssey Dynamic Volume® to Maintain Optimal Listening Level and Dynamic Range
- TI Burr-Brown 192 kHz/24-Bit DAC for All Channels
- PLL (Phase Locked Loop) Jitter-Cleaning Circuit Technology for S/PDIF Audio

- H.C.P.S. (High Current Power Supply) Massive High Power Transformer
- Optimum Gain Volume Circuitry
- Advanced 32-Bit Processing DSP Chip
- 4 DSP Modes for Gaming: Rock, Sports, Action, and RPG
- Advanced Music Optimizer for Compressed Digital Music Files
- Theater-Dimensional Virtual Surround Function
- CinemaFILTER™
- Direct Mode
- Mass Storage Class USB Memory Playback Capability
- HDTV-Capable (720p/1080i) Component Video Switching (2 Inputs and 1 Output)
- 5 Composite Video Inputs (1 Front/4 Rear) and 2 Outputs
- 3 Digital Audio Inputs (1 Optical and 2 Coaxial)
- 6 Analog Audio Inputs (1 Front/5 Rear) and 1 Output
- Color-Coded, Banana Plug-Compatible Speaker Posts (Except Zone 2)
- Crossover Adjustment (40/50/60/70/80/90/100/120/150/200 Hz)
- A/V Sync Control (Up to 400 ms at 48 kHz)
- Tone Control (Bass/Treble) for Front L/R Channels
- 3-Mode Display Dimmer (Normal/Dim/Dimmer)
- 40 FM/AM Random Presets
- RIHD (Remote Interactive over HDMI) for System Control
- Compatible with RI (Remote Interactive) Dock for iPod/iPhone
- Full-Function RI Remote Control

HTP-591

7.1-Channel Home Theater Speaker System

SKF-591 2-Way Bass Reflex Front Speakers

- 5" (12 cm) OMF Diaphragm Woofer
- 1" (2.5 cm) Balanced-Dome Tweeter
- Max. Input Power: 130 W
- Gloss-Finished Top Panel

SKC-591IN 2-Way Bass Reflex Center Speaker

- 3 1/4" (8 cm) Cone Woofer x 2
- 1" (2.5 cm) Balanced-Dome Tweeter
- Max. Input Power: 130 W
- Gloss-Finished Side Panels

SKR-590/SKB-590 Full-Range Acoustic-Suspension Surround/Surround Back Speakers

- 3 1/4" (8 cm) Cone
- Max. Input Power: 130 W

Note: All speakers feature an impedance of 6 Ohms and color-coded speaker terminals.

SKW-591 Bass Reflex Powered Subwoofer

- 10" (25 cm) Cone
- Rated Output Power: 120 W (Minimum Continuous Power, 4 Ohms, 100 Hz, 1%, FTC)
- Energy-Saving Power Amplifier
- Down-Firing



HT-S5600 7.1-Channel Home Theater Receiver/Speaker Package

HDMI® for High Resolution Playback

The supplied receiver features four HDMI inputs to accept hi-res content from your media players and gaming consoles. HDMI enables Dolby® TrueHD and DTS-HD Master Audio™ surround-sound formats, and supports 3D video playback. The single output has an Audio Return Channel, so you can enjoy TV programs with home theater sound.

Wireless Streaming via Optional Adapter

With an aptX® enhancement codec and improved capabilities of Bluetooth Version 3.0, the UBT-1 adapter offers wireless sound quality approaching that of CD audio. Simply plug it into the USB port to send audio from a range of electronic devices, including phones, tablets, and laptop computers.

Overlaid Menu via HDMI for Quick Adjustment

Touch a button on your remote to overlay menus on the program being viewed. From here, you can gain access to frequently used AV settings without interruption to your viewing. The Home Menu button features simple icons for choosing a media source, and more detailed menus for system adjustment.

An Introduction to Onkyo Home Theater Sound

Onkyo's WRAT (Wide Range Amp Technology) enhances audio fidelity across a wide frequency range. It includes low-negative-feedback amp topology for clear, true-to-life sound; closed ground-loop circuits to reduce noise; and high instantaneous-current capability to handle big dynamic gains. WRAT amps feature a discrete output stage for longer life and cooler running.

Dolby® Pro Logic® IIz Delivers More Enveloping Soundstage

Pro Logic IIz creates a surround-sound experience from any movie or music source—even a stereo one. The system incorporates two Front Height speakers to carry ambient audio effects in a vertical dimension for more realistic action.

Audyssey 2EQ®

Audyssey 2EQ calibrates your speakers and equalizes your system to sound for the shape of your room. Measuring multiple listening positions, the system applies filters to satellite speakers to create a balanced soundstage.

Audyssey Dynamic EQ®

Dynamic EQ solves the problem of deteriorating sound quality at low volume. It selects the best possible frequency response and surround levels moment-by-moment, resulting in an optimal listening experience at all volumes.

Audyssey Dynamic Volume®

Audyssey Dynamic Volume automatically compensates for volume fluctuations in different audio content—for example, during noisy commercial breaks—and adjusts the volume in real time.

Good Quality Digital-to-Analog Converter

This receiver employs a 192 kHz/24-bit TI Burr-Brown DAC for excellent dynamic performance and improved tolerance to clock jitter, which translates as clearer, more expressive sound from your speakers.

Clearer Sound with Direct-Digital USB

This receiver features a front-panel USB port to connect iPod/iPhone® and mass storage devices loaded with music in a variety of digital formats. The connection carries signals from your portable device to the receiver in digital form, giving a noticeable boost to audio quality.

Quality Speakers for Quality Sound

A carefully matched Onkyo speaker set delivers clear, dynamic audio reproduction. Solid two-way front speakers feature a 5" (12 cm) OMF woofer and a balanced-dome tweeter for clear, well-separated highs. The center speaker boasts twin 3 1/4" (8 cm) woofers and dome tweeter to boost the audibility of dialog in movies and TV, while an efficient 120 W subwoofer rounds out the package.

Multi-Zone Powered Audio and Zone 2 Line-Outs

This receiver features Powered Zone 2 speaker terminals and Zone 2 line-outs. This means you can drive audio in another room equipped with stereo speakers—for example, in an adjoining room, or on the deck, or in the kitchen.

More Realistic Action with Four Different Gaming Modes

Select from four optimized audio modes to match your gaming content for a realistic surround sound experience. Rock, Sports, Action, and RPG game modes bring out the best in any soundtrack, from subtle ambient effects to thundering explosions.

SPECIFICATIONS

A/V RECEIVER

Amplifier Section

Power Output

Front L/R	130 W/Ch (6 Ohms, 1 kHz, 1% THD, 1 Channel Driven) 80 W/Ch (8 Ohms, 20 Hz–20 kHz, 0.7% THD, 2 Channels Driven, FTC) 130 W (6 Ohms, 1 kHz, 1% THD, 1 Channel Driven) 80 W (8 Ohms, 20 Hz–20 kHz, 0.7% THD, 2 Channels Driven, FTC)
Center	130 W/Ch (6 Ohms, 1 kHz, 1% THD, 1 Channel Driven) 80 W/Ch (8 Ohms, 20 Hz–20 kHz, 0.7% THD, 2 Channels Driven, FTC)
Surround L/R	130 W/Ch (6 Ohms, 1 kHz, 1% THD, 1 Channel Driven) 80 W/Ch (8 Ohms, 20 Hz–20 kHz, 0.7% THD, 2 Channels Driven, FTC)
Surround Back L/R	130 W/Ch (6 Ohms, 1 kHz, 1% THD, 1 Channel Driven) 80 W/Ch (8 Ohms, 20 Hz–20 kHz, 0.7% THD, 2 Channels Driven, FTC)

Dynamic Power

180 W (3 Ohms, Front)
160 W (4 Ohms, Front)
100 W (8 Ohms, Front)

THD+N (Total Harmonic Distortion + Noise)

0.08% (20 Hz–20 kHz, Half Power)

Damping Factor

60 (Front, 1 kHz, 8 Ohms)

Input Sensitivity and Impedance

200 mV/47 k-ohms (Line)

Rated RCA Output Level and Impedance

200 mV/2.2 k-ohms (Rec Out)

Maximum RCA Output Level and Impedance

2.0 V/2.2 k-ohms (Rec Out)

Frequency Response

5 Hz–100 kHz/±1 dB, -3 dB (DSP Bypass)
--

Tone Control

±10 dB, 20 Hz (Bass)
±10 dB, 20 kHz (Treble)

Signal-to-Noise Ratio

100 dB (Line, IHF-A)

Speaker Impedance

6 Ohms–16 Ohms

Video Section

Input Sensitivity/Output Level and Impedance

Video	1.0 Vp–p/75 Ohms (Component Y)
	0.7 Vp–p/75 Ohms (Component Pb/Cb, Pr/Cr)
	1.0 Vp–p/75 Ohms (Composite)

Component Video Frequency Response

5 Hz–100 MHz/±0 dB, -3 dB

Tuner Section

Tuning Frequency Range

FM	87.5 MHz–107.9 MHz
AM	530 kHz–1,710 kHz

FM/AM Preset Memory

40 Stations

General

Power Supply	AC 120 V~, 60 Hz
Power Consumption	5.0 A
Dimensions (W x H x D)	17 1/8" x 5 7/8" x 12 15/16" (435 x 150 x 328 mm)
Weight	18.3 lbs. (8.3 kg)

SPEAKER SYSTEM

Speaker Type	
Front	2-Way, Bass Reflex
Center	2-Way, Bass Reflex
Surround	Full-Range, Acoustic-Suspension
Surround Back	Full-Range, Acoustic-Suspension
Subwoofer	Bass Reflex, Powered

Drivers

Front	5" (12 cm) OMF Diaphragm Woofer 1" (2.5 cm) Balanced-Dome Tweeter
Center	3 1/4" (8 cm) Cone Woofer x 2 1" (2.5 cm) Balanced-Dome Tweeter
Surround	3 1/4" (8 cm) Cone
Surround Back	3 1/4" (8 cm) Cone
Subwoofer	10" (25 cm) Cone

Frequency Response

Front	55 Hz–50 kHz
Center	65 Hz–50 kHz
Surround	80 Hz–20 kHz
Surround Back	80 Hz–20 kHz
Subwoofer	25 Hz–150 Hz

Output Sound Pressure Level

Front	84.5 dB/W/m
Center	86 dB/W/m
Surround	81 dB/W/m
Surround Back	81 dB/W/m

Max. Input Power

Front/Center/Surround/Surround Back	130 W
-------------------------------------	-------

Rated Output Power

Subwoofer	120 W (Minimum Continuous Power; 4 Ohms, 100 Hz, 1%, FTC)
-----------	--

Nominal Impedance

Front/Center/Surround/Surround Back	6 Ohms
-------------------------------------	--------

Input Sensitivity/Impedance

Subwoofer	540 mV/20 k-ohms
-----------	------------------

General

Dimensions (W x H x D)

Front	6 1/8" x 14 7/8" x 6 5/8" (155 x 378 x 169 mm)
Center	16 9/16" x 4 1/2" x 4 11/16" (420 x 115 x 119 mm)
Surround	4 1/2" x 9 1/16" x 3 3/4" (115 x 230 x 96 mm)
Surround Back	4 1/2" x 9 1/16" x 3 3/4" (115 x 230 x 96 mm)
Subwoofer	12 1/2" x 18 7/16" x 15 11/16" (317.5 x 468 x 398 mm)

Weight

Front	5.7 lbs. (2.6 kg)
Center	5.1 lbs. (2.3 kg)
Surround	2.2 lbs. (1.0 kg)
Surround Back	2.2 lbs. (1.0 kg)
Subwoofer	20.1 lbs. (9.1 kg)

CARTON

Dimensions (W x H x D)	30 1/8" x 30 1/4" x 18 3/4" (772 x 768 x 477 mm)
Weight	76.1 lbs. (34.5 kg)

UPC CODE

(B)	751398011269
-----	--------------


Supplied Accessories

- Indoor FM Antenna • AM Loop Antenna
- Color-Coded Speaker Cables • Subwoofer Cable
- Speaker Set-Up Microphone • Instruction Manual
- Quick Start Guide • Remote Controller • AA (R6) Batteries x 2

HT-R592



Front View

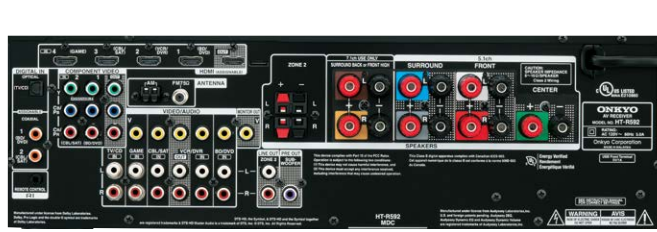

Rear View

Due to a policy of continuous product improvement, Onkyo reserves the right to change specifications and appearance without notice. Manufactured under license from Dolby Laboratories. Dolby, Pro Logic, and the double-D symbol are trademarks of Dolby Laboratories. DTS, DTS-HD, the Symbol, & DTS or DTS-HD and the Symbol together are registered trademarks of DTS, Inc. © DTS, Inc. All rights reserved. Manufactured under license from Audyssey Laboratories, Inc. U.S. and foreign patents pending. Audyssey 2EQ, Audyssey Dynamic EQ, and Audyssey Dynamic Volume are registered trademarks of Audyssey Laboratories, Inc. HDMI, the HDMI logo, and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries. iPhone, iPod, iPod classic, iPod nano, iPod shuffle, and iPod touch are trademarks of Apple Inc., registered in the U.S. and other countries. "Made for iPod" and "Made for iPhone" mean that an electronic device has been designed to connect specifically to iPod or iPhone, respectively, and has been certified by the developer to meet Apple performance standards. Apple is not responsible for the operation of this device or its compliance with safety and regulatory standards. Please note that the use of this device with iPod or iPhone may affect wireless performance. xx.Color is a trademark of Sony Corporation. WRAT, Music Optimizer, CinemaFILTER, OMF, and Theater-Dimensional are trademarks of Onkyo Corporation. All other trademarks and registered trademarks are the property of their respective holders.

ONKYO

Onkyo Corporation, Kitahama Chuo Bldg. 2-2-22 Kitahama, Chuo-ku, Osaka 541-0041 JAPAN <http://www.onkyo.com/>
Onkyo U.S.A. Corporation 18 Park Way, Upper Saddle River, N.J. 07458, U.S.A. Tel: 1-201-785-2600 or 800-229-1687 (Toll free) Fax: 1-201-785-2650 <http://www.onkyousa.com/>
Mexico: Representaciones de Audio, S.A. de C.V. Calle 10 No. 133 Col. Granjas San Antonio Del. Iztapalapa C.P. 09070 Mexico, D.F. MEXICO Tel: +52-55-3300-4550 Fax: +52-55-3300-4559
Brazil: Discos Comerciais Ltda. Av. Brig. Faria Lima, No. 1.461-Torre Sul-jl 151-154 Sao Paulo-SP BRAZIL, CEP 01452-002 Tel: +55-11-3811-7272 Fax: +55-11-3811-7265 <http://www.discos.com.br/>