

IC-36RID



## FEATURES

All-refrigerator storage solves capacity problems

Every Sub-Zero integrated refrigerator or freezer comes ready to be fitted with custom panels and handles for seamless installation with surrounding cabinetry

Air purification system fights spoilage, odors

Internal water dispenser works with seamless design

Nano-coated spill-proof shelves for easy clean-up

Smart-touch controls for streamlined access to more settings

Water-filtration system reduces contaminants, chlorine taste and odor

Rigorously tested in our U.S. manufacturing facilities to ensure at least 20 years of heavy use

Exceptional 24/7 support from our Customer Care team based in Madison, Wisconsin and just footsteps from our factory

Soft-close doors and drawers

## ACCESSORIES

Dual installation kits

Stainless steel front panels with tubular or pro handles

Stainless steel kickplate

Stainless steel pro handles

Stainless steel tubular handles

Dozen egg container

Replacement air purification cartridge

Replacement water filter

Accessories are available through an authorized Sub-Zero dealer. For local dealer information, visit [subzero-wolf.com/locator](http://subzero-wolf.com/locator).



## HANDLE ACCESSORIES

PRO



TUBULAR



## PRODUCT DETAILS

### REFRIGERATOR

- 3 Adjustable glass shelves
- 2 Crisper drawers with dividers
- Deli drawer with dividers
- 3 Adjustable door shelves
- 2 Stationary door shelves
- Adjustable dairy compartment

# 36" INTEGRATED COLUMN REFRIGERATOR WITH INTERNAL DISPENSER - PANEL READY





## PRODUCT SPECIFICATIONS

|                       |   |
|-----------------------|---|
| Model                 | IC-36RID  |
| Dimensions            | 36"W x 84"H x 24"D                                    |
| Door Clearance        | 34 1/2"   |
| Weight                | 460 lb  |
| Refrigerator Capacity | 20.5 cu ft  |
| Electrical Supply     | 115 VAC, 60 Hz  |
| Electrical Service    | 15 amp dedicated circuit                              |
| Plumbing Supply       | 1/4" OD copper, braided stainless steel or PEX tubing |
| Plumbing Pressure     | 35–120 psi  |

## ELECTRICAL


## PLUMBING



## PANEL SPECIFICATIONS



For complete panels specifications including width/height, weight requirements and thickness requirements visit [subzero-wolf.com/integratedconfigurator](http://subzero-wolf.com/integratedconfigurator).

## INTERIOR VIEW

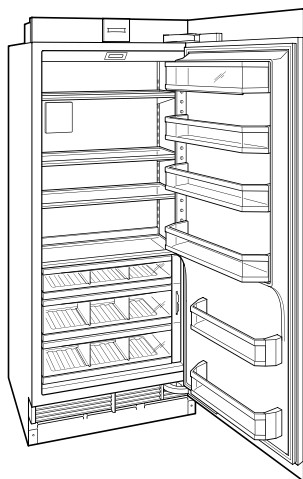


This illustration is intended for interior reference only and may not represent the exterior of the model being specified.

## DIMENSIONS

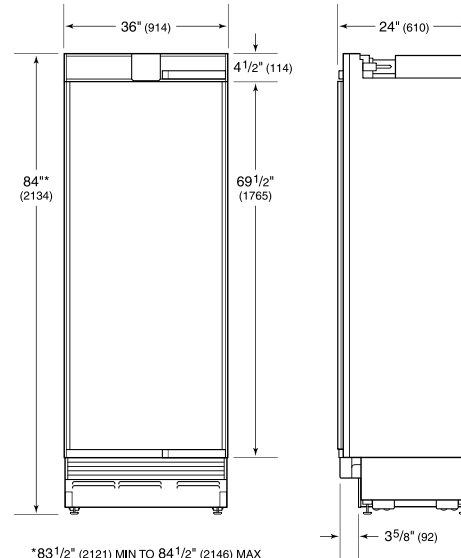

## STANDARD INSTALLATION

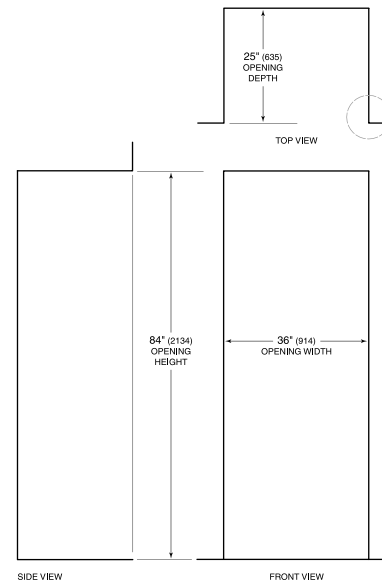

NOTE: 3/2" (89) finished returns will be visible and should be finished to match cabinetry.

