


FEATURES

- Heavy-duty, stainless steel seamless construction with glass edge.
- Internal, in-line or remote blower required (sold separately).
- Telescopic chimney.
- Front-mounted controls with LED indicator lights.
- Three-speed blower with boost to temporarily increase airflow.
- LED lighting with high and low settings.
- Delay-off feature to automatically turn unit off.
- Filter clean indicator.
- Dishwasher-safe filters.
- Transition with backdraft damper.

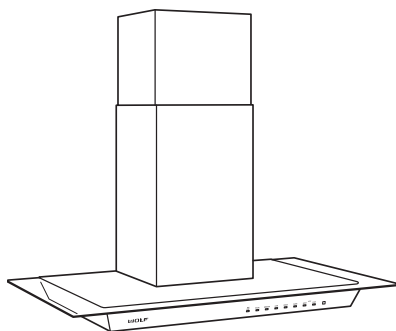

Model VW36G

BLOWER OPTIONS

MODEL VW36G	CFM
Internal	300*, 600
In-line	600
Remote	600

**For make-up air restricted applications.*

Cooktop hoods are recommended for use with Wolf induction, electric and gas cooktops and integrated modules. For Wolf ranges and rangetops, a pro ventilation hood is recommended.

ACCESSORIES

- Internal, in-line and remote blowers (refer to chart).
- Remote control.
- Chimney extension.
- 30" high stainless steel wall shield.
- Recirculating kit and filter for non-ducted applications.
- Make-up air damper.

Accessories available through an authorized Wolf dealer. For local dealer information, visit the find a showroom section of our website, wolfappliance.com.

SPECIFICATIONS

PRODUCT

Dimensions 36"W x 21¹/₄"H x 19¹/₄"D
 Overall Height 31³/₈" – 41¹/₂"
 Weight 57 lb

DISCHARGE

Vertical 6" Round

ELECTRICAL

Supply 110/120 VAC, 60 Hz
 Service 15 amp circuit


INSTALLATION

Bottom of Hood to Countertop 30" – 36"


Specifications are subject to change without notice. Visit wolfappliance.com/specs for the most up-to-date information.

Dimensions may vary $\pm 1/8$ " (3). Dimensions in parentheses are millimeters unless otherwise specified.

DIMENSIONS

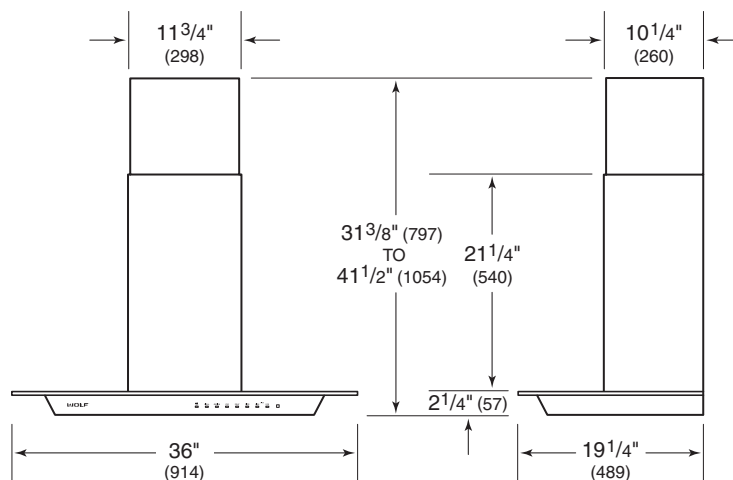

ELECTRICAL LOCATION

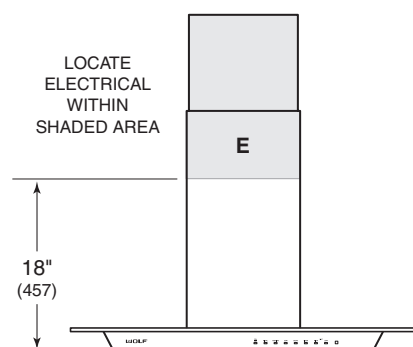

30" (762) TO 36" (914) BOTTOM EDGE TO COUNTERTOP