

IW-30



FEATURES


- Custom front panel and hardware allow for infinite design options.
- Dual evaporators provide constant, moderate humidity so corks don't dry out
- Two independent temperature zones hold reds and whites at proper serving temperature
- Bronze-tinted, UV-resistant glass protects against light exposure
- Soft-on LED lighting illuminates gradually
- Home security system connection
- Wine racks accommodate 750 ml bottles, half-bottles and magnums.
- Intuitive touch control panel keeps temps within one degree of set point
- Rigorously tested in our U.S. manufacturing facilities to ensure at least 20 years of heavy use
- Exceptional 24/7 support from our Customer Care team based in Madison, Wisconsin and just footsteps from our factory
- Star-K compliant with installation of a harness kit.
- Illuminated display rack for prized bottles of wine.
- Full-extension, easy-glide racks provide access without agitating wine
- New inventory tiles system lets you label wine racks for easy ID

ACCESSORIES

- Cherrywood Humidor
  - Bulk storage drawer for wine in nontraditional containers
  - Dessert wine shelf for storage of smaller bottles
  - Dual installation kit for installation with another wine or integrated model
  - Stainless steel front panels with tubular or pro handles
  - Inventory tiles
  - Door lock
  - Stainless steel tubular and pro handles
  - Reduced toe kick divider for toe kicks from 3.875" to 2"
  - Side enclosure
  - Solid overlay door
  - Top enclosure
- Accessories are available through an authorized Sub-Zero dealer.  
For local dealer information, visit [subzero-wolf.com/locator](http://subzero-wolf.com/locator).




HANDLE ACCESSORIES

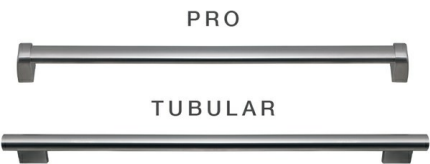


PRODUCT SPECIFICATIONS

Model	IW-30
Dimensions	30"W x 84"H x 24"D
Door Clearance	28 1/2"
Weight	460 lb
Electrical Supply	115 VAC, 60 Hz
Electrical Service	15 amp dedicated circuit

ELECTRICAL




INTERIOR VIEW

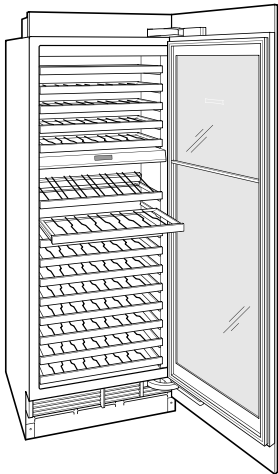

This illustration is intended for interior reference only and may not represent the exterior of the model being specified.

DIMENSIONS

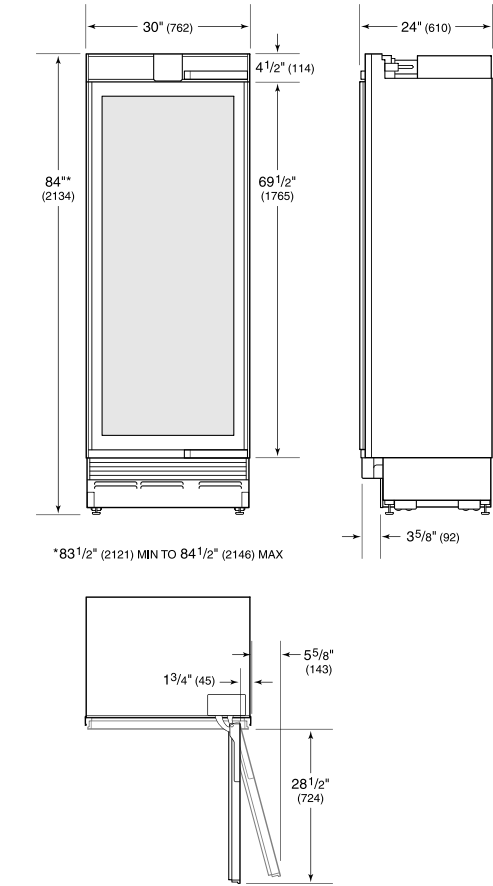

STANDARD INSTALLATION

