

subzero.com

FEATURES

- Four design options: framed, overlay, flush inset and stainless steel.
- Electronic microprocessor constantly monitors entire unit to ensure proper food storage environment.
- · Advanced water filtration system.
- Illuminated touch control panel.
- Bright interior lighting throughout, including storage drawer area.
- Adjustable wire shelves and door shelves.
- Easy-access flip-up grille.
- Automatic ice maker provides crescentshaped ice—max ice feature increases production for a 24-hour period.



MODEL OPTIONS

OVERLAY

Framed, overlay, flush inset BI-36F/O

STAINLESS STEEL

Tubular handle BI-36F/S/TH Pro handle BI-36F/S/PH



FREEZER

- 3 Adjustable wire shelves
- 1 Stationary glass shelf
- 3 Storage drawers with dividers
- 5 Adjustable door shelves

ACCESSORIES

- Grilles for 83" or 88" finished height (84" is standard).
- Framed front panel in white or stainless steel.
- Flush inset and dual flush inset panels in stainless steel with tubular or pro handle.
- · Custom front panel mounting kit.
- Side panel in white or stainless steel.
- Stainless steel tubular and pro handles.
- Full-length standard and extended framed handles.
- · Stainless steel kickplate.
- Dual installation kit with or without dual wide grille—84" finished height.
- Retrofit kit for 600 series panels.
- Replacement water filter.

Accessories available through an authorized Sub-Zero dealer. For local dealer information, visit the find a showroom section of our website, subzero.com.







SUB*ZERO


subzero.com


SPECIFICAT	IONS
PRODUCT Dimensions Weight	36"W x 84"H x 24"D 406 lb
CAPACITY Freezer	22.7 cu ft
ELECTRICAL Supply Service	115 VAC, 60 Hz 15 amp circuit
PLUMBING Supply Pressure	¹ / ₄ " OD copper, braided stainless steel or PEX tubing 35–120 psi

Specifications are subject to change without notice. Visit subzero.com/specs for the most up-to-date information.


Dimensions may vary $\pm 1/8$ " (3). Dimensions in parentheses are millimeters unless otherwise specified.

DIMENSIONS






ELECTRICAL




PLUMBING




STANDARD INSTALLATION

FLUSH INSET INSTALLATION

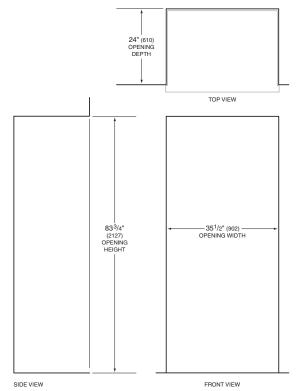

NOTE: Shaded line represents profile of unit.

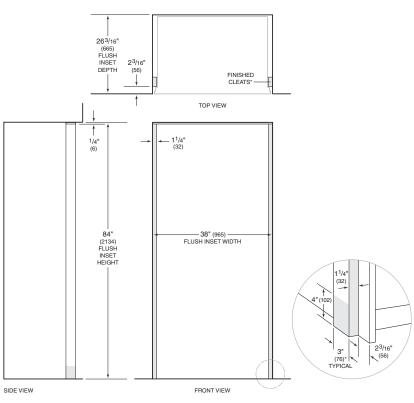

*3" (76) typical depth. Shaded areas will be visible and should be finished to match cabinetry. NOTE: Shaded line represents profile of unit with 3/4" (19) panel.

2/2014 ©Sub-Zero, Inc. all rights reserved.