

Cooktop Low-Profile Island Hood

Behind the contemporary lines of the Wolf cooktop low-profile hoods, there's a lot of hard-nosed functional thinking. Brilliant halogen lighting illuminates your cooking surface. Powerful multi-speed blowers whisk away smoke and odors. The low-profile island hood is stainless steel with a black glass front panel and is recommended for use with Wolf induction, electric and gas cooktops and integrated modules.



FEATURES

- Heavy-duty stainless steel construction.
- Telescopic flue fits 8' to 9' ceilings.
- Front-mounted electronic controls with digital indicator and four-speed blower control.
- Sealed halogen lighting with three settings.
- Island hood can be used in a non-ducted application using an accessory charcoal recirculating filter.
- Heat sentry feature automatically turns unit on when heat is sensed and automatically adjusts blower speed.
- Delay-off mode automatically turns unit off.
- Stainless steel filter cover with dishwasher-safe aluminum mesh filter.
- Filter clean indicator lets you know when the filter needs cleaning.
- Transition with backdraft damper included.





Sealed halogen lighting.

Electronic controls.

MODEL CTEIH42I Overall Width 42" 500 CFM Internal Blower Included •

ACCESSORIES

- Recirculating kit for non-ducted installations.
- Replacement charcoal filters.

Accessories are available through your authorized Wolf dealer. For local dealer information, visit the find a showroom section of our website, wolfappliance.com.



Model CTEIH42I
Cooktop Low-Profile Island Hood



Cooktop Low-Profile Island Hood

OVERALL DIMENSIONS 10⁷/8" 121/8" (308)(276)21/8" (54) TO 15¹/2" (394) 281/4" (718) TO 41¹/2" (1054) OVERALL 227/8" HEIGHT (581) 31/8" (79) 42" (1067) 215/8" (549) OVERALL WIDTH OVERALL DEPTH Unit dimensions may vary by $\pm \frac{1}{8}$ ".

SPECIFICATIONS

Exterior Finish	Stainless Steel
Overall Width	42"
Height (excluding chimney)	31/8"
Min Height (including chimne	y) 28 ¹ / ₄ "
Max Height (full extension)	41 1/2"
Overall Depth	21 ⁵ /8"
Bottom of Hood to Counterto	p 24" to 30"
Discharge	Vertical
Duct Size	6" Round
Electrical Requirements 60 Hz, 15 amp d	110/120 V AC ledicated circuit
Shipping Weight	92 lbs


INSTALLATION NOTES

Island hood includes a 500 CFM internal blower. For blower recommendations, visit our website, wolfappliance.com.

Cooktop low-profile hoods are recommended for use with Wolf induction, electric and gas cooktops and integrated modules. For Wolf ranges and rangetops, a pro ventilation hood is recommended.

Complete installation specifications can be found on our website, wolfappliance.com.

INSTALLATION SPECIFICATIONS

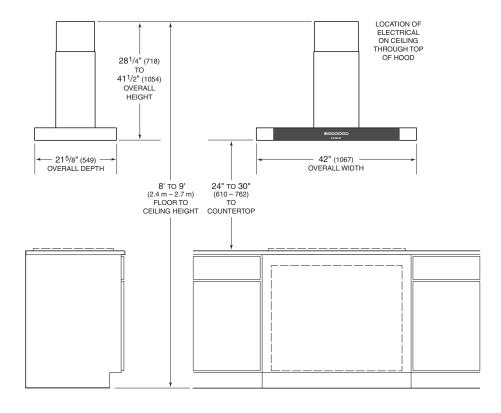

Dimensions in parentheses are in millimeters unless otherwise specified.