



30" Sealed Burner Rangetop

The patented, dual-stacked sealed gas burners of our new sealed burner rangetop take control to a new level. Two levels, really. The upper-tier burner delivers maximum heat transfer at higher settings; the lower-tier continuous flame ably handles the subtleties of simmering and melting. Patented features ensure this rangetop stands out from the rest in performance and also beauty. Available in natural or LP gas.



Model SRT304

FEATURES

- Stainless steel exterior finish with island trim included.
- Distinctive red control knobs—black knobs optional.
- Platinum bezels surround all knobs—chrome or brass bezels optional.
- Dual-stacked, sealed burners, all with simmer capabilities and automatic reignition at all settings.
- Melt feature on 9,200 Btu burner.
- Porcelain-coated cast iron continuous grates.

SURFACE FEATURES

Model	SRT304
Surface Burners	
15,000 Btu high / 950 Btu simmer	3
Surface Burner	
9,200 Btu high / 325 Btu simmer	1

Model number is for natural gas sealed burner rangetop, add (-LP) to the model number for LP gas.

ACCESSORIES

- Stainless steel risers in 5" and 10", or 20" riser with shelf.
- Black control knobs.
- Chrome or brass bezels.
- Porcelain-cast wok grate and single burner grate.
- Porcelain-cast two-burner S-grates—center S-grate also available.

Accessories are available through your authorized Wolf dealer. For local dealer information, visit the find a showroom section of our website, wolfappliance.com.



This appliance is certified by Star-K to meet strict religious regulations in conjunction with specific instructions found on www.star-k.org.




Dual-stacked sealed burner.



30" Sealed Burner Rangetop

OVERALL DIMENSIONS

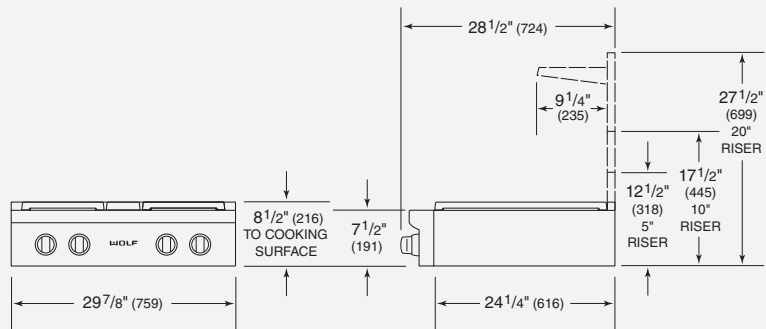


Unit dimensions may vary by $\pm 1/8$ ".

SPECIFICATIONS

Exterior Finish	Stainless Steel
Overall Width	29 ⁷ / ₈ "
Overall Height (to cooking surface)	8 ¹ / ₂ "
Overall Depth	28 ¹ / ₂ "
Opening Width	30"
Opening Height (to countertop)	7 ¹ / ₂ "
Opening Depth	24"
Electrical Requirements	110/120 V AC 50/60 Hz, 15 amp circuit
Power Cord	6' cord with grounded plug
Shipping Weight	160 lbs

INSTALLATION SPECIFICATIONS

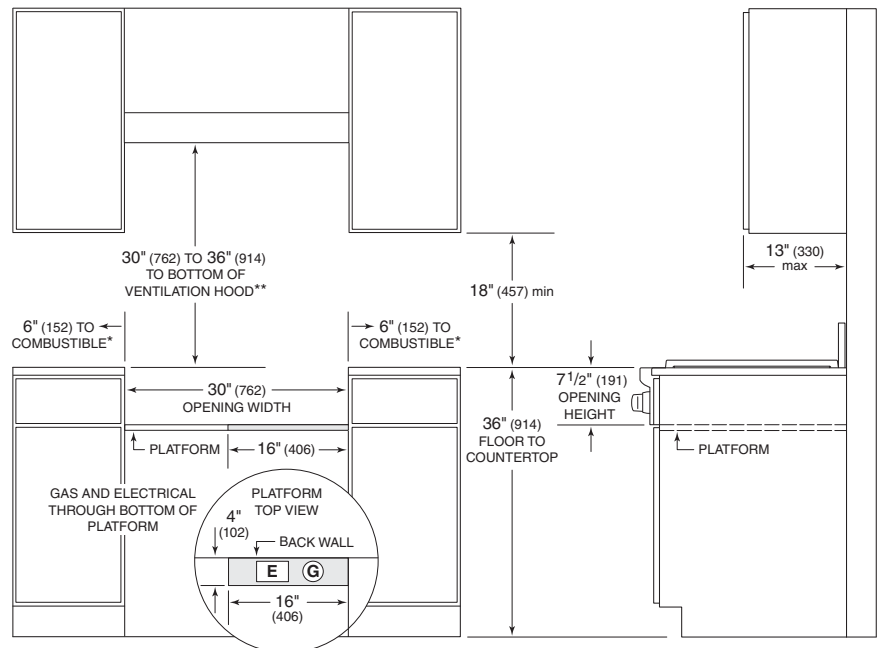

*Minimum clearance from rough opening to combustible materials up to 18" (457) above countertop.

**36" (914) minimum clearance from countertop to combustible materials without ventilation hood.

NOTE: For island installations, 12" (305) minimum clearance from back of rangetop to combustible rear wall above countertop.

INSTALLATION NOTES

- A Wolf pro wall, chimney, island ventilation hood or hood liner is recommended.
- For LP gas installations above 8,600' a high altitude conversion kit is required. For natural gas installations above 10,250', contact your authorized Wolf dealer.

Dimensions in parentheses are in millimeters unless otherwise specified.