


DATA SHEET

36" PERIMETER INSERT RANGE HOOD


Model no:

HP36ILTX1


(refer page 3 for metric measurements)

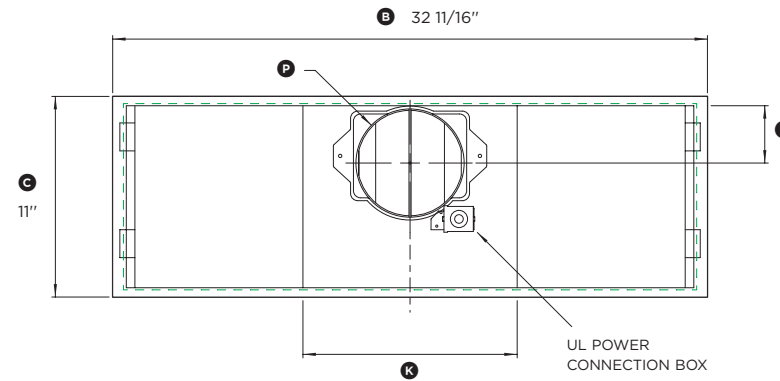

PLAN VIEW

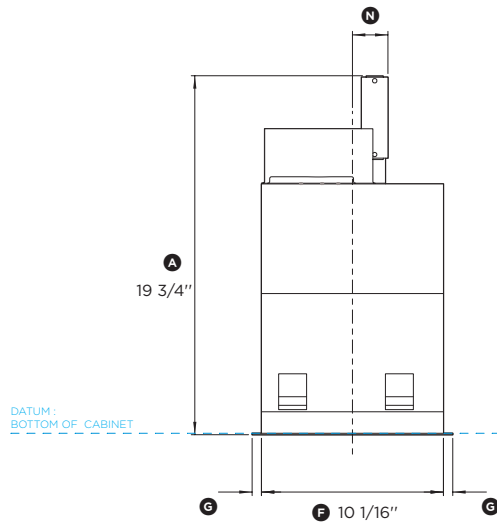

FRONT VIEW

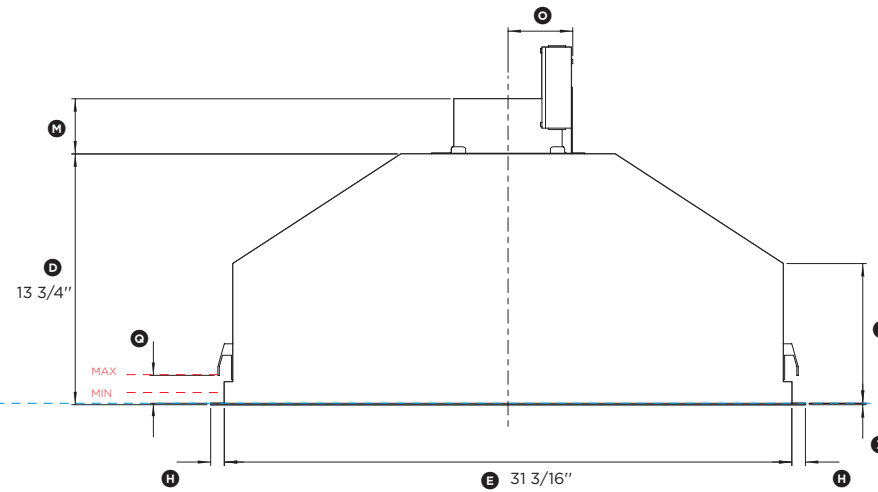

PROFILE VIEW

Product Dimensions	in
Ⓐ Overall height of range hood	19 3/4"
Ⓑ Overall width of range hood	32 11/16"
Ⓒ Overall depth of range hood	11"
Ⓓ Height of range hood chassis	13 3/4"
Ⓔ Width of range hood chassis	31 3/16"
Ⓕ Depth of range hood chassis	10 1/16"
Ⓖ Depth of flange	1/2"
Ⓗ Width of flange	3/4"
Ⓘ Thickness of flange	1/16"
Ⓛ Height of side of chassis	7 11/16"
Ⓚ Width of top of chassis	11 3/4"
Ⓛ Distance from ducting outlet center to rear of chassis	3 1/8"
Ⓜ Height of ducting adaptor	3"
Ⓜ Distance from hood centerline to front of power connection box	1 15/16"
Ⓜ Distance from hood centerline to side of power connection box	3 9/16"
Ⓟ Diameter of ducting outlet	6"
Ⓟ Height adjustability of clip that secures range hood (cabinet base panel thickness)	min 9/16" - max 1 9/16"

Cutout Dimensions	in
Overall width of cutout*	31 1/2"
Overall depth of cutout*	10 1/4"


* Note cutout position is centered to the range hood width and depth.

Clearance Dimensions	in
Height from top of cooktop to base of product	26" - 30"

INDICATES CUTOUT -----
INDICATES CABINETRY / PRODUCT DATUM -----
INDICATES CABINETRY CLEARANCES -----

DATE: 02.09.2016

IMPORTANT NOTE: Throughout this guide, dimensions may vary by $\pm 2\text{mm}$ (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com




Fisher & Paykel

Model no:
HP36ILTX1
(refer page 4 for metric measurements)

Product Dimensions	in
Ⓐ Overall width of range hood	32 11/16"
Ⓑ Overall depth of range hood	11"
Ⓒ Distance from front of range hood to center of lights	1 9/16"
Ⓓ Distance between lights	26 9/16"

Cutout Dimensions	in
Overall width of cutout*	31 1/2"
Overall depth of cutout*	10 1/4"

* Note cutout position is centered to the range hood width and depth.

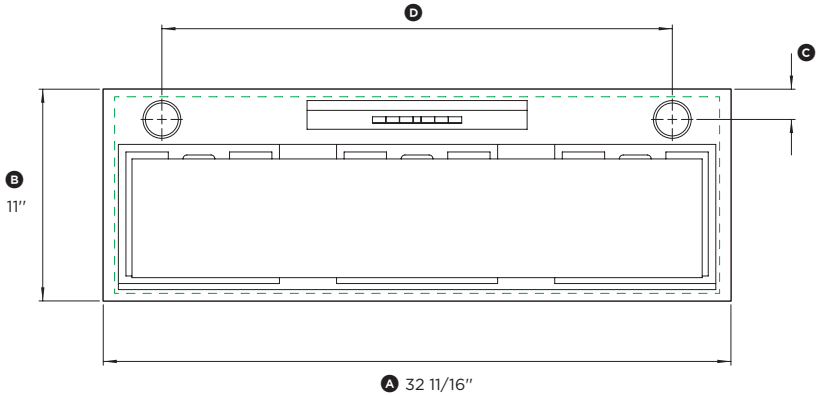


BOTTOM VIEW




INDICATES CUTOUT -----

DATE: 02.09.2016

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com



Model no:
HP36ILTX1
(refer page 1 for imperial measurements)

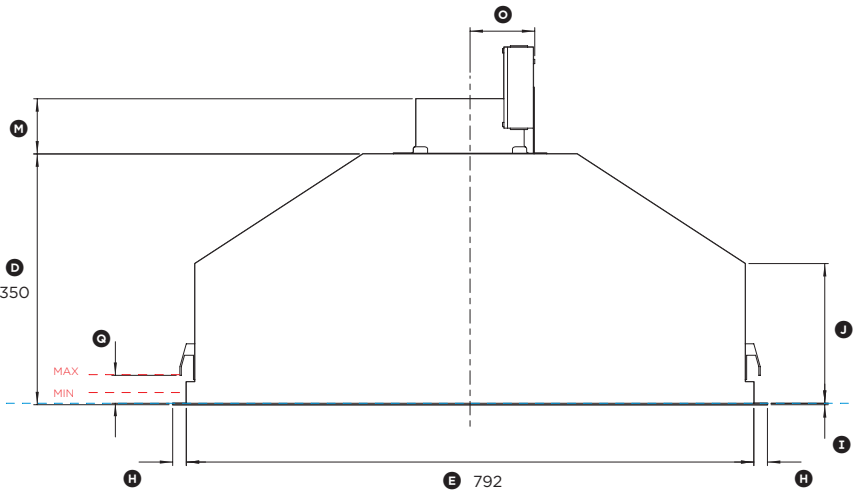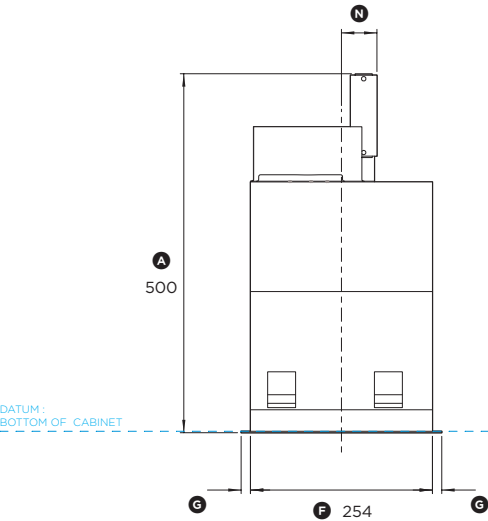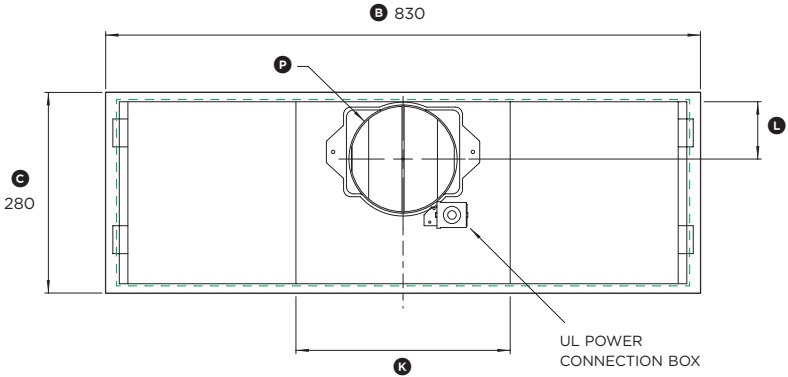

Product Dimensions	mm
Ⓐ Overall height of range hood	500
Ⓑ Overall width of range hood	830
Ⓒ Overall depth of range hood	280
Ⓓ Height of range hood chassis	350
Ⓔ Width of range hood chassis	792
Ⓕ Depth of range hood chassis	255
Ⓖ Depth of flange	13
Ⓗ Width of flange	19
Ⓘ Thickness of flange	2
Ⓢ Height of side of chassis	195
Ⓣ Width of top of chassis	298
Ⓛ Distance from ducting outlet centre to rear of chassis	80
Ⓜ Height of ducting adaptor	77
Ⓝ Distance from hood centreline to front of power connection box	50
Ⓞ Distance from hood centreline to side of power connection box	90
Ⓟ Diameter of ducting outlet	152
Ⓠ Height adjustability of clip that secures range hood (cabinet base panel thickness)	min 15 - max 40

Cutout Dimensions	mm
Overall width of cutout*	800
Overall depth of cutout*	260

* Note cutout position is centred to the range hood width and depth.

Clearance Dimensions	mm
Height from top of cooktop to base of product	660 - 762

INDICATES CUTOUT
INDICATES CABINETRY / PRODUCT DATUM
INDICATES CABINETRY CLEARANCES

DATE: 02.09.2016

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com




Model no:
HP36ILTX1
(refer page 2 for imperial measurements)

Product Dimensions	mm
Ⓐ Overall width of range hood	830
Ⓑ Overall depth of range hood	280
Ⓒ Distance from front of range hood to centre of lights	40
Ⓓ Distance between lights	675

Cutout Dimensions	mm
Overall width of cutout*	800
Overall depth of cutout*	260

* Note cutout position is centred to the range hood width and depth.

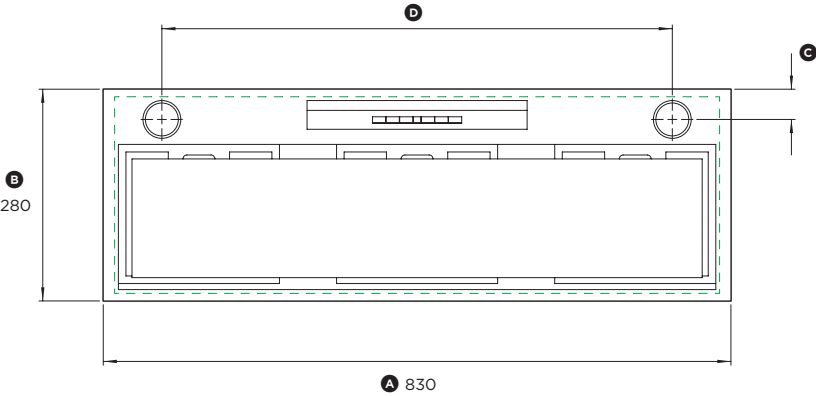

BOTTOM VIEW

INDICATES CUTOUT -----

DATE: 02.09.2016

IMPORTANT NOTE: Throughout this guide, dimensions may vary by $\pm 2\text{mm}$ (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

