




DESIGNER

LUX GLO
CONNECT


ISLAND

ZEPHYR

ZEPHYRONLINE.COM

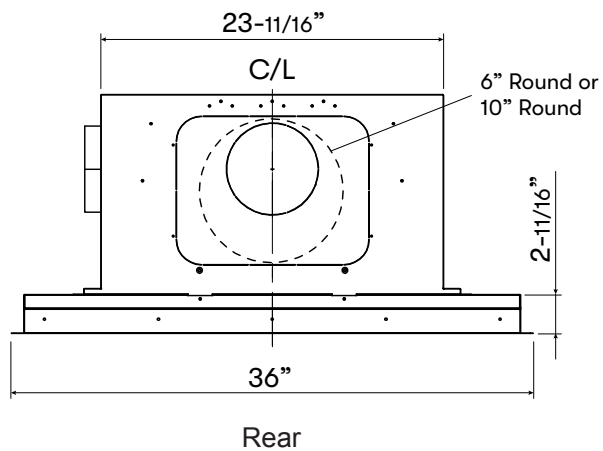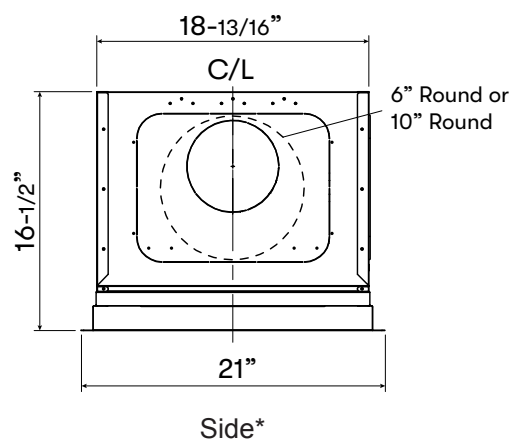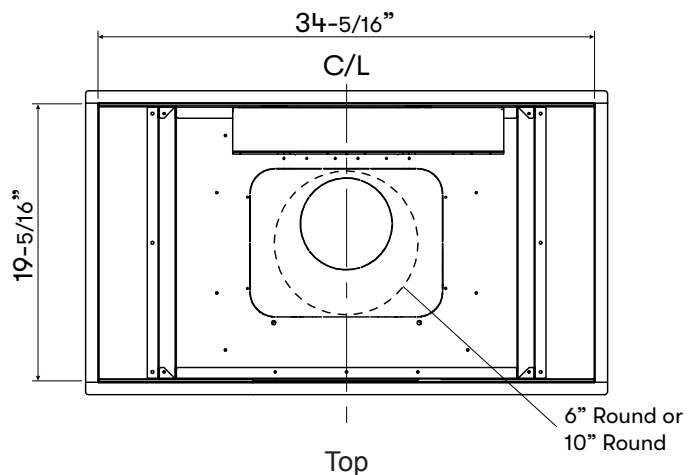

Includes Wireless Remote Control

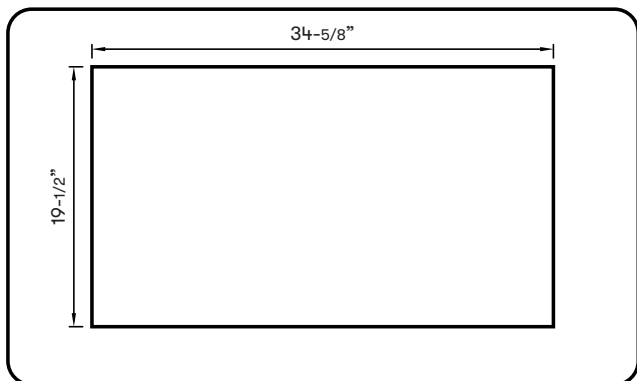

Cabinet Bottom Cut-Out Size (W x D): 34-5/8" x 19-1/2"

*Side ducting not compatible with the PBI dual blower

MODEL

White
Size

DLG-E36AWX
36"

PERFORMANCE

Internal Blower (CBI-290C)* 200-290 CFM, 1.4-3 sones
 Internal Blower (CBI-390A)* 200-390 CFM, 1.4-5 sones
 Internal Blower (CBI-600A)* 240-600 CFM, 1.8-6 sones
 Internal Blower (PBI-1100B)* 500-1,100 CFM, 3.5-8 sones
 In-Line Blower (PBN-1000A)* 500-1,000 CFM, sones NA
 External Blower (CBE-1000)* 500-1,000 CFM, sones NA

FEATURES

Zephyr Connect App Compatible Yes
 Alexa & Google Home Compatible Yes
 Controls Capacitive Touch
 Speed Levels 3
 Delay-Off Yes
 CleanAir Function** Yes
 Lighting Glo LED PAS Panel with TruHue™
 Tri-Level Lighting Yes
 TruHue™ Yes
 Filters Aluminum Mesh x3
 Perimeter Aspiration System Yes
 Wireless Remote Control Yes, RF
 Recirculating*** Yes
 ADA Compliant Yes

DUCT SPECIFICATIONS

Vertical Internal Blower 6"(CBI), 10"(PBI)
 Vertical In-Line/External Blower 10"
 Side Horizontal Internal Blower 6"(CBI)
 Side Horizontal In-Line/External Blower 10"
 Rear Horizontal Internal Blower 6"(CBI), 10"(PBI)
 Rear Horizontal In-Line/External Blower 10"

AC POWER

Hood w/ CBI-290C 120V, 60Hz, Max. 1.05A
 Hood w/ CBI-390A 120V, 60Hz, Max. 2.1A
 Hood w/ CBI-600A 120V, 60Hz, Max. 3.05A
 Hood w/ PBI-1100B 120V, 60Hz, Max. 5.75A
 Hood w/ PBN-1000A 120V, 60Hz, Max. 5.75A
 Hood w/ CBE-1000 120V, 60Hz, Max. 6.55A

OPTIONAL ACCESSORIES

Recirculating Kit ZRC-01LX
 Make-Up Air Kit MUA006A (600 CFM)
 MUA008A (1,000 CFM)
 MUA010A (1,100 CFM)

MOUNTING HEIGHT RANGE† 26" - 72"

WARRANTY 3 year parts, 1 year labor

CEILING HEIGHT	6'	6.5'	7'	7.5'	8'	8.5'	9'
MOUNTING HEIGHT†	36"	42"	48"	54"	60"	66"	72"

*Blower sold separately.

**CleanAir turns your hood on once every four hours for 10 minutes on speed one.

***Recirculating kit is only compatible with CBI-290C and CBI-600A blowers.

†Mounting height refers to distance between top of a 36" tall cooking surface and bottom of hood.



TruHue™

A bright idea: customize your hood's light to harmonize with the rest of your kitchen's lighting at the touch of a button—from 2700K, 3000K, 3500K, 4000K to 5000K.



Zephyr Connect App

Zephyr Connect App allows you to control your range hood from anywhere using your mobile device. It includes real time diagnostics and provides important product information. All you need is a WiFi connection with access to the internet. It seamlessly integrates with your smart devices such as Amazon Alexa or Google Home smart speaker for voice activation. Available to download from Google Play or the App Store.

DID YOU KNOW?

The Perimeter Aspiration System (PAS) moves airflow away from the central area of the hood and evenly distributes it through narrow openings around the perimeter of the hood. This ventilation method increases air velocity and improves the capture of cooking contaminants.

Specifications subject to change, check zephyronline.com for up-to-date information.
 Zephyr Ventilation | 2277 Harbor Bay Parkway, Alameda, CA 94502 | 888.880.VENT

NOV25.0101

