

LRIN6323YE

6.3 cu. ft. Induction Single Smart Range with Air Fry, ProBake Convection®, EasyClean®, Self-Clean and Premium Handle

6.3 cu. ft Capacity
 ProBake Convection® with Air Fry
 Air Fry Basket Included
 EasyClean® and Self Clean
 WideView™ Window
 LG ThinQ® with ThinQ Care
 Storage Drawer
 ENERGY STAR® Certified



AVAILABLE COLORS



ThinQ Care

Proactive Smart Alerts to Keep Your Appliances Running Smoothly

- Preventative Alerts help you stay a step ahead of potential issues to find proactive solutions before problems arise.
- Avoid preventable repairs and service calls with real-time diagnostics for a hassle-free experience.
- Integrated within LG's ThinQ app—a smart home hub for managing your smart devices and appliances.

SUMMARY

Type	Electric Single Oven
Total Oven Capacity (cu. ft.)	6.3
Available Colors	Stainless Steel,
COOKTOP	
Type	Induction
No of Radiant Elements	4
Element Size/ Wattage - Left Rear	1800(Boost)/ 1300(Normal) (6")
Element Size/ Wattage - Right Rear (Warm Zone)	-
Element Size/ Wattage - Left Front	3200(Boost)/ 2100(Normal) (8")
Element Size/ Wattage - Right Front	3900(Boost)/ 2400(Normal) (11")
Center (Warming Zone)	1800(Boost)/ 1300 (Normal) (6")
Hot Surface LED Indicator	Yes
OVEN FEATURES	
Broil Element (Watt)	Sheath (4.2Kw)
Oven Bake Element Wattage Convection (Watt)	Sheath 2500W
Convection Fan	Dual Speed (High/Low)
Convection Type	ProBake® Convection
Oven Mode	Bake, Convection Bake, Convection Roast, Broil High, Broil Low, Air Fry, Warm, EasyClean®, Self Clean
Oven Control Features	Keypad
Convection Conversion	Yes
EasyClean®	Yes
EasyClean® Time	10 mins
GoCook Smart Oven Light	1 Light
No. of Rack Positions	-
Door Lock	No
Automatic Safety Shut Down	After 12 Hours
InstaView	No

DRAWER FEATURES


Type	Storage
CONTROL FEATURES	
Cooktop Control Type	Knobs Control
Oven Control Type	Keypad
Display	White LED
Language	English
Clock	12hr or 24hr (Option)
Kitchen Timer	Yes
Timed Cook	Yes
Temperature Unit of Measure	Fahrenheit / Celsius
Cooking Complete Reminder	Beeper (Hi, Lo, Off)
Volume	
Certified Sabbath Mode	Yes
ThinQ® SMART FEATURES	
ThinQ® (Wi-Fi Enabled)	Yes
ThinQ Up	Yes
Check & Control	Yes
Voice Control	Google Assistant & Amazon Alexa
Proactive Customer Care	Yes
SmartDiagnosis™	Yes
APPEARANCE	
All Available Color	Stainless Steel
Knobs	NI-CR Plated (Weight)
Knobs Material	PC+ABS
Handle	Aluminum
Handle Material	Aluminum
Handle Type	Bar Type
PrintProof™ Finish	No
Oven Door Feature	WideView™ Window
Cooktop Finish	Stainless Steel

ACCESORIES

Standard Rack	Yes (2)
Air Fry Basket	Yes (1)
POWER/ RATINGS	
Amp Rating at 208V	45.4 A
Amp Rating at 240V	47.5 A
KW Rating at 208V	9.45kW
KW Rating at 240V	11.4W
Required Power Supply (amp)	40A
ENERGY	
ENERGY STAR® Certified	Yes
DIMENSIONS/ CLEARANCES/ WEIGHT	
Shipping Weight	215.2 lbs
Product Weight	182.1 lbs
Cabinet Width	30"
Overall Depth - without handle	26 3/4"
Overall Depth - with handle	29 1/8"
Overall Height	46 1/2"
Overall Width	30"
Oven Interior Dimensions (W x H x D)	24 27/32 x 17 7/8 x 22 1/16"
Height to Cooking Surface	36"
Drawer Dimensions (W x H x D)	22 3/8 x 4 x 14 11/16"
Carton Dimensions (W x H x D)	32 1/2 x 51 x 30 1/2"
LIMITED WARRANTY	
Parts & Labor	1 Year
UPC CODE	
LRIN6323YE	048231349642


LRIN6323YE

DIMENSION / CLEARANCES

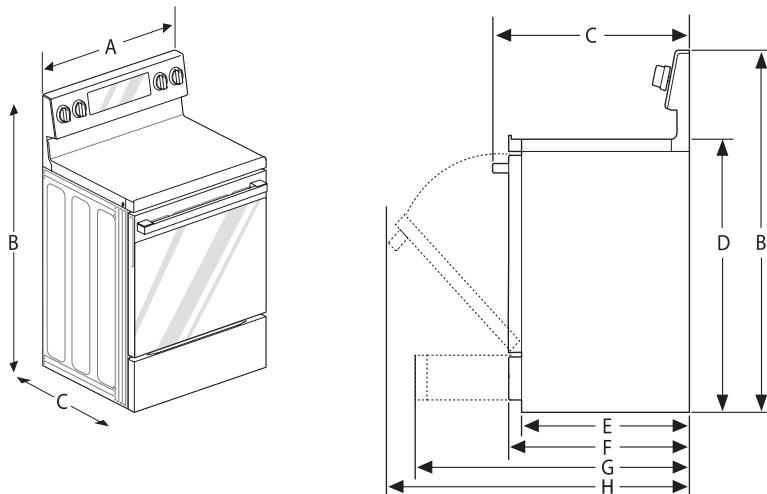

DIMENSIONS

A	Width	29 7/8" (759 mm)
B	Height	46 1/2" (1181 mm)
C	Depth (Includes Door Handle)	29 1/8" (740mm)
D	Height (Excludes Controller)	36" (914 mm)
Depth		
E	(Includes only the product body that is loaded into the cabinet. Excludes door, drawer, and handles)	24 5/8" (627 mm)
F	Depth (Excludes Door Handle)	26 3/4" (680 mm)
G	Depth when drawer is fully opened	36 13/16" (935mm)
H	Depth when door is fully opened	49 13/16" (1,265 mm)

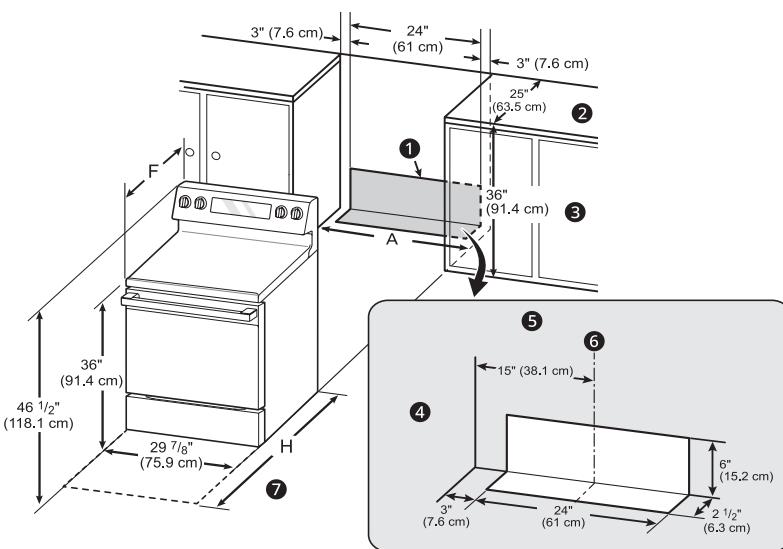

MINIMUM DIMENSIONS

①	Minimum distance from top of range to combustible surface overhead	30" (76.2 cm)
②	Minimum clearance to left/right wall	5" (12.7 cm)
③	Maximum depth for cabinets above countertops	13" (33.0 cm)
④	Front edge of the range side panel forward from cabinet	2 1/4" (6.3 cm)
⑤	To cabinets below cooktop and at the range back	0"
⑥	Minimum opening in overhead cabinets	30" (76.2 cm)
⑦	Minimum distance from countertop to overhead cabinets at side	15" (38.1 cm)
⑧	Height of countertop	36" (91.4 cm)

NOTE

- ① 30" (76.2 cm) minimum clearance between the top of the cooking surface and the bottom of an unprotected wood or metal cabinet; or 24" (60.9 cm) minimum when bottom of wood or metal cabinet is protected by not less than 1/4" (0.64 cm) flame retardant millboard covered with not less than no. 28MSG sheet steel, 0.015" (0.381 mm) stainless steel, 0.024" (0.610 mm) aluminum or 0.020" (0.508 mm) copper.
- ⑦ 15" (38.1 cm) minimum between countertop and adjacent cabinet bottom.
- Important – Save for the use of the local electrical inspector.
- For installation in Canada, a free-standing range is not to be installed closer than 15/32" (12 mm) from any adjacent surface.

