

**SUMMIT**

# SDR241OS



17.75" x 23.38" x 22" (H x W x D)

24" wide single drawer all-refrigerator approved for outdoor, residential, and commercial use, built-in capable or freestanding, with digital thermostat, frost-free operation, and panel-ready stainless steel drawer

## Highlights:

Commercially approved to ETL-S to NSF-7 and UL-471 standards for commercial settings

Flexible design allows built-in or freestanding use in 24" wide spaces

Weatherproof construction for safe use in the outdoors


## Product Features:

24" wide single drawer refrigerator	2 cu.ft. all-refrigerator in a single drawer style to complete any indoor or outdoor kitchen space
Weatherproof design for outdoor use	Durable construction allows safe installation in outdoor kitchens
Commercially approved	ETL-S listed to NSF-7 standard and meets UL-471 for use in commercial settings
Built-in capable	Front-breathing design allows you to build the drawer into cabinetry
Panel-ready drawer front	Drawer accepts an overlay panel to let you seamlessly blend the unit into an existing cabinetry design (panel dimensions: 15.6" H x 23.4" W at 3/4" maximum thickness)
304 grade stainless steel drawer	Drawer front and interior constructed from stainless steel for added durability and easy cleanability
Frost-free operation	Minimum user maintenance with a fully no-frost operation system
Digital thermostat	Electronic controls located on the top drawer ensure easy temperature management, with an external readout of Celsius or Fahrenheit
LED lighting	Elegant LED lighting in a gentle white hue illuminates the refrigerator for an easy view of the interior


## SDR241OS Specifications:

Overview	
Nominal Height	18.0" (46 cm)
Height of Cabinet	17.75" (45 cm)
Nominal Width	24.0" (61 cm)
Width	23.38" (59 cm)
Nominal Depth	22.0" (56 cm)
Depth	22.0" (56 cm)
Depth with Handle	23.5" (60 cm)
Depth with door at 90°	37.88" (96 cm)
Capacity	2.0 cu.ft. (57 L)
Defrost Type	Frost-Free
Door	Stainless Steel/Panel-Ready
Cabinet	Black
US Electrical Safety	ETL
Canadian Electrical Safety	ETL-C
Sanitation	ETL-S
Energy Usage/Year	265.0kWh/year
Amps	1.0
Voltage/Frequency	115 V AC/60 Hz
Weight	62.0 lbs. (28 kg)
Parts & Labor Warranty	1 Year
Compressor Warranty	5 Years
UPC	761101089119
Refrigerator Features	
Sabbath Mode	Yes
Door Swing	Drawer
Reversible	No
Shelf Type	Glass
Shelf Qty	1
Adjustable Shelves	Yes
Thermostat Type	Digital
Fan Type	Interior and Exterior
Refrigerant Type	R600a
Refrigerant Amount	0.85oz.
High Side PSI	270.0
Low Side PSI	105.0

Level Legs Qty	4
Interior Light	Yes
Temperature Range	36 to 43°F
Sound Level	32.6 dB
Dimensions	
Interior Height	13.0" (33 cm)
Interior Width	17.75" (45 cm)
Interior Depth	15.5" (39 cm)
Compressor Step Height	6.5" (17 cm)
Compressor Step Width	17.75" (45 cm)
Compressor Step Depth	4.5" (11 cm)

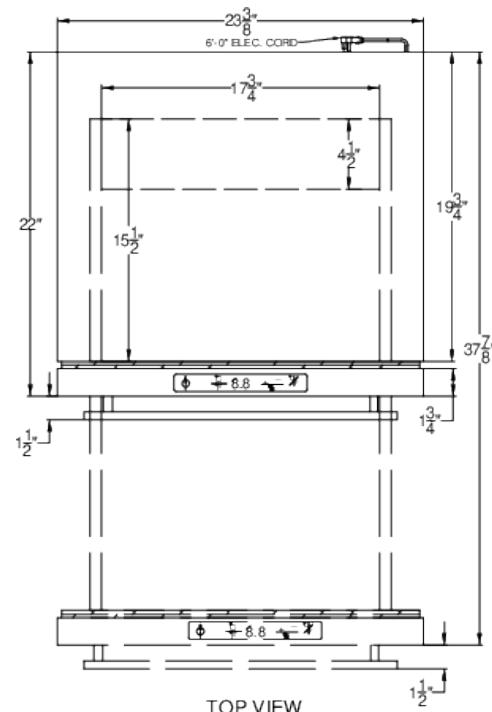

TOP VIEW

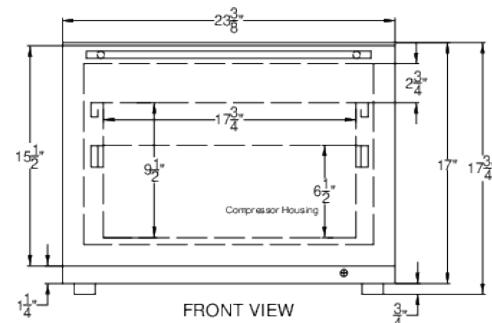

FRONT VIEW