

24" STEAM AND CONVECTION WALL OVEN

JBS7524BS - 23½" x 18" x 22½"

PRODUCT DIMENSIONS



FRONT VIEW




TOP VIEW

МО	ODEL # JBS75		24BS	
		in	cm	
Α	Overall width	231/2	59.5	
В	Height of control panel	33/4	9.5	
С	Space between control panel and door	3/16	0.4	
D	Height to top of handle	13½	34.2	
Е	Height of door	141//8	35.6	
F	Overall height	18	45.5	
G	Width of recessed oven	217//8	55.5	
Н	Width of conduit channel	11/16	2.7	
ı	Depth of recessed oven	19%	49.7	
J	Depth with door	203//8	51.7	
K	Depth with handle	221/4	56.5	
L	Depth with door fully open	33%	86.0	


24" STEAM AND CONVECTION WALL OVEN JBS7524BS - 231/2" x 18" x 221/4"

DIMENSIONS AS INSTALLED

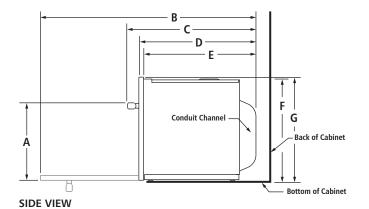

МО	DEL#	JBS7524BS	
		in	cm
Α	Height to top of handle	13½	34.2
В	Depth with door fully open	33%	86.0
С	Depth with handle	221/4	56.5
D	Depth with door	203//8	51.7
Е	Depth of recessed oven	195/8	49.7
F	Height of recessed oven	17⅓	44.7
G	Overall height	18	45.5

TRIM KIT DIMENSIONS




		30"		27"	
		in	cm	in	cm
Α	Overall width	29¾	75.6	267/8	68.2
В	Width of frame	3	7.6	1 1/2	3.8
С	Overall height	18	45.5	18	45.5
D	Depth of frame	7/8	2.1	7/8	2.1

24" STEAM AND CONVECTION WALL OVEN

JBS7524BS - 23½" x 18" x 22¼"

OPENING/CLEARANCE DIMENSIONS

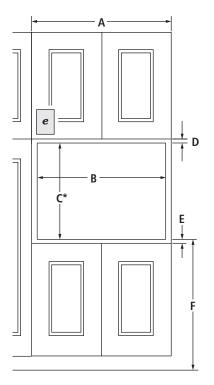

FRONT VIEW

MODEL #		JBS7524BS	
		in	cm
Α	Width of cabinet (min.)	235/8	60.0
В	Width of cutout	211//8	55.6
C *	Height of cutout (recommended)	17¾	45.0
D	Top of cutout to bottom of upper cabinet door or counter (min.)	1/2	1.2
E	Bottom of cutout to top of lower cabinet door/drawer (min.)	1/2	1.2
F	Bottom of cutout to floor	23 ⁵ / ₈ - 51 ¹ / ₄	60.0- 130.0
G	Depth of cutout (min.)	213/4	55.0
e	Recommended junction box location		

^{*}Will fit cutout height from $17^{3}/_{4}$ " (45.0 cm) to $17^{7}/_{8}$ " (45.4 cm).

ELECTRICAL REQUIREMENTS


A 120 Volt, 60 Hz, AC only 15- or 20- amp fused, grounded electrical circuit is required. A time-delayed fuse or dedicated circuit is recommended.

A grounded 3-prong outlet should be located in the upper cabinet. Do not use an extension cord.

CABINET REQUIREMENTS

Ε


Support structure must be able to support 99.2 lb (45 kg) including steam oven and contents.

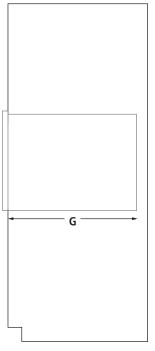

SIDE VIEW

UNDER COUNTER INSTALLATION (without cooktop installed above)

e



BACK VIEW

